

CTSKETCH: COMPOSITIONAL TENSOR SKETCHING FOR SCALABLE NEUROSYMBOLIC LEARNING

Seewon Choi, Alaia Solko-Breslin*
University of Pennsylvania
{seewon, alaia}@seas.upenn.edu

Rajeev Alur & Eric Wong
University of Pennsylvania

ABSTRACT

Many computational tasks benefit from being formulated as the composition of neural networks followed by a discrete symbolic program. The goal of neurosymbolic learning is to train the neural networks using only end-to-end input-output labels of the composite. We introduce CTSketch, a novel, scalable neurosymbolic learning algorithm. CTSketch uses two techniques to improve the scalability of neurosymbolic inference: decompose the symbolic program into sub-programs and summarize each sub-program with a sketched tensor. This strategy allows us to approximate the output distribution of the program with simple tensor operations over the input distributions and summaries. We provide theoretical insight into the maximum error of the approximation. Furthermore, we evaluate CTSketch on many benchmarks from the neurosymbolic literature, including some designed for evaluating scalability. Our results show that CTSketch pushes neurosymbolic learning to new scales that have previously been unattainable by obtaining high accuracy on tasks involving over one thousand inputs.¹

1 INTRODUCTION

Many computational tasks can be formulated as the composition of neural networks whose outputs are fed into a discrete program. Neurosymbolic learning aims to solve the problem of training the neural network using only end-to-end labels of the composite. Concretely, given a parameterized neural network M_θ , a fixed symbolic program c , and training data $((x_1, \dots, x_n), y)$, the goal is to minimize the loss $\mathcal{L}(c(M_\theta(x_1, \dots, x_n)), y)$ to optimize θ . The key challenge concerns computing the output distribution of c with respect to its input distributions while ensuring the loss is fully differentiable.

One solution to this problem is to encode c as a differentiable logic program. Scallop (Li et al., 2023) is a framework that uses probabilistic Datalog to specify the symbolic program c . Scallop can be configured with different provenance semirings which determine how to aggregate proofs of each fact when evaluating a query. However, one limitation of logic programming frameworks is that they do not support external API calls to black-box modules within the symbolic program. This means that they cannot use large language models (LLMs) to perform reasoning, which can be useful for certain tasks. For example, scene recognition has a natural decomposition of an object detector followed by a program that prompts an LLM to classify the scene based on the object predictions.

There are other neurosymbolic learning solutions that instead treat c as a black-box which can be encoded in any language and can include API calls. ISED Solko-Breslin et al. (2024) and IndeCater De Smet et al. (2023a) are techniques which fall into this category, as they both sample inputs to c , and compute the corresponding outputs, to associate rewards with inputs. A-NeSI (van Krieken et al., 2023) is another black-box technique that uses a neural network to perform approximate inference over the *weighted model counting* (WMC) problem—the problem of computing the probability of each possible output by adding the probabilities of the corresponding input assignments, which is known to be computationally expensive (Chavira & Darwiche, 2008). While black-box learning algorithms can learn tasks that cannot be encoded as differentiable logic programs, they suffer from slow convergence and low accuracy on tasks with many inputs. This raises the ques-

*Equal Contribution.

¹Code is available at <https://github.com/alaiasolkobreslin/CTSketch>

tion: can one design a more scalable solution by combining the strengths of white- and black-box techniques?

We propose CTSketch, a learning algorithm that uses two techniques to significantly improve the scalability of neurosymbolic inference: decompose the symbolic program into *sub-programs* and summarize each sub-program with a sketched tensor. We first describe the decomposed structure of the symbolic component, where each sub-program has an associated tensor summarizing its input-output combinations. In this architecture, inference proceeds through the layers by computing the product of each summary tensor and the corresponding input probabilities. The resulting distributions are passed on to the next layers as inputs, and this process repeats until the last layer produces the final output distribution. The program structure can be flexible depending on the task; for programs in which the internals are known, we can manually specify sub-programs that form a tree structure. This decomposition is useful for programs with a large number of inputs, whose summaries are not computationally affordable to be stored in a single tensor. On the other hand, CTSketch can also learn with a black-box program as long as its summary can be captured by a single tensor.

We use tensor sketching methods to reduce the size of sub-program summaries and increase the efficiency of inference. We use *sketches* of each summary, which can be derived via a low-rank tensor decomposition method such as Tensor-Train SVD (TT-SVD) (Oseledets, 2011) or Tucker factorization (Kolda & Bader, 2009). These techniques efficiently decompose a high-dimensional tensor into a product of low-rank tensors with low reconstruction error. With these sketches, we can perform inference via simple tensor operations and efficiently obtain the expected value of the output. From the reconstruction error of the decomposition methods, we derive a bound on the maximum error of the approximation of the output distribution, providing insight into the performance of CTSketch.

In summary, the main contributions of this paper are as follows. First, we introduce program decomposition as a way to scale neurosymbolic learning. Next, we introduce CTSketch, a scalable algorithm for learning such neurosymbolic programs using composed tensor sketches. Then, we derive a bound on the maximum error of the approximation obtained by CTSketch. Finally, we conduct a thorough evaluation using state-of-the-art neurosymbolic frameworks against a diverse set of benchmarks. Our results demonstrate that CTSketch pushes the frontier of neurosymbolic learning. In particular, it can solve the task of adding one thousand handwritten digits, which is a significantly larger problem than what prior works could solve, while remaining competitive with existing techniques on standard neurosymbolic learning benchmarks.

2 OVERVIEW

2.1 PROBLEM STATEMENT

For a task that involves unstructured inputs (x_1, \dots, x_n) , the training pipeline consists of neural networks M with parameters θ , followed by a symbolic program $c : R_1 \times \dots \times R_n \rightarrow Y$ that computes a structured output y given structured inputs r_1, \dots, r_n . For each input x_i , the neural network outputs a probability distribution p_i over discrete values (symbols) in R_i . We aim to estimate the distribution of the outputs of c given the input distributions p_i , with the goal to optimize θ using only end-to-end training data $((x_1, \dots, x_n), y)$, without intermediate supervision on r .

In order to predict the probability of each output $\hat{y} \in Y$ given input distributions p_1, \dots, p_n , we aim to approximate the following WMC problem

$$\text{WMC}(\hat{y}|p_1, \dots, p_n) = \sum_{c(r_1, \dots, r_n) = \hat{y}} \prod_{i=1}^n p_i[r_i] \quad (2.1)$$

using tensors that *summarize* the program. We summarize the input-output pairs of the program using a single tensor $\phi : Y^{|R_1| \times \dots \times |R_n|}$ which maps each input combination to its corresponding program output. It is also useful to represent ϕ using a one-hot tensor $\phi^{\text{OH}} : \{0, 1\}^{|R_1| \times \dots \times |R_n| \times |Y|}$:

$$\phi^{\text{OH}}[r_1, \dots, r_n, \hat{y}] = \begin{cases} 1 & c(r_1, \dots, r_n) = \hat{y} \\ 0 & \text{otherwise.} \end{cases}$$

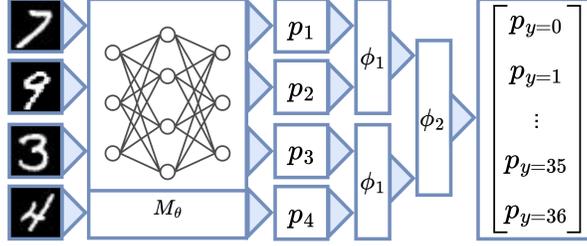


Figure 1: Program decomposition for sum_4 . ϕ_1 computes the sum of 2 digits, and ϕ_2 computes the sum of results from the first sums.

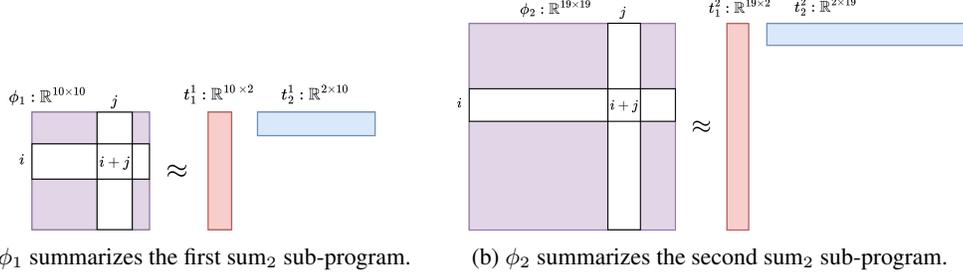


Figure 2: ϕ_1 and ϕ_2 for decomposed sum_4 without sketching (left) and with sketching (right). Sketching ϕ_i involves decomposing it as the product of rank-2 tensors t_1^i and t_2^i

During inference, after obtaining predicted distributions $p_i : [0, 1]^{|R_i|}$ from the network, we can initialize p to be their outer product, i.e., $p = \otimes_{i=1}^n p_i$, and compute the probability of each output $\hat{y} \in Y$, using Equation 2.1 with ϕ^{OH} as the indicator function:

$$p_{y=\hat{y}} = \sum_{r_1, \dots, r_n} \phi^{\text{OH}}[r_1, \dots, r_n, \hat{y}] \cdot p[r_1, \dots, r_n]. \quad (2.2)$$

The problem with this approach is that the size of ϕ increases exponentially with the number of inputs, limiting its scalability. To address this challenge, we decompose ϕ and use a low-rank approximation of each component.

2.2 PROGRAM DECOMPOSITION AND SKETCHING

To decompose ϕ for a given task, it is necessary to manually separate ϕ into multiple sub-programs. For instance, the program that adds four handwritten digits can be decomposed as the sum of two sums (Fig. 1). The inputs to the first 2-digit sum ϕ_1 are the neural network predictions of the digits, i.e., $p_i^1 = M_\theta(x_i)$. Inference through this first layer outputs distributions p_j^2 , i.e., inputs to the second sum ϕ_2 .

While CTSketch can use any tensor sketching algorithm, we explain our method with tensor-train singular value decomposition (TT-SVD) (Oseledets, 2011). The goal of TT-SVD is to find low-rank tensors, called *cores*, that reconstruct the original tensor with low error (Fig. 2). Given a desired approximation rank ρ , each core t_i is built by reshaping the tensor into a matrix by flattening all except the i -th dimension, applying truncated SVD, and taking the top ρ right singular vectors. With a large enough rank, TT-SVD can achieve arbitrarily small error. Although this involves performing SVD on large matrices, our evaluation demonstrates that this overhead is negligible, costing less than a second for all benchmarks.

We use TT-SVD to sketch each sub-program summary $\phi_i : Y^{|R_1| \times \dots \times |R_d|}$. Given rank ρ , TT-SVD outputs cores (t_1^i, \dots, t_d^i) where $t_1^i : \mathbb{R}^{1 \times |R_1| \times \rho}$, $t_d^i : \mathbb{R}^{\rho \times |R_d| \times 1}$, and all other $t_j^i : \mathbb{R}^{\rho \times |R_j| \times \rho}$. The full tensor reconstruction \mathcal{T} is defined as

$$\mathcal{T}[l_1, \dots, l_n] = \sum_{k_1, \dots, k_{d-1}} \prod_{j=1}^n t_j^i[k_{j-1}, l_j, k_j] \quad (2.3)$$

where $k_0 = 1$ and $k_d = 1$. Note that we do not fully reconstruct \mathcal{T} during inference in CTSketch, as this would not reduce memory overhead. Instead, we take the product of individual cores and input distributions to get an approximate output. We describe this process in more detail in §3.2.

Algorithm 1 CTSketch training algorithm

Require: Symbolic programs c_1, \dots, c_m where c_i takes d_i inputs and outputs $y \in |Y_i|$, neural network M_θ , loss function \mathcal{L} , and training dataset \mathcal{D} .

function TRAIN(\mathcal{D})

for $i = 1, \dots, m$ **do**

$t_1^i, \dots, t_{d_i}^i \leftarrow \text{INITIALIZE}(c_i)$

for $((x_1, \dots, x_n), y) \in \mathcal{D}$ **do**

$(p_1^1, \dots, p_n^1) \leftarrow M_\theta(x_1, \dots, x_n)$

for $i = 1, \dots, m$ **do**

$(p_1, \dots, p_{d_i}) \leftarrow \text{INPUTS}(c_i)$

$v_i = \sum_x^{p_1^1} t_1^i[x] p_1[x]$

for $k = 2, \dots, d_i$ **do**

$v_i = \sum_a^\rho \sum_x^{p_k^1} v_i[a] t_k^i[a, x] p_k[x]$

for $j = 1, \dots, |Y_i|$ **do**

$p^{i+1}[j] \leftarrow \text{RBF}(v_i, j)$

$p^{i+1} \leftarrow \text{norm}(p^{i+1})$

$l \leftarrow l + \mathcal{L}(v_m, y)$

 optimize l and update θ

▷ Eqn. 3.1

This strategy differs from prior works on neurosymbolic scalability. The most closely related work is A-NeSI, which learns a neural network (prediction model) to predict the WMC result given probability distributions from the perception network (inference model). Therefore, the weights of both the inference and prediction models are learned during training. CTSketch circumvents this additional training complexity by requiring the task-specific program architecture to be user-defined and initialized by iterating through all (or some subset) of input-output pairs. These initialized tensors accurately capture the program semantics, and after sketching, the WMC approximation is still very accurate because sketching methods guarantee low error. This is in contrast to the DNN used by the inference model in A-NeSI, which can be trained to achieve high accuracy but lacks a theoretical guarantee on the error of the estimate.

3 CTSKETCH

3.1 ALGORITHM

When the symbolic program c has many inputs, we manually decompose it into sub-programs that form a tree structure of m layers. The computation proceeds sequentially from layer 1 to m , while the sub-program computations within a layer can be parallelized. The sub-program at layer i can take output distributions $p^{j \leq i}$ as inputs, where p^1 refers to neural network predictions. For each sub-program, the inputs and the output dimension need to be specified. For the sum_4 case (Fig. 1), the input specification would be $c_1^1 : (p_1^1, p_2^1)$, $c_2^1 : (p_3^1, p_4^1)$ and $c_1^2 : (p_1^2, p_2^2)$. Without loss of generality, we assume in the remaining sections that there is only one program in each layer to simplify the notation. For example, we consider the sum_4 program to consist of three layers with sub-programs c_1 , c_2 , and c_3 .

We state the CTSketch algorithm using pseudocode in Algorithm 1 and describe its steps using sum_4 . Prior to training, CTSketch initializes each ϕ_i , using c_i , either by sampling a subset of the possible inputs to the sub-program or enumerating all possibilities and computing the corresponding outputs. After initializing each ϕ_i , the algorithm computes $(t_1^i, \dots, t_{d_i}^i)$, the cores obtained from sketching ϕ_i . We call this initialization procedure INITIALIZE. Note that the rank ρ of the decomposition is a hyperparameter and can be chosen to be the full rank that equals the minimum product of the preceding or succeeding dimensions, $\min_i \left(\prod_{k=0}^{i-1} |R_k|, \prod_{k=i+1}^d |R_k| \right)$. In this case, the i -th core would exactly match the original tensor flattened into three dimensions, and the others would be the identity, ensuring a reconstruction error of zero.

Continuing with the pseudocode in algorithm 1, CTSketch considers each item $((x_1, \dots, x_n), y)$ from the training dataset and its neural network predictions $(p_1^1, \dots, p_n^1) = M_\theta(x_1, \dots, x_n)$ (line

5). CTSketch performs inference by going layer-by-layer through the program, where we compute the expected value of the output for each sub-program.

3.2 SKETCHING SUB-PROGRAMS

We explain tensor sketching and inference by continuing with the sum_4 example. Assuming we use rank-2 TT-SVD decomposition, the program summary ϕ_1 of the first layer decomposes into two rank-2 tensors t_1^1 and t_2^1 , which are multiplied with network predictions p_1^1 and p_2^1 to produce $v \in \mathbb{R}$ (Lines 8 - 10).

$$v = \sum_a^{|R_1|} \sum_b^{|R_2|} \sum_x^2 p_1^1[a] p_2^1[b] t_1^1[a, x] t_2^1[x, b]$$

We apply the RBF kernel and L_1 normalization to convert the value into a probability distribution, to be used as input in the following layers (Lines 11 - 13).

$$p_1^2[j] = \text{RBF}(v, j) = \exp\left(-\frac{1}{2\sigma^2} \|v - j\|_2\right) \quad (3.1)$$

Such transformation is not needed for the last layer, where the value can be directly compared with the ground truth for the loss computation (e.g., using L_1 loss). Hence, the final output space, computed by the last layer, can be infinite (e.g., floating-point outputs).

For programs with a finite output space, we can instead decompose the program summary ϕ_1^{OH} and obtain three rank-2 tensors: t_1^1 , t_2^1 and t_3^1 . Multiplying these with network predictions p_1^1 and p_2^1 results in a distribution $p_1^2 \in \mathbb{R}^{19}$.

$$p_1^2[j] = \sum_a^{|R_1|} \sum_b^{|R_2|} \sum_x^2 \sum_y^2 p_1^1[a] p_2^1[b] t_1^1[a, x] t_2^1[x, b, y] t_3^1[y, j]$$

The two distributions p_1^2 and p_2^2 are input to the second layer, and repeating this process produces the final distribution to be used for the loss computation. Note that the tensor sketches are used only during training, and we use the symbolic program c at test time, using the argmax inputs $r_i = \underset{j \in |R_i|}{\text{argmax}}(M_\theta(x_i))$.

3.3 APPROXIMATION ERROR BOUND

Suppose that we use TT-SVD to decompose ϕ_i , and the tensor reconstructed from the cores is \mathcal{T}_i (Equation 2.3). Let ε_k be the *truncation error* of the decomposition: for the k th core, ε_k is the Frobenius norm of the singular values discarded during the truncation step. With this, we can state the bound on the reconstruction error.

Theorem 3.1 Oseledets (2011). The reconstruction error of \mathcal{T} satisfies

$$\|\phi_i - \mathcal{T}_i\|_F \leq \sqrt{\sum_{k=1}^{d-1} \varepsilon_k^2}. \quad (3.2)$$

In practice, we find that the reconstruction error is very low even for small values of ρ . For example, in the sum_n task, where the goal is to predict the sum of n digits, we decompose the program into $\log_2(n)$ layers, with each sub-program computing the sum of its two inputs. Even for sum_{1024} , where the sub-program for the final layer ϕ_{10} has shape 4609×4609 , rank 2 is enough to give us a reconstruction error $\leq 1e-5$ for all layers. With such low reconstruction error, we can also guarantee that the product of each \mathcal{T}_i with the corresponding input distribution will have very low error. This allows us to derive a bound on the error of the output distribution if we were to do a full reconstruction of ϕ_i .

Theorem 3.2 (CTSketch error bound). For input distribution p , The error of the output distribution is bounded by

$$\|\phi_i^{\text{OH}} p - \mathcal{T}_i^{\text{OH}} p\|_2 \leq \sqrt{2} \|p\|_F \|\phi_i - \mathcal{T}_i\|_F \quad (3.3)$$

We provide a short proof, which uses the Cauchy-Schwartz inequality, in Appendix A. While using the full reconstruction is not exactly how CTSketch performs inference, it still gives us a good idea of how well the algorithm approximates the final distribution. CTSketch will take the product of each core, without reconstruction, with the respective input distribution and obtain an expected value of the output. This is then converted to a distribution with the RBF kernel and L_1 normalization.

4 EVALUATION

In this section, we evaluate CTSketch and aim to answer the following research questions:

RQ1: Can CTSketch learn tasks with a large number of inputs, which are not solvable by existing methods?

RQ2: How does CTSketch perform on benchmarks that can be solved by existing techniques?

RQ3: How efficiently does CTSketch learn, i.e., how quickly does it converge compared to the baselines?

RQ4: How does the approximation rank of CTSketch influence its performance and training time?

4.1 BENCHMARK TASKS

We consider tasks from the neurosymbolic learning literature, including some designed for evaluating scalability.

MNIST Sum. We consider the problem of computing the sum of handwritten digits (sum_n) from the MNIST dataset (Lecun et al., 1998). We use sums of $n = 2^k$ digits, where $k \in \{2, 4, 6, 8, 10\}$. Each task uses a training set of 5K samples and a testing set of 1K samples.

Multi-digit Addition. We use the Multi-digit MNISTAdd task (add_n), originally proposed by Manhaeve et al. (2018), where the goal is to compute the sum of two n -digit numbers. We use $n \in \{1, 2, 4, 15, 100\}$ with a training set of $60,000/2n$ samples and a test set of $10,000/2n$ samples.

Visual Sudoku. We use the ViSudo-PC dataset Augustine et al. (2022) containing 200 4x4 and 2K 9x9 training and test Sudoku boards. The goal of this task is to predict whether the given image is a valid sudoku board.

Sudoku Solving. The goal of this task is to solve a 9 x 9 Sudoku puzzle, where the board is given as sequence of MNIST images with the digit 0 representing an empty cell. We use the SatNet (Wang et al., 2019) dataset with 9K training examples and 500 test examples and follow the same experimental setup as Cornelio et al. (2023).

HWF. The Hand-Written Formula (HWF) task uses a dataset from Li et al. (2020) of 10K formulas of length 1-7 containing handwritten images of digits and operators. The dataset includes 1K length 1 formulas, 1K length 3 formulas, 2K length 5 formulas, and 6K length 7 formulas. The goal is to predict the result of the formula evaluation.

Leaf Identification and Scene Classification. We include two tasks from Solko-Breslin et al. (2024) which use GPT-4 to perform reasoning in the symbolic component for leaf identification and scene recognition, using datasets from Chouhan et al. (2019) and Murmann et al. (2019) respectively. The goal is to identify a leaf species from the predicted features or classify a scene from the predicted objects.

4.2 BASELINES AND EXPERIMENTAL SETUP

We choose several neurosymbolic techniques as baselines, with some designed specifically for scalability. We include Scallop (Li et al., 2023), a framework that uses probabilistic Datalog to specify the symbolic component, and has been shown to outperform DeepProbLog Manhaeve et al. (2018). We also compare with DeepSoftLog (DSL) Maene & De Raedt (2023) for MNIST sum and multi-digit addition, but omit for other tasks since it cannot encode programs that use GPT-4 (leaf, scene), and requires customized solutions in which encoding complex reasoning is difficult (visudo, sudoku, hwf). We also consider IndeCateR (De Smet et al., 2023a), a scalable gradient estimator with lower variance than REINFORCE (Williams, 1992), ISED (Solko-Breslin et al., 2024) that uses sampling

Table 1: Test accuracy results for sum_n . The reference approximates the accuracy of an MNIST predictor with 0.99 accuracy using 0.99^n .

Method	Accuracy (%)				
	sum_4	sum_{16}	sum_{64}	sum_{256}	sum_{1024}
Scallop	88.90 ± 10.78	8.43 ± 1.56	TO	TO	TO
DSL	94.13 ± 0.82	2.19 ± 0.51	TO	TO	TO
IndeCateR	92.55 ± 0.87	83.01 ± 1.18	44.43 ± 10.19	0.51 ± 0.34	0.60 ± 0.23
ISED	90.79 ± 0.81	73.50 ± 2.73	1.50 ± 0.34	0.64 ± 0.26	ERR
A-NeSI	93.53 ± 0.35	17.14 ± 2.87	10.39 ± 0.92	0.93 ± 0.80	1.21 ± 1.28
CTSketch (Ours)	92.17 ± 0.43	83.84 ± 0.92	47.14 ± 3.29	7.76 ± 1.43	2.73 ± 0.81
Reference	96.06	85.15	52.56	7.63	0.003

and a summary logic program to obtain a custom loss, and A-NeSI (van Krieken et al., 2023), a framework for approximating WMC results by training a neural estimator.

We run all experiments on a machine with one 14-core Intel i9-10940X CPU, one NVIDIA RTX 3090 GPU, and 66 GB of RAM. We run each task with 10 random seeds and apply a timeout of 5 seconds per training example. We choose the number of epochs used for each technique based on when training saturates. For MNIST tasks, we use LeNet (Lecun et al., 1998), a 2-layer CNN-based model, and we use a similar architecture for HWF and leaf. For the scene task, we use YOLOv8 (Redmon et al., 2016) and a 3-layer CNN to detect objects. We also select the sample count, a key hyperparameter used in IndeCateR and ISED, based on the task, with the goal of balancing training time while also giving the frameworks enough samples to learn. We describe the choices of other hyperparameters as well as the task decompositions in Appendices B.1 and B.2.

4.3 RQ1: SCALABILITY

To answer **RQ1**, we increase the number of inputs to the sum_n task up to 1024, which is orders of magnitude larger than previously studied input spaces. We report the sum_n results for $n \in \{4, 16, 64, 256, 1024\}$ in Table 1. The reference refers to the accuracy when the perception model achieves 99% accuracy on individual digit recognition.

CTSketch is the best performer on all $n \geq 16$, and is the only method to consistently match the reference accuracy. All of the baseline methods fail to learn sum_{256} , whereas CTSketch also works for sum_{1024} . Even with a very weak supervision on only the final sum of 1024 digits, CTSketch attains a per-digit accuracy of 93.69%. Although A-NeSI reaches similar accuracy, its per-digit accuracy stays at 17.92%, implying that the result is due to a small dataset size and redundant use of training images.

While IndeCateR is overall the next best method, it faces a limit at 256 inputs, and struggles even with 25,600 samples per example. ISED requires the most computational resources, and exceeds the machine availability for $n \geq 64$, using the same sample count as IndeCateR. Hence, we reduce the samples counts to 6,400 and 1,024 for sum_{64} and sum_{256} , respectively, which results in a significant drop in performance. We report an error (ERR) for sum_{1024} since even a sample count of one does not work.

Scallop, DSL, and A-NeSI are unable to learn efficiently from sum_{16} . Scallop times out with top-1 proofs for $n \geq 64$ since there are exponentially many number of input combinations to consider. By manually embedding the exact WMC inference, DSL attains the highest accuracy for sum_4 . However, the exact inference times out for sum_{16} , and we use the alternative of training a surrogate neural network to predict the inference results. This neural embedding is unable to achieve high accuracy and eventually times out. A-NeSI also attempts to do neural approximation, and similarly struggles to learn the inference model due to limited supervision.

4.4 RQ2: ACCURACY

We compare the test accuracy of CTSketch with the baselines across 11 tasks from the neurosymbolic learning literature. We summarize the results of visual sudoku (visudo), sudoku, hwf, leaf, and scene in Fig. 3, and we report the results for add_n in Table 2. Full results with standard deviations can be found in Table 4 in Appendix B.3. CTSketch is the highest performer on 4 tasks, including visudo₉, sudoku, and scene. Of all tasks in which CTSketch does not obtain the highest accuracy, the largest difference in accuracy is in visudo₄, where CTSketch comes within 2.55% of

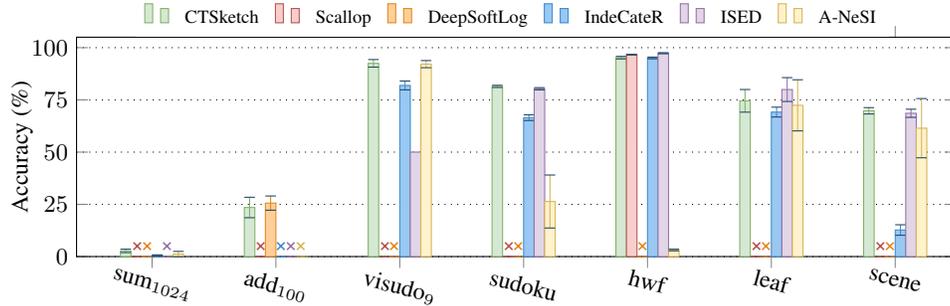


Figure 3: Test accuracy results for sum_{1024} , add_{100} , visudo_9 , sudoku , HWF , leaf , and scene tasks. “X” indicates that there was a timeout, there was an error/overflow, or the given task was not able to be programmed in the framework. Error bars show standard deviations.

Table 2: Test accuracy results for add_n . The reference approximates the accuracy of an MNIST predictor with 0.99 accuracy using 0.99^{2^n} .

Method	Accuracy (%)				
	add_1	add_2	add_4	add_{15}	add_{100}
Scallop	96.9 ± 0.5	95.3 ± 0.6	TO	TO	TO
DSL	98.4 ± 0.1	96.6 ± 0.3	93.5 ± 0.6	77.1 ± 1.6	25.6 ± 3.4
IndeCateR	97.7 ± 0.3	93.3 ± 1.3	89.0 ± 1.1	69.6 ± 2.1	ERR
ISED	91.4 ± 9.1	93.1 ± 3.3	89.7 ± 1.1	0.0 ± 0.0	0.0 ± 0.0
A-NeSI	97.4 ± 0.3	96.0 ± 0.5	92.1 ± 1.1	76.8 ± 2.8	ERR
CTSketch (Ours)	98.3 ± 0.2	96.7 ± 0.4	92.5 ± 1.1	74.8 ± 1.3	23.5 ± 4.9
Reference	98.01	96.06	92.27	73.97	13.40

A-NeSI. Furthermore, for every add_n task, CTSketch comes within 5.42% of the reference accuracy (of a 0.99 accuracy MNIST predictor) but often comes above the reference. These results demonstrate that even though CTSketch is designed for scalability, it can still solve a variety of classic neurosymbolic learning tasks.

No other baseline performs as consistently well as CTSketch across the benchmark tasks. Scallop times out of 5 of the tasks, and also cannot encode the leaf and scene tasks due to their use of GPT-4. The REINFORCE-based techniques, IndeCateR and ISED, do not scale as well as CTSketch because they cannot get a strong enough learning signal with the number of samples specified. IndeCateR lags behind on sudoku and scene , and ISED struggles with scaling to visudo_9 and add_n for large values of n . A-NeSI does poorly on complex reasoning tasks like sudoku_9 and hwf , and exhibits high variance. This is because A-NeSI trains an additional neural network to estimate the WMC result, and learns best when there is stronger supervision than what is provided in some tasks. For example, A-NeSI scales well for add_n where we provide per-digit supervision for the multi-digit output, but fails to scale for tasks like sum_{1024} where the output space is large and there is weak supervision on the final output.

4.5 RQ3: COMPUTATIONAL EFFICIENCY

We compare CTSketch to the baselines in terms of their test accuracy over time on two of the tasks: add_{15} and add_{100} . While the per-epoch accuracy improvement for CTSketch is not always the highest, CTSketch learns far faster than the baselines because of how efficiently it performs inference: the average epoch times for add_{15} and add_{100} are 1.70 and 0.92 seconds, respectively. The next fastest methods for add_{15} were IndeCateR, taking 23.07 seconds, and A-NeSI, taking 52.72 seconds per epoch on average. While DSL shows comparable accuracy to CTSketch on these tasks, we find that its learning is prohibitively slow, taking over 20 minutes per epoch. For some tasks, CTSketch converges before DSL even completes one training epoch. We can attribute this difference to the efficiency of inference in CTSketch. While other techniques require training of a prediction network (as in A-NeSI) or learning a neural embedding (as in DSL), CTSketch requires only a short sequence of tensor operations to perform inference.

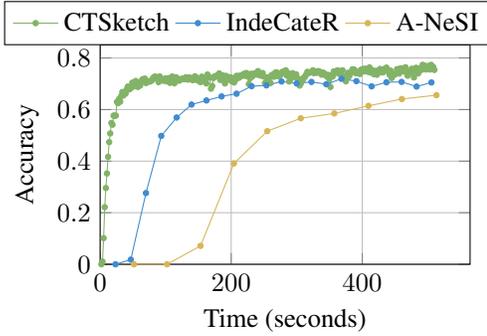


Figure 4: Accuracy vs. Time for add_{15} for IndeCateR, A-NeSI, and CTSketch.

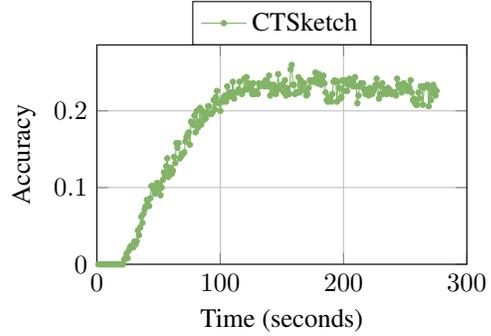


Figure 5: Accuracy vs. Time for add_{100} for CTSketch.

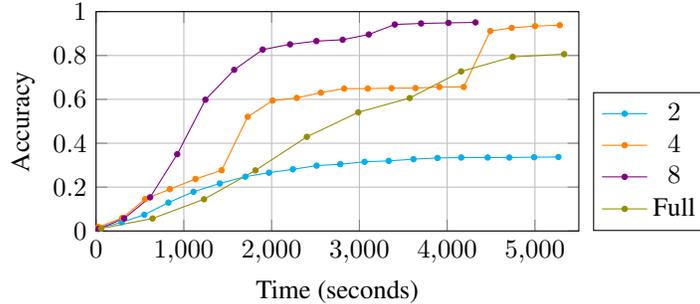


Figure 6: Accuracy vs. Time for different ranks $\rho \in \{2, 4, 8, \text{full}\}$.

In our experiments, we find that the overhead requirement of initializing and sketching sub-program summaries is very low, taking less than one minute for summary initialization and sketching across all tasks. This demonstrates that the overhead of sketching summaries is negligible when considering the performance improvement it provides, allowing for extremely efficient inference and fast convergence.

4.6 RQ4: SKETCHING RANK

We study how the rank of sketching affects the accuracy and training time with the HWF task. We vary the rank $\rho \in \{2, 4, 8, \text{full}\}$ for sketching the largest tensor, which is of size 14^7 . We plot accuracy against time in Figure 6, where we mark the test accuracy for every 10 epochs during the first 1.5 hours of training. The comparison between the full rank and the others demonstrates the advantage of sketching: when an appropriate rank is used, CTSketch can converge much faster without sacrificing accuracy. While the training time for a single epoch is similar across the lower ranks, it takes about twice the time using the full rank tensor. Consequently, while the rank-8 tensor converges to 95% accuracy in 70 minutes, the full rank tensor is still around 80% after 90 minutes.

The learning curve for rank 2 implies that the rank should be sufficiently large, or the neural network will fail to learn the optimal weights even with more training. We see time and space trade-off in ranks 4 and 8. Since the number of entries for the sketched tensor is $(5\rho^2 + 2\rho) \times 14$, rank 8 requires 3.82 times more memory, but takes 30% less time to reach 90% accuracy. This demonstrates that training is not particularly sensitive to the choice of the rank, and can be chosen flexibly depending on the available resources. It is useful to consider both the reconstruction error $\|\mathcal{T} - \phi\|_F$ and the maximum difference $\text{MAX}(|\mathcal{T} - \phi|)$ when deciding the rank. For example, the maximum error is above 60 for rank-4 approximation. Still, the model manages to learn as the reconstruction error is around 0.07, which corresponds to all entries in the tensor only differing by $1e-5$.

5 LIMITATIONS AND FUTURE WORK

The primary limitation of CTSketch lies in requiring manual decomposition of the program component to scale. When the full program summary tensor is computationally affordable, CTSketch is always applicable. However, when the input and output spaces are large, decomposition of the task is needed to fit in memory. The decomposition must be specified by the user, which may be difficult or impossible for complex tasks. In this sense, CTSketch can be viewed as a restrictive “language” in which not all tasks can be encoded. This motivates future work on automating the decomposition, possibly using program synthesis techniques.

Furthermore, it would be interesting to explore different tensor sketching methods and the trade-offs they provide. We are currently initializing the tensor by enumerating all possible input combinations upfront and applying low-rank decomposition. If we instead use a streaming tensor sketching method, we would iteratively refine the sketches with a subset of input-output pairs at each iteration. A small amount of time overhead to update the tensor sketches would result in a significant reduction in memory used.

6 RELATED WORK

Neurosymbolic WMC techniques. These frameworks provide techniques for computing the exact or approximate WMC result for a given input distribution and a program. Xu et al. (2018) proposed a semantic loss function for learning with symbolic knowledge, which measures how well neural network outputs satisfy a given constraint using sampling for the WMC approximation. DeepProbLog (Manhaeve et al., 2018) performs the exact WMC computation during inference, making it prohibitively expensive to use for complex tasks. Scallop (Li et al., 2023) offers a more scalable solution by using provenance semirings that determine which proof terms to drop in the WMC approximation. Other solutions focus on treating the symbolic component as a black-box that can be written in any language; ISED (Solko-Breslin et al., 2024) uses a sampling procedure, and A-NeSI (van Krieken et al., 2023) trains an additional neural network, to approximate the WMC result. While CTSketch and these methods both learn with a WMC estimate, CTSketch takes a different approach by performing inference using sketched tensor summaries. Inference in CTSketch does not aggregate proofs (as in Scallop and DeepProbLog), or require weight optimization of the approximation model (as in A-NeSI), resulting in more efficient learning.

Other logic programming frameworks. Other logic programming neurosymbolic techniques solve the learning problem without any exact or approximate weighted model counting during inference. Manhaeve et al. (2021) proposed extending DeepProbLog with approximate inference technique, called DPLA*, which involves an A*-like search to obtain a small set of best proofs for a given query. DeepStochLog (Winters et al., 2022) uses stochastic (rather than probabilistic) logic programming to encode neurosymbolic programs and uses SLD resolution to get the probability of deriving a certain goal. On the other hand, DeepSoftLog (Maene & De Raedt, 2023) uses soft-unification to integrate embeddings into probabilistic logic programming. DeepSeaProbLog (De Smet et al., 2023b) also extends DeepProbLog by offering support for discrete-continuous random variables and uses weighted model integration, which can handle infinite sample spaces unlike weighted model counting. Abductive learning techniques (Dai et al., 2019; He et al., 2024), which often use Prolog for the symbolic component, offer an alternative neurosymbolic solution that learns by abducing pseudo-labels from ground-truth labels. Unlike CTSketch, these works use logic programming languages, which can be restrictive for tasks that benefit from solutions that use API calls to large language models.

Other general neurosymbolic techniques. There also exist neurosymbolic techniques that do not require the program component to be specified as a logic program. IndeCateR (De Smet et al., 2023a) offers a lower variance gradient estimator than REINFORCE (Williams, 1992) and can scale to complex black-box neurosymbolic programs. NASR (Cornelio et al., 2023) is a REINFORCE-style algorithm suited for fine-tuning models such as neural Sudoku solvers and scene graph predictors. ISED (Solko-Breslin et al., 2024) also falls under this category of techniques that treat the neurosymbolic program as a black-box. While CTSketch is compatible with black-box programs, as in the leaf and scene tasks, the algorithm benefits from decomposing the symbolic component when there are many inputs. This allows CTSketch to scale far better than existing black-box neurosymbolic frameworks, but it requires manual effort to decompose complex tasks.

7 CONCLUSION

We proposed CTSketch, a framework that uses decomposed programs to scale neurosymbolic learning. During inference, CTSketch uses sketched tensors, each representing the summary of a sub-program, to efficiently approximate the output distribution of the symbolic component with simple tensor operations. Furthermore, we provide theoretical justification for our architecture and derive an error bound on the approximation. Our results show that CTSketch pushes the frontiers of neurosymbolic learning by solving previously unattainable tasks, such as adding over one thousand handwritten digits, with high accuracy.

ACKNOWLEDGEMENTS

This research was supported by ARPA-H program on Safe and Explainable AI under the award D24AC00253-00.

REFERENCES

- Eriq Augustine, Connor Pryor, Charles Dickens, Jay Pujara, William Yang Wang, and Lise Getoor. Visual sudoku puzzle classification: A suite of collective neuro-symbolic tasks. In *International Workshop on Neural-Symbolic Learning and Reasoning (NeSy)*, Windsor, United Kingdom, 2022.
- Mark Chavira and Adnan Darwiche. On probabilistic inference by weighted model counting. *Artificial Intelligence*, 172(6):772–799, 2008. ISSN 0004-3702. doi: <https://doi.org/10.1016/j.artint.2007.11.002>.
- Siddharth Singh Chouhan, Uday Pratap Singh, Ajay Kaul, and Sanjeev Jain. A data repository of leaf images: Practice towards plant conservation with plant pathology. In *2019 4th International Conference on Information Systems and Computer Networks (ISCON)*, pp. 700–707, 2019. doi: [10.1109/ISCON47742.2019.9036158](https://doi.org/10.1109/ISCON47742.2019.9036158).
- Cristina Cornelio, Jan Stuehmer, Shell Xu Hu, and Timothy Hospedales. Learning where and when to reason in neuro-symbolic inference. In *International Conference on Learning Representations*, 2023.
- Wang-Zhou Dai, Qiuling Xu, Yang Yu, and Zhi-Hua Zhou. Bridging machine learning and logical reasoning by abductive learning. In *Proceedings of the 33rd International Conference on Neural Information Processing Systems*, 2019.
- Lennert De Smet, Emanuele Sansone, and Pedro Zuidberg Dos Martires. Differentiable sampling of categorical distributions using the catlog-derivative trick. In *Proceedings of the 37th International Conference on Neural Information Processing Systems*, volume 36, pp. 30416 – 30428, 2023a.
- Lennert De Smet, Pedro Zuidberg Dos Martires, Robin Manhaeve, Giuseppe Marra, Angelika Kimmig, and Luc De Raedt. Neural probabilistic logic programming in discrete-continuous domains. In *Proceedings of the Thirty-Ninth Conference on Uncertainty in Artificial Intelligence*, volume 216, pp. 529–538, 2023b.
- Hao-Yuan He, Hui Sun, Zheng Xie, and Ming Li. Ambiguity-aware abductive learning. In Ruslan Salakhutdinov, Zico Kolter, Katherine Heller, Adrian Weller, Nuria Oliver, Jonathan Scarlett, and Felix Berkenkamp (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 18019–18042. PMLR, 21–27 Jul 2024.
- Tamara G. Kolda and Brett W. Bader. Tensor decompositions and applications. *SIAM Rev.*, 51: 455–500, 2009.
- Daniel Kressner, Bart Vandereycken, and Rik Voorhaar. Streaming tensor train approximation. *SIAM Journal on Scientific Computing*, 45(5):A2610–A2631, 2023. doi: [10.1137/22M1515045](https://doi.org/10.1137/22M1515045).
- Y. Lecun, L. Bottou, Y. Bengio, and P. Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.

-
- Qing Li, Siyuan Siyuan Huang, Yining Hong, Yixin Chen, Ying Nian Wu, and Song-Chun Zhu. Closed loop neural-symbolic learning via integrating neural perception, grammar parsing, and symbolic reasoning. In *Proceedings of the 37th International Conference on Machine Learning*, pp. 5884–5894, 2020.
- Ziyang Li, Jiani Huang, and Mayur Naik. Scallop: A language for neurosymbolic programming. *Proc. ACM Program. Lang.*, 7(PLDI), June 2023. doi: 10.1145/3591280. URL <https://doi.org/10.1145/3591280>.
- Jaron Maene and Luc De Raedt. Soft-unification in deep probabilistic logic. In *Proceedings of the 37th International Conference on Neural Information Processing Systems*, volume 36, pp. 60804–60820, 2023.
- Robin Manhaeve, Sebastijan Dumancic, Angelika Kimmig, Thomas Demeester, and Luc De Raedt. Deepproblog: neural probabilistic logic programming. In *Proceedings of the 32nd International Conference on Neural Information Processing Systems, NIPS’18*, pp. 3753–3763, 2018.
- Robin Manhaeve, Giuseppe Marra, and Luc De Raedt. Approximate Inference for Neural Probabilistic Logic Programming. In *Proceedings of the 18th International Conference on Principles of Knowledge Representation and Reasoning*, pp. 475–486, 2021.
- Lukas Murmann, Michael Gharbi, Miika Aittala, and Fredo Durand. A multi-illumination dataset of indoor object appearance. In *2019 IEEE International Conference on Computer Vision (ICCV)*, Oct 2019.
- Ivan Oseledets. Tensor-train decomposition. *SIAM J. Scientific Computing*, 33:2295–2317, 01 2011. doi: 10.1137/090752286.
- Joseph Redmon, Santosh Divvala, Ross Girshick, and Ali Farhadi. You only look once: Unified, real-time object detection. In *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 779–788, 2016. doi: 10.1109/CVPR.2016.91.
- Alaia Solko-Breslin, Seewon Choi, Ziyang Li, Neelay Velingker, Rajeev Alur, Mayur Naik, and Eric Wong. Data-efficient learning with neural programs. In *Advances in Neural Information Processing Systems*, volume 37, pp. 14666–14689, 2024.
- Emile van Krieken, Thiviyan Thanapalasingam, Jakub Tomczak, Frank van Harmelen, and Annette Ten Teije. A-nesi: A scalable approximate method for probabilistic neurosymbolic inference. In *Proceedings of the 37th International Conference on Neural Information Processing Systems*, volume 36, pp. 24586–24609, 2023.
- Po-Wei Wang, Priya L. Donti, Bryan Wilder, and Zico Kolter. Satnet: Bridging deep learning and logical reasoning using a differentiable satisfiability solver. In *International Conference on Machine Learning*, 2019.
- Ronald J. Williams. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine Learning*, 8(3–4):229–256, 1992. ISSN 0885-6125.
- Thomas Winters, Giuseppe Marra, Robin Manhaeve, and Luc De Raedt. Deepstochlog: Neural stochastic logic programming. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(9):10090–10100, 2022.
- Jingyi Xu, Zilu Zhang, Tal Friedman, Yitao Liang, and Guy Van den Broeck. A semantic loss function for deep learning with symbolic knowledge. In *Proceedings of the 35th International Conference on Machine Learning*, pp. 5502–5511, 2018.

A APPROXIMATION ERROR PROOF

Suppose that we want to sketch ϕ_i with TT-SVD, i.e., $(t_1^i, \dots, t_d^i) \leftarrow \text{SKETCH}(\phi_i)$, where the rank of the sketches is ρ . Let \mathcal{T}_i be the reconstruction of ϕ_i using the sketches.

Theorem 3.2 (CTSketch error bound). The error of the output distribution satisfies

$$\|\phi_i^{\text{OH}}p - \mathcal{T}_i^{\text{OH}}p\|_2 \leq \sqrt{2}\|p\|_F\|\phi_i - \mathcal{T}_i\|_F. \quad (\text{A.1})$$

Proof. With some rearranging and by definition of the L2 norm, we have

$$\|\phi_i^{\text{OH}}p - \mathcal{T}_i^{\text{OH}}p\|_2 = \|(\phi_i^{\text{OH}} - \mathcal{T}_i^{\text{OH}})p\|_2 \quad (\text{A.2})$$

$$= \sqrt{\sum_{\hat{y} \in Y} \langle (\phi_i^{\text{OH}} - \mathcal{T}_i^{\text{OH}})[:, \dots, :, \hat{y}], p \rangle_F^2}. \quad (\text{A.3})$$

Applying the Cauchy-Schwartz inequality to the inner product, we obtain

$$\leq \sqrt{\sum_{\hat{y} \in Y} \|(\phi_i^{\text{OH}} - \mathcal{T}_i^{\text{OH}})[:, \dots, :, \hat{y}]\|_F^2 \|p\|_F^2} \quad (\text{A.4})$$

$$= \|p\|_F \sqrt{\sum_{\hat{y} \in Y} \|(\phi_i^{\text{OH}} - \mathcal{T}_i^{\text{OH}})[:, \dots, :, \hat{y}]\|_F^2} \quad (\text{A.5})$$

$$= \|p\|_F \sqrt{\sum_{\hat{y} \in Y} \sum_{r_1, \dots, r_d} (\phi_i^{\text{OH}} - \mathcal{T}_i^{\text{OH}})[r_1, \dots, r_d, \hat{y}]^2}. \quad (\text{A.6})$$

Note that if $\phi_i[r_1, \dots, r_d] \neq \mathcal{T}_i[r_1, \dots, r_d]$, then the one-hot encodings $\phi_i^{\text{OH}}[r_1, \dots, r_d]$ differ in exactly two positions, which results in a squared difference of 2. Pulling this factor out, we obtain the desired result.

$$\leq \|p\|_F \sqrt{2 \sum_{r_1, \dots, r_d} (\phi_i - \mathcal{T}_i)[r_1, \dots, r_d]^2} \quad (\text{A.7})$$

$$= \sqrt{2} \|p\|_F \|\phi_i - \mathcal{T}_i\|_F \quad (\text{A.8})$$

□

B EXPERIMENT DETAILS AND COMPLETE RESULTS

B.1 EXPERIMENTAL SETUP AND HYPERPARAMETERS

In our experiments, we use the implementation of TT-SVD from the python package `tt-sketch` (Kressner et al., 2023). The hyperparameters used for CTSketch are summarized in Table 3. For the baseline methods Scallop, IndeCateR, ISED, A-NeSI, and DeepSoftLog we use:

Visual Sudoku. We use top-3 semiring for Scallop and learning rate 2e-4. We use $20 \times N \times N^2$ samples for IndeCateR, and learning rates 2e-4 and 5e-5 for 4x4 and 9x9 board, respectively. We use the same sample count for ISED and use learning rates 1e-3 and 5e-4. For A-NeSI, we copy the hyper-parameters used in their paper for this task.

MNIST Sum. For Scallop we again use top-3 proofs and 1e-4 learning rate. For IndeCateR and ISED, we use sample count of $100 \times n$. For IndeCateR we run for 300 epochs, using batch size 10 learning rates 1e-3 and 5e-4. We use learning rates 1e-4 and 5e-5 for ISED, and reduce the sample count to 6400 and 1024 for `sum64` and `sum256`. For DSL and A-NeSI, we copy the parameters used for MNIST-Add tasks in their papers. In case of DSL, We use the neural embeddings for `sum16` with learning rate 1e-3 and 1e-5 weight decay. For A-NeSI, we decrease the learning rate to 5e-4, 2e-4, and 1e-4 for $n = 64, 256, 1024$. We also reduce the embedding size from 800 to 400 for $n = 1024$ due to memory constraints.

Multi-digit Addition. For Scallop, we again use top-3 proofs and 1e-3 learning rate, and we use 30 epochs. For IndeCateR, we use a sample count of 10 and a 1e-3 learning rate. We train for 15

epochs, because this is when training saturates and accuracy starts to drop slightly. For ISED, we use a sample count of 100 and a $1e-4$ learning rate. We train for 10 epochs because this is when training saturates. For A-NeSI and DeepSoftLog, we use all of the same hyperparameters used in their evaluation that have been optimized for multi-digit addition.

Table 3: Hyperparameters used in CTSketch for the benchmark tasks

hyperparameter	visudo	sudoku	hwf	leaf	scene	sum _n	add _n
optimizer	Adam	AdamW	Adam	Adam	Adam	Adam	Adam
learning rate	1e-3 / 5e-4	5e-6	1e-4	1e-4	5e-4	1e-3 / 5e-4	1e-3
training epochs	1000 / 5000	10	150	100	50	100 / 150	100 / 300
batch size	20	256	16	16	16	16	64
sketching rank	full	2	8	full	full	2	full

B.2 TASK DECOMPOSITION

MNIST Sum. These tasks involve adding n digits, where n is some power of 2. As a result, we structure the decomposition as a tree with $\log_2(n)$ layers. Each ϕ_i takes two inputs, each being integers between 0 and $9 * 2^i + 1$, and the result is the sum of the two inputs. Therefore, the shape of ϕ_i is $(9 * 2^i + 1) \times (9 * 2^i + 1)$, and its entries are the sum of the indices. Concretely, $\phi_i[a, b] = a + b$.

Multi-digit Addition. These tasks involve adding two n -digit numbers. We structure the decomposition as a chain of adds and carries. ϕ_1 is the same as the first layer in MNIST sum, which just takes 2 digits as inputs, and the possible outputs are 0 – 18. For each place in the n -digit numbers, we add the two digits using ϕ_1 in the first layer. For each of the $n - 1$ layers after this, we define ϕ_i as the carry sum, taking two inputs: the result of the current place sum and the result of the previous place’s carry sum. The idea is that if the previous carry sum results in a 2-digit number, we carry over a 1 and the current place sum predictions get incremented by 1. This means each ϕ_i is a 19×20 tensor, with the first 10 column entries being equal to the row index, and the last 10 column entries being equal to one plus the row index.

Visual Sudoku. We decompose the task of determining whether the input is a valid sudoku board into pairwise comparisons of the cells. The cells in the same row, column, or block need to have distinct values, which leads to total of $n = 56$ and 810 comparisons for 4×4 and 9×9 sudoku boards, respectively. Hence, the program consists of a single layer with n instances of $\phi : N \times N$ such that $\phi[i, j] = i == j$, where $N \in \{4, 9\}$.

Sudoku Solving. For a single row, column, or block in a Sudoku board, if eight cells are filled with distinct values, the remaining one cell is uniquely defined as some value $v \in [1, 9]$. Using this idea, we decompose the Sudoku solving task into multiple instances of a program c that computes the value v given eight other values in the row, column, or block. We iterate through each cell, resulting in total of 3×81 instances. We allow the inputs to be 0, meaning that it is unfilled and could be any value $n \in [1, 9]$. Note that the program is no longer a one-to-one mapping between the inputs and the output. For instance, if the eight inputs are all zeros, the output can be any among 1 to 9. To encode one-to-many relationship we use $\phi^{\text{OH}} : 10 \times \dots \times 9$, such that $\phi(n1, \dots, n8, v - 1) = 1$ for all v satisfying the constraint. The case where $(n1, \dots, n8)$ contains redundant values is naturally ignored as $\phi(n1, \dots, n8)$ becomes an all-zero vector.

Handwritten Formula. The HWF architecture uses only one layer, but we initialize 4 different ϕ_i tensors corresponding to each possible formula length (1, 3, 5, and 7). Since there are 14 possible symbols (10 digits and 4 arithmetic operators), ϕ_i has the same number of dimensions as the corresponding formula length, and each dimension has size 14. Each entry represents the real-valued output of the evaluated formula, and invalid formulas correspond to an output of 0.

Leaf Identification and Scene Classification. For these tasks that use GPT-4, the model internals are unknown, so we do not decompose them and instead initialize just one tensor summarizing the program. For the leaf task there are 3 features (margin, texture, and shape) taking on 3, 3, and 6 possible values, respectively. The output values are one of the 11 possible leaf species. For the scene task, the object detector YOLOv8 returns at maximum 10 objects per image, where each can be one of the 45 classes. The output values are one of the 9 possible scenes.

B.3 FULL EXPERIMENTAL RESULTS

Table 4: Test accuracy on traditional neurosymbolic benchmarks.

(a) Test accuracy results for visudo and sudoku tasks.

Method	Accuracy (%)		
	visudo ₄	visudo ₉	sudoku
Scallop	84.92 ± 3.11	TO	TO
IndeCateR	87.20 ± 2.14	81.92 ± 2.11	66.50 ± 1.37
ISED	79.40 ± 3.36	50.0 ± 0.0	80.32 ± 1.79
A-NeSI	91.90 ± 1.90	92.11 ± 1.71	26.36 ± 12.68
CTSketch (Ours)	89.35 ± 2.45	92.50 ± 1.81	81.46 ± 0.53

(b) Test accuracy results for HWF, leaf, and scene tasks.

Method	Accuracy (%)		
	hwf	leaf	scene
Scallop	96.65 ± 0.13	N/A	N/A
IndeCateR	95.08 ± 0.41	69.16 ± 2.35	12.72 ± 2.51
ISED	97.34 ± 0.26	79.95 ± 5.71	68.59 ± 1.95
A-NeSI	3.13 ± 0.41	72.40 ± 12.24	61.46 ± 14.18
CTSketch (Ours)	95.22 ± 0.61	74.55 ± 5.42	69.78 ± 1.52