

Collaborative LLM Numerical Reasoning with Local Data Protection

Min Zhang^{1*}, Yuzhe Lu², Yun Zhou², Panpan Xu²,
Lin Lee Cheong², Chang-Tien Lu¹, Haozhu Wang^{2†}

¹Virginia Tech, ²AWS AI

Abstract

Numerical reasoning over documents, which demands both contextual understanding and logical inference, is challenging for low-capacity local models deployed on computation-constrained devices. Although such complex reasoning queries could be routed to powerful remote models like GPT-4, exposing local data raises significant data leakage concerns. Existing mitigation methods generate problem descriptions or examples for remote assistance. However, the inherent complexity of numerical reasoning hinders the local model from generating logically equivalent queries and accurately inferring answers with remote guidance. In this paper, we present a model collaboration framework with two key innovations: (1) a context-aware synthesis strategy that shifts the query domains while preserving logical consistency; and (2) a tool-based answer reconstruction approach that reuses the remote-generated problem-solving pattern with code snippets. Experimental results demonstrate that our method achieves better reasoning accuracy than solely using local models while providing stronger data protection than fully relying on remote models. Furthermore, our method improves accuracy by 16.2% - 43.6% while reducing data leakage by 2.3% - 44.6% compared to existing data protection approaches.

1 Introduction

Numerical reasoning over documents is a practical yet complex task that often requires powerful black-box models like GPT-4 for problem-solving (Akhtar et al., 2023). This task demands a deep understanding of documents, the ability to identify relationships from scattered evidence, and the capability to derive answers through quantitative calculations. In real-life scenarios, numerical reasoning is essential in tasks like analyzing financial reports (Chen et al., 2021; Zhao et al., 2022; Ma et al., 2025), research papers (Wu et al., 2025), medical documents (Mahendra et al., 2024), and contracts with numerical conditions (Huang et al.). Due to the demanding requirements for contextual understanding and logical reasoning, on-device or in-house small models often struggle to solve such problems effectively. Consequently, remote black-box models with strong problem-solving capabilities are frequently accessed via API calls to address these challenges.

However, the direct exposure of local data to remote models introduces significant risks of information leakage (Wang et al., 2024). Following prior studies (Zhou et al., 2023; Tong et al., 2023; Hartmann et al., 2024), we define local privacy information to pertain to every word, excluding non-sensitive stop words (Yue et al., 2021). Sensitive data can be presented explicitly or embedded implicitly within various contexts and formats, including company details, operational values, and strategic analyses, as illustrated in Fig. 1. While some works (Siyon et al., 2024; Chen et al., 2023c; Aahill, 2023) detect and remove explicit Personally Identifiable Information (PII), models like GPT-4 can infer personal attributes from residual context (Staab et al.). Similarly, the sentence “*our current policy is not to enter into transactions to hedge our fuel consumption...*” in Fig. 1 reveals confidential policy decisions

*Most work done in AWS AI during 2024 Summer.

†Currently working at Meta AI.

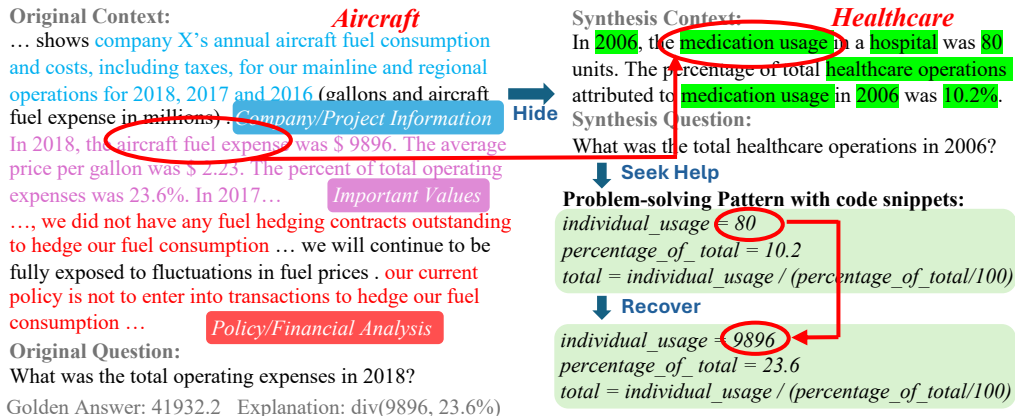


Figure 1: (Left) An original example from the FinQA dataset. We highlight the sensitive information hidden in the context. (Right) The synthesis context and question with a different topic (from Aircraft to Healthcare) while preserving logical consistency, and corresponding problem-solving pattern from remote LLM for local recovery.

without containing any explicit PII. Therefore, in this work, we aim to thoroughly protect the local text before the black-box model inference.

The inherent complexity of numerical reasoning over documents exacerbates the trade-off between data leakage and model utility. On one hand, local data must be concealed from the remote model to minimize information leakage. On the other hand, the remote model often requires detailed contextual information to have a deep understanding of the problem and to provide accurate help for effective reasoning. We identify two primary challenges in protecting local data for numerical reasoning over documents:

Difficulty in generating logically coherent synthesized queries. Existing methods often locally synthesize various queries for data protection, such as high-level descriptions (Zhang et al., 2024), analogous examples (Hartmann et al., 2024), dp-based permutation or paraphrased documents (Utpala et al., 2023). However, the complex logical reasoning within documents hampers the synthesis of accurate descriptions or logical-coherent contexts while keeping local data secret.

Local answer reconstruction with limited reasoning ability. Existing methods integrate local data and the remote model’s response to generate or recover answers. Although they are effective for semantic-focused tasks such as classification (Utpala et al., 2023), translation, or summarization (Tong et al., 2023; Zhang et al., 2024; Hartmann et al., 2024), their performance drops dramatically in reasoning tasks which demands both deep contextual understanding and complex logic. Even with accurate hints or examples, small models often struggle to reconstruct correct answers due to their limited reasoning abilities.

To address these challenges, we propose a novel model collaboration framework based on a simply yet powerful intuition: we can transform sensitive reasoning requests into a different domain while maintaining their underlying logical structure. By translating reasoning requests from one domain (e.g., aircraft) to another (e.g., healthcare) (Fig. 1), our approach ensures that the remote model operates on semantically altered but logically equivalent data, thereby mitigating the risk of sensitive information exposure. Benefiting from the logic-preserving synthesis data, we design a tool-based strategy that elicits reusable problem-solving patterns from the remote model, facilitating accurate answer reconstruction. Our main contributions are summarized as follows:

- We introduce a framework for collaborative numerical reasoning with black-box models, balancing local data protection and remote model utility without compromising local data. It seamlessly integrates with model cascade frameworks, leveraging remote models to compensate for local models’ limited reasoning ability.

- We design a generalizable data protection approach using a distilled synthesis model to generate topic-shifted yet logic-consistent queries to seek help. Further, we propose a tool-based answer reconstruction method that leverages reusable problem-solving patterns from the remote model. Through these components, we achieve a superior accuracy-privacy trade-off than existing collaborative inference methods with data protection measures, improving accuracy by 16.2% - 43.6% while reducing data leakage by 2.3% - 44.6%.

2 Background

Model cascade framework. Model cascade framework firstly resolves the problem by the local model, if the local response is not reliable, the local problem will be routed to the powerful remote model to resolve. The framework not only reduces the cost of API calls for remote model but also keeps some problems resolved locally which protects the local data from data leakage.

Given the context C and question q , we prompt the local LLM, denoted as $\mathcal{M}_{\mathcal{L}}$, to perform local inference. To improve robustness, the local model can conduct the inference n times:

$$r_i \sim \mathcal{M}_{\mathcal{L}}(C, q) \quad \text{for } i \in \{1, \dots, n\} \quad (1)$$

where r_i represents the solution of the local model at i -th time. Then we extract a set of candidate answers \mathcal{A} from responses $\{r_{1:n}\}$:

$$\mathcal{A} = \{a_1, a_2, \dots, a_n\} \quad (2)$$

The self-consistency is commonly used to find the final answer and estimate the uncertainty of the answer using voting score. Given the set of candidate answers \mathcal{A} , we define the consistency score as:

$$S = \max_{a \in \mathcal{A}} \frac{\sum_{i=1}^n \mathbb{I}(a_i = a)}{n} \quad (3)$$

where $\mathbb{I}(\cdot)$ is the indicator function that equals 1 if $a_i = a$ and 0 otherwise.

A referral module is then used to determine the reliability of the local answer. we use the voting score of the most common answer as the criterion to decide whether the question needs to be further solved by the remote model (Yue et al., 2024). If the consistency score S is lower than a predefined threshold τ , then the remote model $\mathcal{M}_{\mathcal{R}}$ is invoked to assist with reasoning and provide a more reliable answer. However, the direct exposure of local data (context C and query q) raises concerns about local data leakage. Observing this data leakage issue, previous work has proposed sharing problem descriptions and semantically similar examples with the remote model. While these methods work well in many cases, we found them ineffective for numerical reasoning tasks. Since the remote query is a fuzzy version of the local one, the returned solution is often not directly applicable or not sufficiently related for the local model to extrapolate, severely degrading the performance of model cascades.

3 Method

To maximize the utility of remote models while minimizing local data leakage in numerical reasoning tasks, we propose an effective collaboration protocol based on the observation that sensitive queries can be transformed into a different domain without their underlying mathematical structure altered. Our approach involves translating queries from one domain to another, ensuring that the remote model processes semantically transformed but logically equivalent data. This strategy mitigates the risk of exposing sensitive information while offering the local model a reusable solution. To achieve this, we introduce two key components of our protocol (as shown in Fig. 2), logic-preserving request synthesis and tool-based answer reconstruction, in the following subsections.

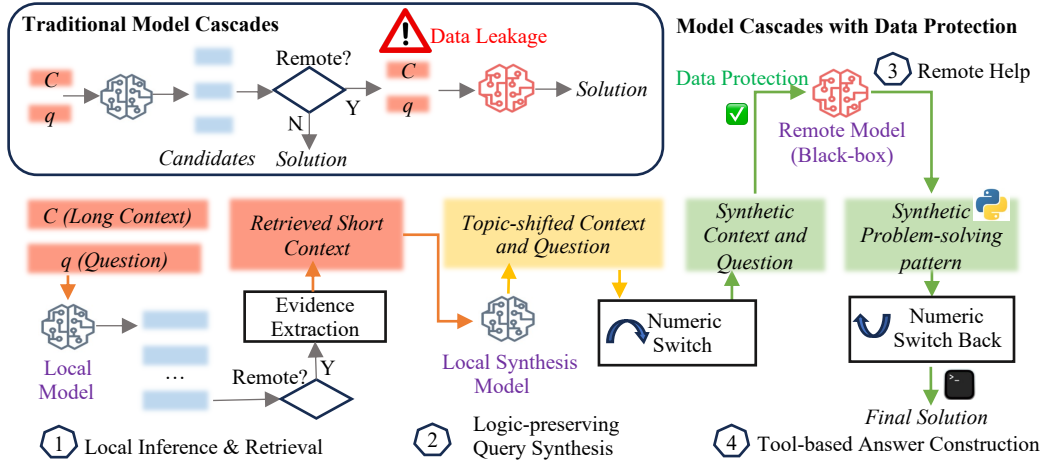


Figure 2: The workflow of the model cascades with local data protection. Unlike the traditional approach of exposing the raw original request to the remote model, our workflow ensures local data protection through logic-preserving request synthesis and tool-based answer reconstruction.

3.1 Logic-preserving request synthesis

In this section, we introduce the module leveraging specialized local models to synthesize requests with shifted topics but equivalent mathematical abstractions. Since hiding the local information and maintaining the underlying logic remains challenging for small local models, we fine-tune a dedicated request synthesis model and subsequently apply a numerical replacement strategy. By decoupling semantic protection and numerical protection, maintaining numerical values intact in the topic shifter not only facilitates logic verification but also paves the way for local answer reconstruction (as explained in the next section). Our data synthesis approach is detailed below.

Topic shifter. To protect the overall local information instead of detecting specific sensitive words, we instruct the synthesis model to shift the topic while maintaining the original logic and numerical values. By preserving numeric values, we establish a clear mapping between the original and synthesized objects (e.g., fuel expense \leftrightarrow medication usage in Fig. 1). The corresponding prompt and example are provided in Appendix A.8. We formally characterize the input and output of the proposed request synthesis model, denoted as \mathcal{M}_S , using the following equation:

$$\tilde{C}, \tilde{q} = \mathcal{M}_S(C, q) \quad (4)$$

where \tilde{C}, \tilde{q} represent the transformed context and query derived from the original inputs. For numerical reasoning over long documents, we note that $C = \{s_1, s_2, \dots, s_n\}$ is only a subset of the full document, where s_i are retrieved sentences relevant to the user query q . This shortened context is a natural choice as input to the synthesis model because the key sentences can be extracted alongside the local inference, and significantly simplifies the transformation compared to processing the entire document. The detailed design of the local retriever, along with prompts and examples, can be found in Appendix A.7.

To deploy an efficient local synthesizer, we distill the capabilities of a large remote model into a smaller local model. The remote model \mathcal{M}_R generates synthetic data for training. Through post-hoc analysis, we confirm its proficiency in instruction-following and generating logically equivalent requests under shifted topics. Particularly, we perform logic verification by comparing answers to the original and synthesized requests, as the numbers remain unchanged. In contrast, small local models often struggle to meet these requirements, especially in keeping numerical consistency and logical coherence. Via supervised fine-tuning, we enhance the local synthesizer’s rewriting and instruction-following capabilities.

Data switch. Since the topic shifter focuses on semantic protection, leaving the numerical values unchanged, we further obfuscate numerical values in the synthesized request to ensure complete anonymization. Using regular expressions, we extract all numbers $\mathcal{N} = \{n_1, n_2, \dots, n_k\}$ from the request and apply a transformation $h : n_i \mapsto \tilde{n}_i$. The final synthesized request with transformed numerical values, denoted as $(\tilde{C}_h, \tilde{q}_h)$, is then forwarded to the remote model for assistance within our framework. The data switch ensures numerical security, complementing the topic shifter’s for comprehensive data protection. Decoupling numerical protection during local data synthesis, we simplify subsequent local reconstruction. Serving as a bridge between the topic shifter and local reconstruction, the data switch ensures a seamless transition for accurate and secure data processing.

By fine-tuning the specialized local synthesizer \mathcal{M}_S , we ensure the synthetic request retains the original problem-solving logic while achieving a complete topic shift. Additionally, the numeric transformation step guarantees that shared values do not expose sensitive information. The transformation h is stored locally as a dictionary, and its role in enhancing local inference accuracy is further elaborated in the subsequent section.

3.2 Tool-based Local Answer Reconstruction

In addition to protecting local data, another key aspect of privacy-preserving collaborative inference is how to best leverage remote assistance. Due to privacy constraints, the solution from the remote model to a proxy request cannot be used directly. Naively, one could simply add the remote guidance to local model’s context to elicit a better response. However, we found that this strategy does not lead to satisfactory performance for the local model on numerical reasoning tasks owing to its limited capabilities. Thus, we propose a more structured scheme for the local model to generate its answers, which leads to dramatic performance improvements.

Since the synthesized request maintains the same logic as the original one, they share the same problem-solving pattern. To best preserve and communicate this pattern, we instruct the remote model to generate Python code (Chen et al., 2022) as a tool for the local model. During answer reconstruction, the local model will simply perform data substitution: since intermediate steps are represented using Python variables, substituting the input data is sufficient. The final answer is obtained by executing the code in an interpreter. We elaborate each of these steps below.

Remote assistance. After performing topic rewriting and numerical anonymization, we provide the synthesized context \tilde{C}_h and synthesized question \tilde{q}_h to the remote model \mathcal{M}_R :

$$F, f(m_1, m_2, \dots, m_t) = \mathcal{M}_R(\tilde{C}_h, \tilde{q}_h), \quad \text{where } m_i \in \{\tilde{n}_1, \tilde{n}_2, \dots, \tilde{n}_k\} \quad (5)$$

The remote model returns both the python function definition F , as well as its instantiation $f(\cdot)$ with transformed numeric inputs from the synthesized request.

Local reconstruction. Since the local model often fails to recognize the logical connection between the original and synthesized request and thus struggles to write Python codes for the local problem, we implement a much more structured approach to reuse the Python solution F from the remote model. Specifically, we compute the answer to the local problem by directly executing the following with Python interpreter:

$$f(h^{-1}(m_1), h^{-1}(m_2), \dots, h^{-1}(m_t)) \quad (6)$$

Recall that h is the mapping between original and transformed numeric values. Simply by swapping the input values, we can obtain the answer for the local problem thanks to the logical consistency between original and synthesized requests. With the collaboration scheme above, we maximize the remote model utility while relieving the reasoning model from reasoning burdens. Before we move on to showcase the superior performance of our method, we would like to emphasize the unique contribution of our approach. While our method might seem to be an instantiation of Program-of-Thought (PoT)(Chen et al., 2022), our focus is mainly on how to reuse the Python solution with quite different contexts and

accurately transfer to a logically equivalent problem instead of leveraging code to enhance reasoning. It’s important to note that PoT is merely a vehicle for our problem-solving pattern, and its success is deeply rooted in the logical consistency of queries as well as the decoupling of semantics and data protection within our approach.

4 Experiment settings

Datasets. We conducted experiments using two financial question-answering datasets: FinQA (Chen et al., 2021) and MultiHiertt (Zhao et al., 2022). Both datasets involve questions that require numerical reasoning based on provided documents. They contain both explicit and implicit sensitive information, including financial data analysis, project details, and decision-making content, making them well-suited for evaluating our local data protection approach. Further details on the datasets and data processing are provided in Appendix A.3.

Models. We employed two lightweight local models designed for resource-constrained environments. Specifically, we used Phi-3-mini-128k-instruct (3.8B params), and Llama-3.2-3B-Instruct. For collaborative reasoning, we used GPT-4o as the remote model.

Model distillation settings. For the synthesis model, we adopted a distillation setup where Llama-3.2-3B-Instruct served as the student model and GPT-4o as the teacher model. After applying a data quality filtering process (Appendix A.4), we retained 5,762 high-quality training samples from MultiHiertt’s training set. We only trained a single synthesis model and used it for different datasets and local models.

Evaluation metrics. Our evaluation comprises two key aspects: accuracy and local data leakage. Accuracy assesses whether the predicted answer matches the ground truth. For data leakage assessment, we follow prior studies (Zhou et al., 2023; Tong et al., 2023), which define local privacy information as pertaining to every word, excluding non-sensitive stop words (Yue et al., 2021). Similar to recent LLM-as-a-judge approaches (Hartmann et al., 2024; Siyan et al., 2024) for sensitive data leakage detection, we prompt the LLM to provide a binary judgment on whether the synthesized data contains original information. Specifically, we instruct a strong model to evaluate the presence of local information in remote model interactions. The evaluation prompt is as follows: *Given context A and context B, determine whether context B uses information from context A. Ignore table formats and sentence structures; If they share some similar important nouns, it can be considered that context B uses information from context A. Respond directly with Yes or No.* Here, context A denotes the original input, while context B represents the transmitted text during interactions with the remote model. We utilized GPT-4o-mini as the judge for data leakage evaluation. To validate the evaluation’s reliability, we conducted a manual review of 200 randomly selected leakage mapping results from the training set in both datasets. The agreement rate with human annotations was 96%, demonstrating a high alignment between the automated evaluation and human judgment.

Baselines. We compare our method with baselines involving local-only approaches, vanilla cascading without data protection, and model collaboration with different protection strategies. All methods utilize 3-shot prompting. We employ top- p sampling (Holtzman et al.) with $p = 0.9$ for local models and greedy sampling for the remote model.

Single Inference: A local approach using in-context learning with few-shot demonstrations (Brown et al., 2020) and Program-of-Thought (PoT) (Chen et al., 2022) for solution generation and execution. Results are averaged over seven runs.

Self-Consistency: To enhance local inference, we adopt self-consistency (Wang et al., 2022), selecting the answer with the highest voting consistency from seven executions.

Vanilla Model Cascading: Following (Yue et al., 2024), if local consistency falls below a threshold, the request is directly sent to a remote black-box model without data protection.

Hint: Following (Zhang et al., 2024; Hartmann et al., 2024), the local model generates a problem description, and the remote model provides a high-level hint. The hint is then integrated with local data for local inference.

Datasets		MultiHiertt		FinQA	
Metric		Acc(%)↑	Leakage(%)↓	Acc(%)↑	Leakage(%)↓
Local Model: Phi-3-mini-128k-instruct (3.8B)					
Local Methods	Single-inference	54.4	0	71.1	0
	Self-consistency	64.6	0	80.0	0
Collaboration Methods	Hint	42.7	6.0	63.9	28.8
	Example	57.0	16.1	71.4	38.9
	Ours	80.1	3.7	87.6	6.4
Local Model: Llama-3.2-3B-Instruct					
Local Methods	Single-inference	33.8	0	54.0	0
	Self-consistency	44.5	0	68.6	0
Collaboration Methods	Hint	27.0	20.9	55.3	50.5
	Example	31.1	18.8	55.5	20.0
	Ours	70.6	5.5	90.1	5.9

Table 1: Our method outperforms others by improving accuracy with less local data leakage. The accuracy score is normalized against that of the remote model with full local data.

Example: Similar to (Hartmann et al., 2024; Utpala et al., 2023), the local model rephrases the query or generates a new example to request remote assistance. The remote solution is used as an example from the teacher for local inference. To ensure data protection, we prompt the local model to alter the topic and conceal all sensitive information using the question and retrieved evidence, but without using a specialized synthesis model.

5 Results

In Section 5.1, we first show the accuracy-privacy trade-off without considering the referral module in model cascades to better illustrate how much remote model performance can be preserved after data protection procedures, as we send all requests to the remote model for collaborative methods. Following (Hartmann et al., 2024), we report normalized accuracy scores (actual accuracy divided by remote-only inference accuracy). Later in Section 5.2, we report the accuracy-privacy trade-off with an active referral module to reflect more realistic settings of model cascades. Finally, in Section 5.3, we provide a thorough ablation study to highlight the importance of the proposed modules in our framework.

5.1 Main results

Table 1 shows the accuracy and leakage results for various methods with different local models on two financial datasets. Compared to local inference methods, our method provides an alternative solution that trades minimal data leakage for substantial accuracy improvements. Compared to collaborative inference methods with other data protection strategies, our method presents a superior improvement in both accuracy and data protection.

Our method significantly improves local accuracy while approaching the upper accuracy bound of fully utilizing the remote LLM, with minimal data leakage. (1) *Improved local accuracy approaching remote accuracy.* Compared to single-inference and self-consistency approaches, our method achieves a notable accuracy boost. For instance, on MultiHiertt, Phi-3-mini-128k-instruct improves from 54.4% to 80.1%, and on FinQA, Llama-3.2-3B-Instruct increases from 54.0% to 90.1%, closely approaching remote model performance. Our method effectively leverages the remote model to compensate for the limited reasoning capabilities of the local model. (2) *Minimal data leakage.* In addition to substantial accuracy improvements, our method maintains low data leakage. On MultiHiertt, leakage is limited to 3.7% and 5.5% for Phi-3-mini-128k-instruct and Llama-3.2-3B-Instruct, respectively. On FinQA, leakage remains at 6.4% and 5.9%, reflecting a balanced trade-off between privacy and accuracy. These values are markedly lower compared to complete leakage in remote-only approaches.

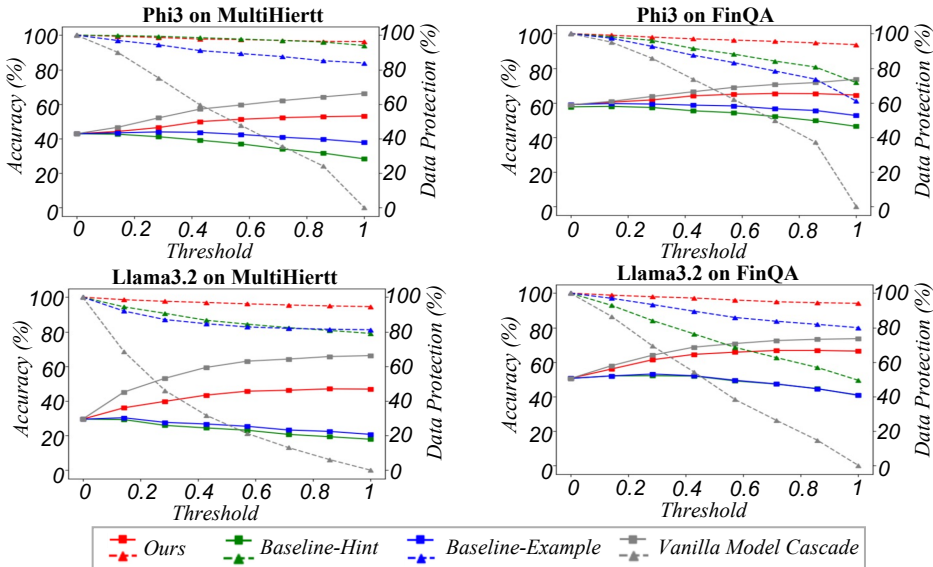


Figure 3: Model cascade with a decision maker. A higher threshold value results in more instances of seeking remote model collaboration. The solid lines represent accuracy, while the dashed lines indicate local data protection.

Our method achieves a new frontier than data protection baselines in both the accuracy and the data protection. (1) *Accuracy improvement.* Our method demonstrates a substantial performance improvement over existing approaches, with notable gaps observed across various datasets and models. Our method outperforms the Hint-based method by 23.7% - 43.6% in accuracy, and the Example-based method by 16.2% - 39.5%. Notably, the Hint and Example methods result in even lower accuracy than solely using the local model. This is because the unreliable, logic-incoherent query fails to trigger the remote large model for tailored assistance, and it does not effectively invoke the weaker local model’s reasoning capabilities. In contrast, our method generates logically consistent queries to elicit the remote model to produce problem-solving patterns, and it easily recovers answers through data replacement. (2) *Leakage reduction.* Our method achieves a significant reduction in data leakage compared to existing approaches. On the MultiHiertt dataset, leakage decreases by 2.3% - 15.4%. The reduction is even more pronounced on the FinQA dataset (14.1% - 44.6%). This is because the Hint method tends to leak contextual information when generating problem descriptions, and the Example method struggles to hide information effectively on its own. In contrast, our approach achieves effective information hiding and consistency maintenance by decoupling topic shifting and data replacement, along with distillation from the strong model. Examples of the synthesized query for different methods can be found in Appendix A.5.

Our local synthesis model and overall framework are general, maintaining both model-agnostic and dataset-agnostic properties. Finally, our method demonstrates strong generalization across different datasets and local retrievers. Specifically, the local synthesis model was only trained on the MultiHiertt dataset using context shortened by the local model Phi3. As shown in Table 1, our approach consistently achieves the highest accuracy and the lowest local data leakage rate, highlighting its effectiveness across unseen datasets (FinQA) and local models (Llama3.2-3B-Instruct).

5.2 Results with an active referral module

In practice, it is unnecessary to forward all local instances to the remote model, as the local model can handle certain simple instances. Building on previous work (Yue et al., 2024), we use the local model’s answer consistency rate to determine whether the remote model

	Distillation	Tool	Acc(%) \uparrow	Leakage(%) \downarrow
Ours	✓	✓	90.1	5.9
w/o Tool	✓	✗	65.0	5.9
w/o Distillation	✗	✓	42.2	15.1
w/o Distillation and Tool	✗	✗	65.7	15.1

Table 2: Ablation study conducted on the FinQA dataset with Llama3.2-3B-Instruct as both the local inference model and local hider model.

should be involved. If the consistency rate is below the threshold, the remote model is activated to assist in the decision-making process.

We present the accuracy and data protection rates under different thresholds. Fig. 3 illustrates the accuracy and local data protection of various model collaboration methods at different thresholds. The solid lines represent accuracy, while the dashed lines indicate local data protection, with the local data protection rate calculated as 1 minus the leakage rate. The upper-right corner represents a combination of high accuracy and high local data protection. Our results show that while the vanilla model cascade method achieves higher accuracy by directly exposing the full original context, it leads to significant local data leakage. In contrast, baseline privacy-preserving methods improve local data protection but at the cost of dramatically reduced accuracy. Our approach strikes a balance, achieving comparable accuracy while maintaining high local data protection.

5.3 Ablation study

To evaluate the effectiveness of the main components of our method, synthesizer distillation and answer reconstruction, we perform an ablation study and present the results in Table 2.

In the “w/o Tool” setting, we replace the tool-based answer construction with local inference using the same synthesized example and remote solution as before ablation. The request synthesis step remains unchanged, but the local model performs inference by combining the synthesized query, remote solution, and original query. This results in a significant accuracy drop, as the local model, with its limited reasoning capability, struggles to comprehend and replicate the example for effective reasoning despite receiving identical remote information.

In the “w/o Distillation” setting, we remove the distillation process and directly prompt the unmodified Llama3.2-3B-Instruct as the local synthesizer using the same data protection instructions. Other components, including tool-based answer reconstruction, remain unchanged. We observe a significant drop in accuracy, primarily because the local model alone fails to generate logically consistent queries and preserve the original numerical values. Firstly, this results in unreliable queries, preventing the remote model from producing a valid problem-solving pattern. Consequently, the tool-based answer reconstruction, which relies heavily on this pattern, fails to generate correct answers. Secondly, the unpreserved numbers in the context after topic rewriting cause the local model to switch back to the wrong numbers even if using the correct problem-solving pattern.

In the “w/o Distillation and Tool” setting, we remove both the tool-based answer reconstruction and distillation for the local synthesizer. The local model uses the same synthesized query as in the “w/o Distillation” setting, along with the synthesized example and solution from the remote model, to perform re-inference. Accuracy improves compared to “w/o Distillation” because, despite the incorrect number in the example, local inference relies more on the model’s understanding and reasoning of the original query. However, accuracy remains lower than our method, as incoherent examples and the limited reasoning ability of the local model hinder effective inference.

6 Conclusion

In this work, we propose a new framework for LLM numerical reasoning and protect the local data. To balance reasoning accuracy and data protection, we design a simple yet effective

approach integrating two key components: a context-aware synthesis strategy that ensures logical consistency while shifting query domains and a tool-based answer reconstruction approach that reuses remote-generated code snippets with local data. Our experimental results confirm the effectiveness of this approach, demonstrating substantial improvements in reasoning accuracy while mitigating data exposure. These findings pave the way for further advancements in privacy-preserving LLM collaboration systems, highlighting the potential for secure and efficient deployment in real-world applications.

References

- Aahill. What is azure ai language - azure ai services, July 2023. URL <https://learn.microsoft.com/en-us/azure/ai-services/language-service/overview>.
- Mubashara Akhtar, Abhilash Shankarampeta, Vivek Gupta, Arpit Patil, Oana Cocarascu, and Elena Simperl. Exploring the numerical reasoning capabilities of language models: A comprehensive analysis on tabular data. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Findings of the Association for Computational Linguistics: EMNLP 2023*, pp. 15391–15405, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-emnlp.1028. URL <https://aclanthology.org/2023.findings-emnlp.1028/>.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- Alycia N Carey, Karuna Bhaila, Kennedy Edemacu, and Xintao Wu. Dp-tabicl: In-context learning with differentially private tabular data. In *2024 IEEE International Conference on Big Data (BigData)*, pp. 1552–1557. IEEE Computer Society, 2024.
- Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, Jean-Baptiste Lespiau, Laurent Sifre, and John Jumper. Accelerating large language model decoding with speculative sampling. *arXiv preprint arXiv:2302.01318*, 2023a.
- Lingjiao Chen, Matei Zaharia, and James Zou. Frugalgpt: How to use large language models while reducing cost and improving performance. *arXiv preprint arXiv:2305.05176*, 2023b.
- Wenhu Chen, Xueguang Ma, Xinyi Wang, and William W Cohen. Program of thoughts prompting: Disentangling computation from reasoning for numerical reasoning tasks. *arXiv preprint arXiv:2211.12588*, 2022.
- Yu Chen, Tingxin Li, Huiming Liu, and Yang Yu. Hide and seek (has): A lightweight framework for prompt privacy protection. *arXiv preprint arXiv:2309.03057*, 2023c.
- Zhiyu Chen, Wenhu Chen, Charese Smiley, Sameena Shah, Iana Borova, Dylan Langdon, Reema Moussa, Matt Beane, Ting-Hao Huang, Bryan R Routledge, et al. Finqa: A dataset of numerical reasoning over financial data. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 3697–3711, 2021.
- Minxin Du, Xiang Yue, Sherman SM Chow, Tianhao Wang, Chenyu Huang, and Huan Sun. Dp-forward: Fine-tuning and inference on language models with differential privacy in forward pass. In *Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security*, pp. 2665–2679, 2023.
- Florian Hartmann, Duc-Hieu Tran, Peter Kairouz, Victor Cărbune, et al. Can llms get help from other llms without revealing private information? *arXiv preprint arXiv:2404.01041*, 2024.
- Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. The curious case of neural text degeneration. In *International Conference on Learning Representations*.

- Junyuan Hong, Jiachen T Wang, Chenhui Zhang, LI Zhangheng, Bo Li, and Zhangyang Wang. Dp-opt: Make large language model your privacy-preserving prompt engineer. In *The Twelfth International Conference on Learning Representations*.
- Jiani Huang, Ziyang Li, Ilias Fountalis, and Mayur Naik. Numerical reasoning over legal contracts via relational database. In *Workshop on Databases and AI*.
- Alexey Kurakin, Natalia Ponomareva, Umar Syed, Liam MacDermed, and Andreas Terzis. Harnessing large-language models to generate private synthetic text. *arXiv preprint arXiv:2306.01684*, 2023.
- Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast inference from transformers via speculative decoding. In *International Conference on Machine Learning*, pp. 19274–19286. PMLR, 2023.
- Tianmi Ma, Jiawei Du, Wenxin Huang, Wenjie Wang, Liang Xie, Xian Zhong, and Joey Tianyi Zhou. Llm knows geometry better than algebra: Numerical understanding of llm-based agents in a trading arena. *arXiv preprint arXiv:2502.17967*, 2025.
- Rahmad Mahendra, Damiano Spina, Lawrence Cavedon, and Karin Verspoor. Do numbers matter? types and prevalence of numbers in clinical texts. In Dina Demner-Fushman, Sophia Ananiadou, Makoto Miwa, Kirk Roberts, and Junichi Tsujii (eds.), *Proceedings of the 23rd Workshop on Biomedical Natural Language Processing*, pp. 409–415, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.bionlp-1.32. URL <https://aclanthology.org/2024.bionlp-1.32/>.
- Xupeng Miao, Gabriele Oliaro, Zhihao Zhang, Xinhao Cheng, Hongyi Jin, Tianqi Chen, and Zhihao Jia. Towards efficient generative large language model serving: A survey from algorithms to systems. *arXiv preprint arXiv:2312.15234*, 2023.
- Nicolas Papernot, Martín Abadi, Úlfar Erlingsson, Ian Goodfellow, and Kunal Talwar. Semi-supervised knowledge transfer for deep learning from private training data. In *International Conference on Learning Representations*, 2017.
- Li Siyan, Vethavikashini Chithra Raghuram, Omar Khattab, Julia Hirschberg, and Zhou Yu. Papillon: Privacy preservation from internet-based and local language model ensembles. *arXiv preprint arXiv:2410.17127*, 2024.
- Robin Staab, Mark Vero, Mislav Balunovic, and Martin Vechev. Beyond memorization: Violating privacy via inference with large language models. In *The Twelfth International Conference on Learning Representations*.
- Zhiliang Tian, Yingxiu Zhao, Ziyue Huang, Yu-Xiang Wang, Nevin L Zhang, and He He. Seqpate: Differentially private text generation via knowledge distillation. *Advances in Neural Information Processing Systems*, 35:11117–11130, 2022.
- Meng Tong, Kejiang Chen, Yuang Qi, Jie Zhang, Weiming Zhang, and Nenghai Yu. Inferdpt: Privacy-preserving inference for black-box large language model. *arXiv preprint arXiv:2310.12214*, 2023.
- Saiteja Utpala, Sara Hooker, and Pin-Yu Chen. Locally differentially private document generation using zero shot prompting. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pp. 8442–8457, 2023.
- Jeffrey G Wang, Jason Wang, Marvin Li, and Seth Neel. Pandora’s white-box: Increased training data leakage in open llms. *arXiv preprint arXiv:2402.17012*, 2024.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A Smith, Daniel Khashabi, and Hannaneh Hajishirzi. Self-instruct: Aligning language models with self-generated instructions. *arXiv preprint arXiv:2212.10560*, 2022.
- Junde Wu, Jiayuan Zhu, and Yuyuan Liu. Agentic reasoning: Reasoning llms with tools for the deep research. *arXiv preprint arXiv:2502.04644*, 2025.

- Chulin Xie, Zinan Lin, Arturs Backurs, Sivakanth Gopi, Da Yu, Huseyin Inan, Harsha Nori, Haotian Jiang, Huishuai Zhang, Yin Tat Lee, et al. Differentially private synthetic data via foundation model apis 2: text. In *Proceedings of the 41st International Conference on Machine Learning*, pp. 54531–54560, 2024.
- Da Yu, Peter Kairouz, Sewoong Oh, and Zheng Xu. Privacy-preserving instructions for aligning large language models. In *International Conference on Machine Learning*, pp. 57480–57506. PMLR, 2024.
- Murong Yue, Jie Zhao, Min Zhang, Liang Du, and Ziyu Yao. Large language model cascades with mixture of thought representations for cost-efficient reasoning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=6okaSfANzh>.
- Xiang Yue, Minxin Du, Tianhao Wang, Yaliang Li, Huan Sun, and Sherman SM Chow. Differential privacy for text analytics via natural text sanitization. *arXiv preprint arXiv:2106.01221*, 2021.
- Kaiyan Zhang, Jianyu Wang, Ermo Hua, Biqing Qi, Ning Ding, and Bowen Zhou. Cogenesis: A framework collaborating large and small language models for secure context-aware instruction following. *arXiv preprint arXiv:2403.03129*, 2024.
- Yilun Zhao, Yunxiang Li, Chenying Li, and Rui Zhang. MultihierTT: Numerical reasoning over multi hierarchical tabular and textual data. In *60th Annual Meeting of the Association for Computational Linguistics, ACL 2022*, pp. 6588–6600. Association for Computational Linguistics (ACL), 2022.
- Xin Zhou, Yi Lu, Ruotian Ma, Tao Gui, Yuran Wang, Yong Ding, Yibo Zhang, Qi Zhang, and Xuan-Jing Huang. Textobfuscator: Making pre-trained language model a privacy protector via obfuscating word representations. In *Findings of the Association for Computational Linguistics: ACL 2023*, pp. 5459–5473, 2023.

A Appendix

A.1 Related work

LLM collaboration Enabling effective collaboration between small LLMs and large LLMs is crucial to leveraging their respective advantages (Miao et al., 2023). Some studies explore collaboration during inference, such as speculative decoding, where a small model generates multiple candidate responses, which are then rapidly verified by a larger model to improve efficiency (Chen et al., 2023a; Leviathan et al., 2023). Additionally, other approaches focus on post-inference collaboration, such as model cascading, where uncertain cases of small LLMs are forwarded to a remote large model for resolution (Chen et al., 2023b; Yue et al., 2024). These collaborative methods assume full information and data sharing throughout the entire LLM collaboration process. However, for users with limited computational resources, remote LLMs are often accessed as a service, which raises concerns about potential information and data leakage. In this paper, we migrate the privacy leakage in LLM collaboration with integrating context-aware anonymization and a tool-based reconstruction mechanism, ensuring accurate solving and keeping the privacy.

Local data protection in LLM inference Protecting local data during LLM inference is critical. Some studies focus on PII replacement as a privacy-preserving strategy. For instance, Hong et al. replaces sensitive words in demonstration examples. Chen et al. (2023c) extracts entities and trains a hider model to generate random words as substitutes for entity obfuscation in summarization and classification. Siyan et al. (2024) prompts local LLM to conceal sensitive entities before querying a remote model. However, simple PII replacement is insufficient, as sensitive information often remains embedded in the context. Even after removing explicit PII mentions, models like GPT-4 can still infer personal attributes, such as locations, ages, and occupations, from contextual cues left in the text (Staab et al.). In our

work, we follow other prior works’ definition of privacy information (Yue et al., 2021; Tong et al., 2023) and treat all content, except for stop tokens, as information requiring protection.

There are existing works aiming to address the data protection issues for training data or for white models. (Papernot et al., 2017; Yue et al., 2021; Tian et al., 2022; Kurakin et al., 2023; Xie et al., 2024; Yu et al., 2024) focused on training data privacy protection. (Hong et al.; Carey et al., 2024) aim to protect the demonstration examples during inference time. (Du et al., 2023; Zhou et al., 2023) added noise to text embeddings for white-box models. They are not suitable for black-box remote model scenario, because they transmit text embeddings but the black-box model requires plain text.

Some other methods fully rewrite local information and queries. One common approach is adding noise to text embeddings using differential privacy (DP) techniques, which perturb the original representation or generate a new context while preserving semantic similarity (Tong et al., 2023; Xie et al., 2024). However, these methods only maintain semantic similarity and struggle to ensure logical consistency between the rewritten and original content. In contrast, our approach explicitly preserves logical consistency. Another line of fully rewriting explores prompting the local LLM directly to rewrite information and queries. For example, Utpala et al. (2023) prompts an LLM to paraphrase private documents for sentiment classification. Zhang et al. (2024) generates a high-level description of a user’s task and retrieves a structured writing sketch from a remote model. Similarly, Hartmann et al. (2024) prompts a local LLM to generate a mathematically analogous example. However, these approaches fail to yield satisfactory results in our task setting. This is due to the limited capabilities of local LLMs, which struggle to ensure high-quality rewriting and frequently introduce errors when generating responses based on the remote LLM’s output. To address this issue, we develop a task-agnostic rewriting module and introduce a mechanism that allows the local LLM to reuse the reasoning structure of the remote LLM when generating final responses.

A.2 Why is the DP-based method unsuitable for our task?

The Differential Privacy (DP)-based method (Tong et al., 2023; Xie et al., 2024) for black-box inference adds noise to generate similar words as replacements for the original words. However, the resulting text is often unreadable and lacks logical coherence. While this approach may perform well on tasks like classification and sentiment analysis that primarily rely on semantic understanding, it is unsuitable for reasoning tasks that require logical consistency. An example generated using InferDPT (Tong et al., 2023) is provided below.

Original text:

He ’s been waiting 19 years for a visa still stuck in a backlog...

DP-generated text:

female declared billing 142 Pour must Fantasy Even dear poon am...

A.3 Datasets details

We focused on numerical reasoning over documents for evaluation. The FinQA dataset consists of 1097 samples, while the MultiHierttQA dataset contains 749 samples. Due to the inconsistent answer formats in the FinQA dataset, such as the inclusion of special symbols and varying decimal places, we execute the given programs in the dataset and retain results with five decimal places.¹ We convert the table data in the context into textual descriptions using a unified format: “[row] of [column] is [value].”

A.4 Data filtering for model distillation

The MultiHiertt dataset contains a total of 6,360 training examples. Our data filtering process consists of three steps: leakage evaluation, conflict evidence detection, and answer

¹<https://huggingface.co/datasets/gagan3012/finqa-updated>

consistency verification. In step 1, we randomly select 300 synthesized examples for the leakage check and find that the error rate is 4%. In step 3, we manually verify answer consistency and determine that the results are satisfactory. Step 2 involves conflict evidence detection using a rule-based approach, which results in a 10% error rate. Based on this, we perform data filtering in step 2. Finally, we retain 5,762 examples out of the original 6,360.

A.5 Examples for data leakage

We show the synthesized query generated by different methods. The text highlighted in red means leaked data, while the text highlighted in blue means that the data has been protected.

Original query:

Context: ...Excluded from the \$33 billion of collateral is \$10 billion of collateral delivered by clients at the initiation of transactions; this collateral secures exposure that could arise in the derivatives portfolio should the MTM of the client's transactions move in the Firm's favor.

...Total of Notional amounts 2005 is \$43,593Total of Derivative receivables MTM 2005 is 50 .

Question: for the derivative contracts , assuming an average contract life of 10 years , what would annual exposure be in us billion at december 31 , 2005 on derivative receivables?

Hint-based method query:

This is a question about calculating the *annual exposure* of *derivative contracts* based on the *total notional* amount and the *average contract life*.

Example-based method query:

Context: ... Excluded from the \$42 billion of collateral is \$12 billion of collateral delivered by clients at the initiation of transactions; this collateral secures exposure that could arise in the derivatives portfolio should the MTM of the client's transactions move in the Firm's favor. ... Total of Notional amounts 2009 is \$57,193 . Total of Derivative payables MTM 2009 is 60 .

Question: for the *derivative contracts* , assuming an average contract life of 8 years , what would annual *exposure* be in us billion at december 31 , 2009 on *derivative payables*?

Our query

Context: ...Excluded from the 46 billion liters of water consumption is 16 billion liters of water reserved by clients at the initiation of usage; this reserved water ensures supply security in case the consumption rate aligns with expectations. ...Total of planned water usage 2013 is 35,712 billion liters. Total of Actual water consumption 2013 is 60 billion liters.

Question: for the *water usage*, assuming an average usage period of 10 years, what would annual *water consumption* be in billion liters at December 31, 2013 on actual *water consumption*?

A.6 Examples for logic inconsistency

Original query

Tier 1 capital of JPMorgan Chase Bank, N.A. Basel III Standardized Transitional Dec 31, 2017 is 184375 .

Total capital of JPMorgan Chase Bank, N.A. Basel III Standardized Transitional Dec 31, 2017 is 195839 .

Synthesis query with logic error

Total output of Global Manufacturing Division, N.A. Basel III Standardized Transitional Dec 31, 2017 is 184375.

Total output of Global Manufacturing Division, N.A. Basel III Standardized Transitional Dec 31, 2017 is 195839.

The synthesis query presents conflicted statements because of logical inconsistency in the rewriting.

A.7 Prompts and examples for local inference and retrieval

Through local inference with evidence retrieval, we prioritize solving problems locally whenever possible. For cases requiring remote resolution, we compress the long document to alleviate the burden of information hiding for lengthy texts.

Evidence localization. The long context makes the local model hard to understand the context and logic thus hinders the generation the generation of similar synthesized problems. So we first shorten the original context via local evidence localization to reduce the burden of synthesizing a similar problem.

We incorporate evidence localization into the local inference process in the traditional model cascade framework. In this way, the evidence localization will not introduce additional computation overhead. Specifically, we prompt the local model to explicitly display the original sentence from the context as the evidence for each reasoning step. For example, the first evidence for the example in Fig 1 is that “The aircraft fuel expense in 2018 is 9896.”

The local inference Equation (7) will become:

$$E_i, r_i \sim \mathcal{M}_{\mathcal{L}}(C, q) \quad \text{for } i \in \{1, \dots, n\} \quad (7)$$

where E_i represents all retrieved sentences at i -th time.

$$E_i = \{s_{i1}, s_{i2}, \dots, s_{ij}\} \quad (8)$$

We find that the local model sometimes changes the original sentence in the evidence generation because of its hallucination, we just need the model output the sentence id and then use the sentence id to retrieve the original sentences. Table 3 shows our prompt and an example of the local inference with evidence localization. Sometimes, the sentence ids may be wrong, so we further use regular expressions to match original sentences containing numerical values in the response as the retrieval results. We remove duplicate retrieved sentences and concat them as the retrieved context. The original long context is shorted as the retrieved context $\mathcal{E} = \cup_i E_i$.

We show the prompt with a golden example as an in-context learning demonstration for local inference and retrieval in Table 3.

A.8 Prompts and examples for topic rewriter

We show the prompt with a golden example as an in-context learning demonstration for the topic shifter in Table 4.

A.9 Why do model collaboration with Hint and Example get worse?

Our method successfully corrected the cases that the local model initially got wrong, whereas other methods were unable to achieve this. Fig. 4 shows enhancements and deteriorations compared to local self-consistency for the Phi3-mini model on the MultiHiertt dataset. Enhancement refers to cases where local self-consistency was incorrect, but the new method is correct. Deterioration refers to cases where local self-consistency was correct, but the new method is incorrect. We can observe that the baseline Hint and Example methods caused many questions that could be correctly answered by the local model alone to be answered incorrectly in the collaboration. In contrast, our method successfully addressed a large number of questions that the local model could not solve, thereby improving accuracy.

This is because the unreliable, logic-incoherent query fails to trigger the remote large model for tailored assistance, and it does not effectively invoke the weaker local model’s reasoning capabilities. In contrast, our method generates logically consistent queries to elicit the remote model to produce problem-solving patterns, and it easily recovers answers through data replacement.

Prompt

You are a helpful assistant. Given the context and the problem, you need to write Python code to solve the problem. Your solution should follow task instructions.

Task instruction:

Each sentence in the context is numbered starting with [Sentence id]. Your task is to read the given context and write Python code with accompanying comments to solve the question. The Python solution must be enclosed within a code block that starts with the tag `python` and ends with the tag `'''`.

Requirements:

1, Break the question down into as many detailed steps as possible.

1, In your code comments, specify the type of each step, describe the subtask, and reference the relevant sentence number from the context or provide logical reasons.

2, Step Type: Indicate whether the step is a [retrieval step] or a [logical step].

3, Retrieval Steps: Indicate all the related sentence number for retrieval with format [Sentence id], [Sentence id].

4, If the retrieved object involves comparison across several candidate sentences, you must NOT directly output the final answer to the retrieval. You need to make sure to list all relevant sentences before outputting the final retrieved objects.

5, Logical Steps: Provide the reason or logic behind the decision or action in the code.

6, Precision: Retain the full precision of the final result without rounding or truncating decimals.

7, Naming Conventions: Python variable names must not start with a number.

Example Input

Context:

[Sentence 0]: income was due primarily to the adoption of Statement of Position ...

[Sentence 11]: Equity securities of For the years ended December 31, 2015 is 17 .

...

Question: What is the growing rate of Mortgage loans in the year with the most Equity securities?

Example Output

```
```python
Step 1, [retrieval step] Retrieve all the related amounts of Equity securities
evidence from the original context: [Sentence 7], [Sentence 9], [Sentence 11]
equity_securities_2017 = 24
equity_securities_2016 = 22
equity_securities_2015 = 17

Step 2, [logical step] Determine which year has the most Equity securities amount
year_most_equity = 2017

Step 3: [retrieval step] Retrieve the mortgage loans amount for the identified year
2017 and its previous year 2016.
evidence from the original context: [Sentence 13], [Sentence 15]
mortgage_loans_2017 = 124
mortgage_loans_2016 = 116

Step 4: [logical step] Calculate the growth rate of mortgage loans in the year 2017.
Growth Rate = (Current Year Amount - Previous Year Amount) / Previous Year Amount
growth_rate = (mortgage_loans_2017 - mortgage_loans_2016) / mortgage_loans_2016
```
```

Table 3: The prompt and an example for local inference and retrieval.

Prompt

You are a helpful assistant. Rewrite the context and the question according to the following task instruction and requirements.

Task instruction:

Given the context and question, replace the entities and important nouns in a different topic while keeping the numerical values unchanged.

Requirements:

1. Change the topic of the context. For example, if the current topic is the water consumption, change it to other topics such as the automobile factory or the medicine.
 2. Replace important nouns, e.g. securities, issuance, equity compensation plans with general or new-topic-related nouns.
 3. Maintain the numerical values unchanged.
 4. Maintain the format and logic unchanged.
 5. Ensure that every sentence is rewritten. Do not omit or hide any of them. The number of sentences in the output should match the number provided by the user, without omitting anyone.
 6. Directly output the rewritten context and question within the tag `<rewritten>` and `</rewritten>`. Don't include unrelated information in within the tags.
-

Example Input

Context:

[Sentence 2]: Total benefits, claims and expenses increased \$3.9 billion ... and due to increases in the Retail Products segment associated with the growth in the individual annuity and institutional investments businesses.

[Sentence 7]: Equity securities of For the years ended December 31, 2017 is 24 .

[Sentence 9]: Equity securities of For the years ended December 31, 2016 is 22 .

[Sentence 13]: Mortgage loans of For the years ended December 31, 2017 is 124 .

[Sentence 15]: Mortgage loans of For the years ended December 31, 2016 is 116 .

...

Question: What is the growing rate of Mortgage loans in the year with the most Equity securities?

Example Output

`<rewritten>`

Context:

[Sentence 2]: Total expenditures, system failures, and maintenance costs increased by 3.9 billion ... and due to operational expansions in the Electric Vehicle Division to support growing demand in both rural and urban transportation markets.

[Sentence 7]: Robot units of For the years ended December 31, 2017 is 24 units.

[Sentence 9]: Robot units of For the years ended December 31, 2016 is 22 units.

[Sentence 13]: Vehicle units of For the years ended December 31, 2017 is 124 units.

[Sentence 15]: Vehicle units of For the years ended December 31, 2016 is 116 units.

...

Question: What is the growth rate of Vehicle units in the year with the most Robot units?

`</rewritten>`

Table 4: The prompt and an example for the topic rewriter. The original version is mainly about financial and investment context involving retail, mortgage loans. The rewritten version shifts the topic to a technological and industry-specific context involving robotics and vehicles.

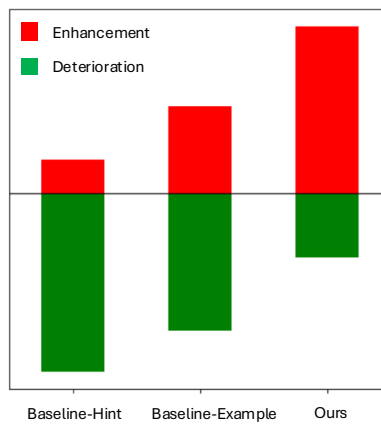


Figure 4: Enhancements and deteriorations compared to local self-consistency for the Phi3-mini model on the MultiHiertt dataset. Enhancement refers to cases where local self-consistency was incorrect, but the new method is correct. Deterioration refers to cases where local self-consistency was correct, but the new method is incorrect.