

FastER: Fast On-Demand Entity Resolution in Property Graphs

Shujing Wang¹, Selasi Kwashie², Michael Bewong³, Junwei Hu¹, Vincent M. Nofong⁴, Shiqi Miao¹, and Zaiwen Feng^{1*}

¹ Huazhong Agricultural University, Wuhan, China

wsj2022@webmail.hzau.edu.cn, junweihu@webmail.hzau.edu.cn,
ShiqiM@webmail.hzau.edu.cn, zaiwen.feng@webmail.hzau.edu.cn

² AI & Cyber Futures Institute, Charles Sturt University, Australia
skwashie@csu.edu.au

³ School of Computing, Mathematics and Engineering, Charles Sturt University,
Australia

mbewong@csu.edu.au

⁴ Department of Computer Science and Engineering, University of Mines and
Technology, Ghana

vnofong@umat.edu.gh

Abstract. Entity resolution (ER) is the problem of identifying and linking database records that refer to the same real-world entity. Traditional ER methods use batch processing, which becomes impractical with growing data volumes due to high computational costs and lack of real-time capabilities. In many applications, users need to resolve entities for only a small portion of their data, making full data processing unnecessary—a scenario known as “ER-on-demand”. This paper proposes FastER, an efficient ER-on-demand framework for property graphs. Our approach uses *graph differential dependencies* (GDDs) as a knowledge encoding language to design effective filtering mechanisms that leverage both structural and attribute semantics of graphs. We construct a blocking graph from filtered subgraphs to reduce the number of candidate entity pairs requiring comparison. Additionally, FastER incorporates Progressive Profile Scheduling (PPS), allowing the system to incrementally produce results throughout the resolution process. Extensive evaluations on multiple benchmark datasets demonstrate that FastER significantly outperforms state-of-the-art ER methods in computational efficiency and real-time processing for on-demand tasks while ensuring reliability. We make FastER publicly available at the Github link here.

Keywords: Entity Resolution · On-Demand · Progressive · Graph Differential Dependencies (GDDs) · Property Graphs

1 Introduction

Entity Resolution (ER) is the problem of determining when different data records represent the same real-world entity. While critical in domains like finance,

* Corresponding author: zaiwen.feng@webmail.hzau.edu.cn

healthcare, and social networks, ER faces significant computational challenges in big data. Indeed, its quadratic time complexity means every possible entity pair must be compared in the worst case. Traditional solutions like blocking [1, 2, 5, 6] and nearest-neighbor [4, 7, 8] techniques reduce comparisons by filtering unlikely matches [3]. However, these methods often struggle with graph data, where entity relationships provide crucial context for identification. For example, in social networks and knowledge graphs, understanding connections among entities is essential for accurate duplicate detection. Moreover, conventional ER approaches may not meet the performance requirements of real-time applications where immediate results are needed. This paper studies the on-demand ER problem in property graphs, illustrated in Example 1 below.

Example 1 (On-Demand ER Scenario). Consider a video streaming platform as a property graph: users, devices, and videos represented as nodes with multiple features; and complex relationships exist among nodes. Fig. 1 shows the ER context with six (6) key requirements. First, traditional batch ER methods are inefficient in this context as they require complete dataset processing before returning results, creating unacceptable delays for time-sensitive operations and failure to prioritize relevant entities. That is, they fail on requirements 1, 2, 4 and 5. Second, progressive ER solutions are incapable of tackling the intricacies of property graphs (Requirement 1), and the prioritization of application-relevant subsets of the data (Requirement 4). Finally, to our knowledge, the only two existing on-demand ER solution in the literature [10, 14] are designed for relational data, thus, ill-equipped to handle Requirement 1. We present an on-demand ER framework for property graphs, FastER, that meets all six (6) requirements. \square

Contributions. We present a graph differential dependencies (GDDs) [20] based framework for on-demand entity resolution in property graphs. Our approach dynamically processes relevant subgraphs and progressively emits cleaned entities, enabling direct querying of dirty property graphs. More formally, the contributions of the paper are summarised as follows. 1) We leverage GDDs to encode users’ application-relevant domain knowledge, enabling relevance

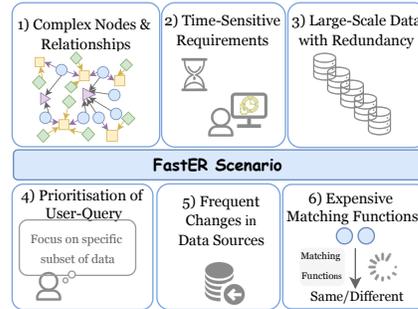


Fig. 1: On-Demand ER in Property Graphs

filtering that utilize both structural relationships and attribute semantics. 2) Further, we propose an efficient and effective blocking solution for ER-on-demand tasks that reduces computational overhead while maintaining recall. Our approach extends traditional rule-based filtering with a targeted blocking and progressive scheduling scheme, representing the first adaptation of on-demand ER to graph data. 3) We conduct extensive experiments on benchmark graphs and relational datasets. The empirical results show that our method achieves significant efficiency, offering superior real-time processing capabilities and reliability

compared to existing solutions in ER-on-demand tasks.

Related Work. Works related to this paper fall under three groupings below. Graph Constraints. In recent years, graph constraints have emerged as a prominent research area due to their relevance in data quality management. For instance, graph keys (GKeys) [21] leverage graph isomorphism properties to uniquely identify entities within a graph. Graph functional dependencies (GFDs) [22] apply attribute-value dependencies (similar to CFDs [23]) to the topological structures of graphs, while Graph entity dependencies (GEDs) [24] further integrate the semantics of both GFDs and GKeys. In this study, we adopt graph differential dependencies (GDDs) [20], an extension of GEDs. GDDs introduce similarity and matching semantics into the existing structure, making them suitable for defining declarative matching rules. This characteristic allows GDDs to better capture approximate matching relationships in graphs, thereby improving the accuracy and robustness of entity resolution.

Progressive ER. Madhavan et al. [15] were among the first to implement a progressive data integration system in Google Base, demonstrating how web data can be integrated progressively under time and resource constraints. Since then, progressive methods have been widely applied to schema mapping [16–19] and entity resolution [9, 11], especially in scenarios with limited computational capacity or time for debugging. Existing progressive ER methods employ blocking and scheduling strategies to prioritize high-probability matches for faster discovery [9, 11]. However, this approach has two key limitations. First, since result emission is not performed at the entity level, matching remains incomplete, potentially leading to incorrect intermediate results that fail to meet user requirements. Second, it lacks support for graph data structures, e.g., entity profiles generated from partial cluster matches may result in inaccurate outcomes.

On-Demand ER. The most related works to this paper are in [10, 14]. Query-Driven Approach (QDA) [14] streamlines data cleaning by analyzing selection predicates within a block to reduce comparisons. However, its lack of progressive execution capability makes it unsuitable for real-time applications. On the other hand, BrewER [10] incrementally cleans data during SQL SP query evaluation using prioritized attribute comparisons. While similar to our approach, it has three key limitations: it requires computationally expensive Cartesian products to generate candidates, demands whole-dataset blocking preparation, and lacks support for graph relationships.

2 Preliminaries

2.1 Basic Definitions and Notions

The definitions of *property graphs*, *graph patterns*, and *matches* follow [24].

A **property graph** is a directed graph $G = (V, E, L, FA)$, where V is a set of nodes, $E \subseteq V \times L \times V$ is a set of labeled edges, and each node $v \in V$ has a unique ID, label $L(v)$, and attributes $FA(v) = [(A_1, c_1), \dots, (A_n, c_n)]$, where A_i are distinct attributes and c_i their values.

A **graph pattern** $Q[\bar{z}] = (V_Q, E_Q, L_Q)$ describes node structures and relationships: V_Q is the set of pattern nodes, E_Q the set of edges, and L_Q a labeling function that assigns labels, including the wildcard $*$, which denotes unrestricted labels. Two labels l_1 and l_2 match ($l_1 \simeq l_2$) if $l_1 = l_2$ or either is a wildcard.

A **match** of a graph pattern $Q[\bar{z}]$ in a graph G is a homomorphism, h , mapping Q onto the graph G , preserving labels and structure.

An **entity profile** for a real-world entity is a tuple $p = \langle pid, eid, type, P, R \rangle$, where pid is a unique profile identifier, eid is the (possibly unknown) real-world entity ID, and $type$ denotes its category (e.g., *person*, *location*). P is a set of attribute-value pairs (A, c) , and R a list of relations $(rela, pid')$ linking the entity to other profiles. If two profiles, p_1, p_2 , represent the same entity, then $p_1.eid = p_2.eid$.

Example 2 (Property graph, graph patterns, and matches). Fig. 2 illustrates: a) a property graph, b) two graph patterns $Q_1[x, x', y]$ and $Q_2[x, x', y]$, and c) the matches of Q_1 in G in a pseudo-table. As an example, the pattern Q_1 represents two **user** nodes connected to the same **platform** via a **watched** relationship. Matches in G are shown in Fig. 2 c).

2.2 Graph Differential Dependency (GDD)

We present the syntax and semantics of **graph differential dependency** [20]. A GDD φ is a pair $(Q[\bar{u}], \Phi_X \rightarrow \Phi_Y)$, where $Q[\bar{u}]$ is a graph pattern, and Φ_X, Φ_Y are sets of distance constraints on pattern variables \bar{u} . GDD captures dependencies among graph entities based on similarity or matching conditions. The distance constraints are given as:

$$\begin{aligned} \delta_A(x.A, c) \leq t_A; \quad \delta_{A_1 A_2}(x.A_1, x'.A_2) \leq t_{A_1 A_2}; \quad \delta_{eid}(x.eid, c_e) = 0; \\ \delta_{eid}(x.eid, x'.eid) = 0; \quad \delta_{\equiv}(x.rela, c_r) = 0; \quad \delta_{\equiv}(x.rela, x'.rela) = 0, \end{aligned}$$

where $x, x' \in \bar{u}$ are pattern variables, A_i are attributes, and c is a constant. $\delta_{A_1 A_2}$ depends on attribute types (e.g., arithmetic operations for numerical values, edit distance for strings). In GDD, Φ_X specifies constraints that must hold for Φ_Y to be satisfied. We use GDDs to encode user-specified and application-relevant constraints. We illustrate GDD semantics with a toy example below.

Example 3 (GDD Semantics). Consider $\varphi : (Q_1[x, x', y], \Phi_X \rightarrow \Phi_Y)$, where $\Phi_X = \{\delta_{Age}(x, x') \leq 3 \wedge \delta_{Ph}(x, x') = 0\}$ and $\Phi_Y = \{\delta_{eid}(x, x') = 0\}$. This states that if two **users** in Q_1 have an **Age** difference within 3 and identical **Phone** numbers, they refer to the same real-world entity. \square

2.3 Problem Definition

Given a property graph, G , and a set Σ of user-specified GDDs, we seek to identify and link all Σ -relevant node pairs $v_i, v_j \in G$, that refer to the same

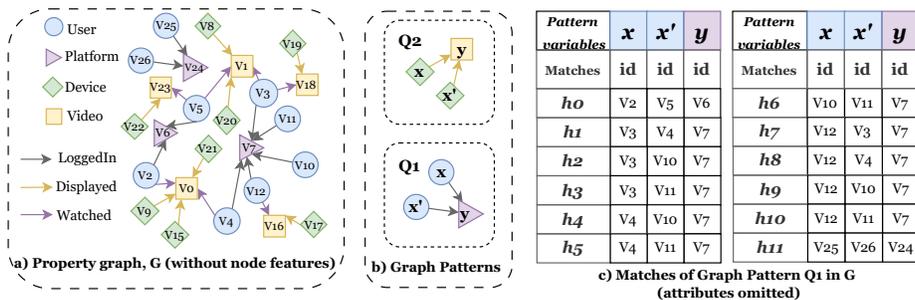


Fig. 2: Toy Example: a) Property graph G ; b) Graph patterns Q_1, Q_2 ; c) Matches of Q_1 in G

real-world entity. A node pair $v_i, v_j \in G$ is said to be Σ -relevant iff: $v_i, v_j \in H(Q, G) \in G$, where $H(Q, G)$ is the list of matches of a pattern Q in Σ .

The user-defined GDD specification is outside the scope of our study, but existing GDD mining algorithms [20, 25] can be used. We present empirical results in Section 4.5 to guide rule selection.

3 The FastER Framework for Property Graphs

In this section, we introduce FastER, a framework designed for candidate filtering and match scheduling, allowing the integration of any matching function of your choice. A brief pseudo-code is presented in Algorithm 1.

The FastER algorithm consists of three stages: graph pattern filtering, constraint-based filtering, and blocking graph construction and Progressive Profile Scheduling(PPS). In Stage 1, it identifies candidate subgraphs \mathcal{H}_1 that match the graph pattern $Q[\bar{z}]$ (line 1). In Stage 2, it refines these candidates by applying the user-defined constraints δ , forming the set \mathcal{H}_2 (line 2). Finally, Stage 3 constructs a blocking graph from pairs in \mathcal{H}_2 , computes edge weights based on rules satisfaction (lines 3-6), and sorts nodes to form a SortedProfileList (line 7). It iteratively processes nodes against candidate pairs, performing comparisons if their edge weight meets the specified threshold (lines 8-11), otherwise pruning the pair (line 16), the aggregated values at the entity level are validated to ensure they meet the user's demand (line 13). The algorithm returns the final matched results (line 17).

3.1 Graph Pattern Filtering

In the first stage of graph pattern filtering, we use graph patterns of the GDDs as query inputs over the dirty property graph to extract subgraphs that satisfy the structural constraints. These graph patterns are designed to capture potential entity relationships based on the properties of nodes and the relationships between them. For example, considering the property graph shown in Fig. 3 b), let us assume that we use the graph pattern defined in $Q[z; C] =$

Algorithm 1: FastER($G, Q[\bar{z}], \delta, \text{threshold}$)

```

Data: Property graph  $G$ 
Input: Graph pattern  $Q[\bar{z}]$ , distance constraints  $\delta$ , edge weight threshold
Result: Matched results
/* Stage 1: Graph pattern filtering */
1  $\mathcal{H}_1 \leftarrow \{\text{subgraphs} \mid \text{subgraphs satisfy } Q[\bar{z}]\}$ 
/* Stage 2: Constraint-based filtering */
2  $\mathcal{H}_2 \leftarrow \{s \in \mathcal{H}_1 \mid s \text{ satisfies constraints } \delta\}$ 
/* Stage 3: Blocking graph construction and PPS */
3 foreach  $(x, x') \in \mathcal{H}_2$  do
4    $\text{edgeWeight} \leftarrow \sum_{r \in \mathcal{R}}$  if  $x, x'$  satisfy  $r$ 
5   if  $\text{edgeWeight} > 0$  then
6     | Add edge  $(x, x')$  with  $\text{edgeWeight}$  to BlockingGraph
7 SortedProfileList  $\leftarrow \text{sortByEdgeWeights}(\text{BlockingGraph})$ 
8 foreach  $v \in \text{SortedProfileList}$  do
9   CompareList  $\leftarrow \text{getCandidates}(v)$ 
10  foreach  $\text{candidate} \in \text{CompareList}$  do
11    if  $\text{edgeWeight}(v, \text{candidate}) \geq \text{threshold}$  then
12      |  $\text{Compare}(v, \text{candidate})$ ,  $\text{updateMatchLists}(v, \text{candidate})$ 
13      if  $\text{meetsUserRequirements}(v, \text{candidate})$  then
14        |  $\text{addToResultSet}(v, \text{candidate})$ 
15      else
16        |  $\text{prune}(v, \text{candidate})$ ; // Skip if edge weight is too low
17 return Final matched results

```

(V_Q, E_Q, L_Q) . The pattern specifies any two user nodes, x and x' , connected to the same platform node y via watch edges. Distance constraints can be defined over this pattern. For example, nodes must satisfy certain attribute requirements, such as the user's age being greater than 18, which, under the definition of an on-demand query, ensures that only matches meeting specific user requirements are selected. Based on this structure, we first extract a set of subgraph candidates from the original graph that satisfy this structural requirement. The set of matched subgraphs can be represented as: $H_1(x, x', y) = \{(v_2, v_5, v_6), (v_3, v_4, v_7), (v_3, v_{10}, v_7), (v_3, v_{11}, v_7), (v_4, v_{10}, v_7), (v_4, v_{11}, v_7), (v_{10}, v_{11}, v_7), (v_{12}, v_3, v_7), (v_{12}, v_4, v_7), (v_{12}, v_{10}, v_7), (v_{12}, v_{11}, v_7)\}$.

Compared to Fig. 2, one fewer subgraph is present due to not satisfying the user's demand (i.e., on-demand). These subgraphs, consisting of nodes and edges, satisfy the structure of user-platform relationships through "logged-in" edges, and the user-specified demand, forming the candidate subgraphs for further filtering in the next step.

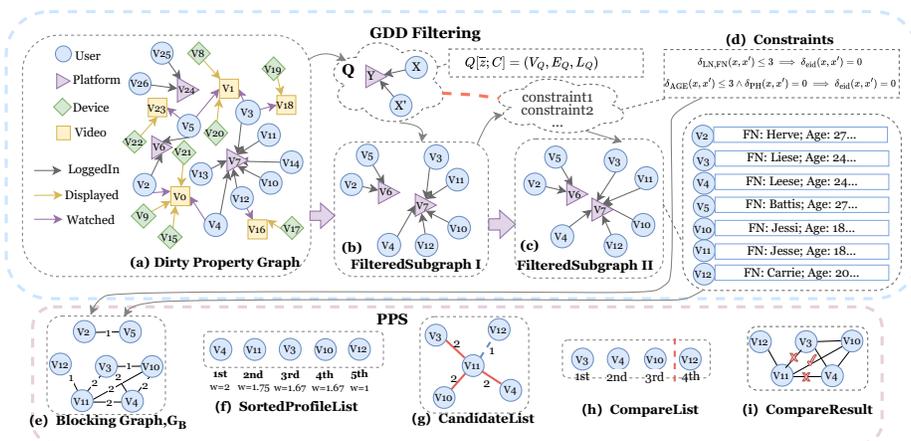


Fig. 3: The overall architecture of FastER. (a) The dirty property graph to be cleaned, (b) Subgraph obtained after graph pattern filtering, (c) Subgraph further refined by constraint-based filtering, (d) Constraints in GDD, (e) Blocking graph generated based on candidate matches and constraints, (f) The sorted profile list, (g) The neighborhood of node V11 within the same block, (h) The comparison list after processing V11 during the emission phase, (i) Comparison results of V11’s related candidates.

3.2 Constraints-Based Filtering

Here, we apply a predefined set of distance constraints to further filter matches of the subgraphs from the first stage. These constraints, based on domain knowledge, are designed to ensure that candidate node pairs exhibit sufficient similarity, thereby retaining only the most promising matching candidates. For example, the distance constraints may require that the last names or phone numbers of two nodes be similar for them to be considered potential matches.

We define several distance constraints, which require that the differences between node pairs on certain attributes must fall within specific thresholds, such as last names, phone numbers, and ages. In this example, we define four constraints: - Lastname (LN) edit distance: $\delta_{LN}(x, x') \leq 3$ - Firstname (FN) edit distance: $\delta_{FN}(x, x') \leq 3$ - Phone (PH) edit distance: $\delta_{PH}(x, x') \leq 3$ - Age (AGE) difference: $\delta_{AGE}(x, x') = 0$. Only candidate pairs that satisfy at least one of these constraints will be retained for further processing.

After applying these filtering constraints, we obtain a more refined set of candidate pairs and their corresponding subgraphs. These subgraphs focus on nodes and edges that satisfy the similarity constraints and are therefore more likely to represent entity matches.

3.3 Block Graph Construction and PPS

Next, we construct a Blocking Graph based on the refined candidate list. In this graph, nodes represent entities, and edges represent potential matches based

on their attributes. The weight of each edge is determined by the similarity between connected nodes. For simplicity and clarity, we stipulate that if two nodes satisfy one rule, the edge weight increases by one. We can define a Blocking Graph as shown in Fig. 3 e). This graph naturally divides the nodes from the original subgraph into two blocks, reducing the number of node comparisons and improving matching efficiency.

However, to improve matching accuracy, more sophisticated weighting methods can be applied. For example, the ARCS function is used to assign weights by summing the inverse cardinality of common blocks. The ARCS function assigns higher weights to pairs of entities that share smaller (i.e., more distinctive) blocks, and is defined as: $ARCS(p_i, p_j, B) = \sum_{b_k \in B_i \cap B_j} \frac{r_{p_i, p_j, b_k}}{|b_k|}$, where r_{p_i, p_j, b_k} denotes the number of rules satisfied by the entity pair (p_i, p_j) within the common block b_k . This modification ensures that pairs satisfying more rules receive proportionally higher weights while still considering the distinctiveness of smaller blocks. Similarly, other weighting functions can be applied to the Blocking Graph to assign higher weights to edges connecting nodes with strong co-occurrence patterns and lower weights to edges representing casual co-occurrences. Thus, with this weighting mechanism, the Blocking Graph not only reflects the similarity between entities more accurately, but it also adjusts the matching priorities based on the importance of different attributes, making the matching process more efficient overall.

Progressive Profile Scheduling (PPS). Once the Blocking Graph is constructed, we adopt the Progressive Profile Scheduling (PPS) technique to efficiently perform entity matching. PPS is an entity-centric scheduling method designed to prioritize nodes with the highest likelihood of matching by assessing their duplication likelihood.

First, within each block, nodes are sorted based on the average weight of their edges in the Blocking Graph, generating a SortedProfileList. The nodes in this list are ranked from highest to lowest, and nodes with higher average edge weights are prioritized for comparison, as they are more likely to match with other nodes. For instance, in Fig. 3 c), each node has multiple candidate nodes. We begin by comparing the node with the highest weight in the sorted list. During this process, PPS prunes unnecessary comparisons based on a predefined threshold (e.g., edge weight less than 2). For example, in the case of node v_{11} , if the edge weight between node v_{12} and v_{11} is below the threshold, this comparison is skipped, and v_{12} is removed from v_{11} 's candidate list.

By utilizing this selective pruning strategy, PPS significantly reduces the number of required comparisons, thereby improving matching efficiency. In this example, edges with a weight of 1 are ignored, leading to the removal of $v_2 \leftrightarrow v_5$ (weight 1), $v_{12} \leftrightarrow v_{11}$ (weight 1), $v_3 \leftrightarrow v_{10}$ (weight 1). The remaining comparisons are: $v_3 \leftrightarrow v_{11}$ (weight 2), $v_4 \leftrightarrow v_{11}$ (weight 2), $v_4 \leftrightarrow v_{10}$ (weight 2), $v_{11} \leftrightarrow v_{10}$ (weight 2), $v_3 \leftrightarrow v_4$ (weight 2). Consequently, the total number of comparisons is reduced from 8 to 5, as the three edges with a weight of 1 are ignored. Before publishing the final results, the aggregated values at the entity level will be validated to ensure they meet the user's demand.

Transitive Matching Optimization. In an ideal scenario, transitive relationships can be leveraged to further reduce the number of comparisons. For example, if both v_3 and v_4 match v_{11} , and v_{11} also matches v_{10} , we can infer through transitivity that v_3 , v_4 , v_{10} , and v_{11} all represent the same entity. As a result, redundant comparisons can be eliminated, leaving only the essential matches: $v_4 \leftrightarrow v_3$, $v_4 \leftrightarrow v_{10}$, $v_3 \leftrightarrow v_{11}$. This reduces the total number of comparisons from 5 to 3, thereby optimizing the resolution process.

3.4 Time Complexity.

Given a property graph G (n nodes, m edges) and a graph pattern Q ($|V_Q|$ nodes, $|E_Q|$ edges), subgraph isomorphism complexity is $O(m \cdot |E_Q|)$, reducing to $O(m)$ for small patterns ($|E_Q| \ll m$). Using Graph Differential Dependencies (GDDs) to focus on query-relevant subgraphs reduces the candidate set size $C \ll m$, improving efficiency. For C candidate node pairs, each constraint check takes $O(d)$, giving $O(C \cdot d)$. GDD constraints retain $C' = \beta C$ ($\beta \ll 1$), reducing this to $O(\beta C)$. Blocking graph construction requires $O(C' \cdot r)$ for edge weight computation and $O(C' \log C')$ for sorting. Progressive Profile Scheduling (PPS) prioritizes high-similarity pairs, reducing comparisons to $O(N \cdot k')$ with threshold-based pruning. The overall complexity is $O(m + \beta C + C' \log C' + N \cdot k')$. In typical cases, β and k' are small, making FastER nearly linear in m . A detailed derivation can be found in Appendix A.1.

4 Experimental Evaluation

Experimental Setting. All experiments were performed on a PC with a 2.40GHz Intel Xeon Silver 4210R processor and 32GB of memory, running Linux OS. The experiments were implemented in Python 3.10 and interacted with the Neo4j graph database (version 5.19.0).

Datasets. In this study, we used five graph benchmark datasets and five relational benchmark datasets (Table 1) from various domains. All datasets used in this paper are publicly available on the GitHub repository⁵. Since FastER is specifically designed for property graphs, we transformed the relational datasets into graph representations by leveraging their attribute relationships. The detailed conversion methods are provided in the GitHub repository. The reported values for Nodes, Edges, Node Types, and Edge Types in the relational datasets are based on their graph-transformed statistics.

Methods. We categorize the examined methods into On-Demand ER, Progressive ER, and Batch ER methods. **On-Demand ER methods** include BrewER and QDA. BrewER [10] is an on-demand framework that enables direct execution of SQL SP queries on dirty data while progressively returning query results. QDA [14] is a query-driven algorithm that optimizes matches within a data block by using selective predicates to reduce unnecessary record comparisons. **Batch**

⁵ https://anonymous.4open.science/r/On-Demand_Entity_Resolution-9DFB

Table 1: Graph and Relational Benchmark Datasets (NT: Node Types, ET: Edge Types, ND: Node Duplicates, ER: Entity Resolution)

Category	Dataset	Nodes	Edges	NT	ET	ND	Domain
Graph	WWC	2.688k	15.757k	5	9	202	Sports
	GDS	8.977k	80.365k	5	5	350	Airport
	Entity Resolution (ER)	1.237k	1.819k	4	3	12	Streaming
	ArXiv	88.07k	58.515k	2	1	5.92k	Research
	CiteSeer	4.393k	2.892k	2	1	456	Citations
Relational	SIGMOD20	13.58k	12.01k	3	2	3.06k	Cameras
	Altosight	12.47k	12.44k	3	2	453	Cameras
	Fodors-Zagats (FZ)	1.69k	1.73k	3	2	112	Restaurants
	DBLP-ACM (DA)	8.70k	9.82k	3	2	2.22k	Bibliography
	Amazon-Google (AG)	4.98k	4.59k	2	1	116	Software

ER methods include HG, RobEM, and Ditto. HG [27] employs a hierarchical graph attention transformation network for ER tasks. RobEM [26] leverages pre-trained language models (PLMs) for entity resolution, while Ditto [28] is a Transformer-based PLM approach designed for ER. **Progressive ER methods** include PSN and I-PES. PSN [11] employs dynamic window adjustment to prioritize and resolve matching entities by initially sorting and selecting the most relevant records. I-PES [9] is an incremental ER algorithm that dynamically maintains the comparison order using a priority queue to achieve progressive resolution. All hyperparameters are set to the default values from the original papers unless otherwise specified.

Evaluation Metrics. It is important to note that in our experiments, we do not evaluate precision and F1-score. This is because FastER itself is a framework that includes blocking and scheduling components and is independent of the matching function. Therefore, the matching functions for all methods in our experiments are labeled using ground truth. Additionally, following standard practice in ER on-demand literature [10], the final matching confirmation stage guarantees a precision of 1. As a result, we exclude precision and F1-score from our evaluation. Instead, we focus on metrics such as query recall and error rate, which are discussed in detail later.

We explore the following questions in subsequent subsections:

1. How does FastER perform in ER-on-demand scenario (Exp-1)?
2. How does FastER compare to SOTA batch processing methods (Exp-2)?
3. How well do progressive solutions perform in on-demand ER tasks? (Exp-3)
4. How does FastER perform on different components (Exp-4)?
5. How can users be guided to select appropriate rules (Exp-5)?

4.1 Exp-1: FastER vs On-Demand Baselines

Since FastER is a matcher-agnostic framework, we adopt an oracle matcher across all three methods to better evaluate its performance. This matcher accu-

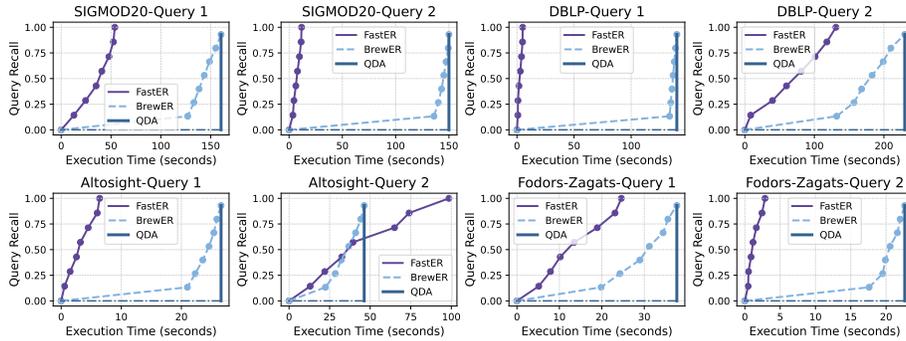


Fig. 4: FastER vs On-Demand baselines

rately labels all comparisons based on the known ground truth. As both BrewER and QDA are frameworks that can embed any blocking function, we employ JedAI [12, 13], which is based on a completely unsupervised blocking approach. We use its standard configuration, which relies on Token Blocking and Meta-blocking [12]. This blocking method has been proven to achieve good results with BrewER and QDA.

The reported performance of BrewER in our experiments may differ from that in its original paper [10], as the original study relies on ground truth for blocking, whereas we employ the unsupervised approach JedAI to better reflect real-world scenarios. This setup ensures a fair comparison with FastER.

To comprehensively evaluate performance, we executed two queries on different datasets, each with distinct attribute constraints, and generated ground truth matching sets for each subgraph. To assess effectiveness, we introduce *query recall*, which considers only the subset of interest to the user, rather than the entire result set. It is defined as: $R_{\text{query}} = \frac{|M_{\text{query}} \cap M_{\epsilon}|}{|M_{\text{query}}|}$ where M_{query} is the ground truth matching set within the subset, and M_{ϵ} is the set of matches found by the algorithm in the same subset.

First, we show how FastER performs on all graph data sets in Table 1 – captured in Fig. 5. The results highlight the real-time capability of FastER. In general, graph complexity dictates efficiency as the characteristics in Table 1 bear out. Further, Fig. 4 shows the relative performance of FastER *w.r.t.* on-demand baselines. The plots show QDA exhibits a typical stepwise execution curve because it must compare all candidate pairs before producing any output. In contrast, the recall rates of both FastER and BrewER show a gradual increase across all datasets.

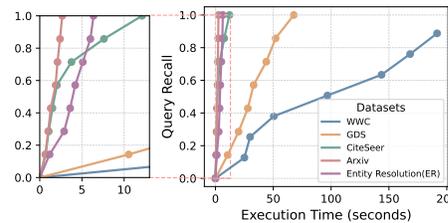


Fig. 5: Performance of FastER on Graphs

Additionally, FastER generally achieves a lower execution time by performing blocking after filtering, reducing blocking overhead. In contrast, BrewER partitions the entire dataset, incurring higher preparation costs. FastER underperforms on *Altosight-Query2* because the rules fail to effectively capture candidates, leading to insufficient filtering.

4.2 Exp-2: FastER vs Batch-Query Baseline

To evaluate FastER against batch processing methods, we define "average time per matching result" (T_{avg}) as a fair metric for speed comparison, and we still extract a sub-ground-truth. T_{avg} is computed as: $T_{avg} = \frac{T_{total}}{|M_{emitted} \cap M_{gt}|}$, where T_{total} is the total query execution time, $M_{emitted}$ is the set of entity matches that have been emitted, and M_{gt} represents the sub-ground-truth matching set.

Table 2 compares FastER and batch-query baselines across multiple datasets, focusing on recall and average time per matching result (T_{avg}). FastER consistently achieves the highest recall, demonstrating the effectiveness of rule filtering in capturing matching candidates. Regarding time efficiency, batch-query baselines require full dataset traversal, whereas our approach significantly enhances practical performance. T_{avg} comparisons show FastER achieves substantial speed improvements across most datasets, except for Amazon-Google. The reason for this exception lies in the large intra-cluster variance of the dataset, which makes it difficult for the rules to accurately capture all matching candidates. Attempting to capture all candidates would come at the cost of introducing a large number of irrelevant matches. Therefore, users need to carefully balance and weigh their decisions when mining and selecting rules. Specific optimization suggestions will be discussed in detail in Section 4.5.

4.3 Exp-3: FastER vs Progressive-Query Baselines

The most advanced progressive ER methods, such as *PSN* [11] and *I-PES* [9], rank entity pairs by matching likelihood, prioritizing the most probable matches to enhance early quality. However, new matches may alter the aggregated results, leading to inconsistencies. Unlike FastER, PBaseline lacks a final verification mechanism to ensure strict on-demand output, contributing to its high error rate. We evaluate PBaseline’s accuracy using the error rate over the first k emitted entities, denoted as $Err@k$: $Err@k = \frac{Errors}{k}$. Here, an *error* refers to an emitted result that does not meet user requirements, quantifying the proportion of incorrect matches in the first k outputs.

Fig. 6 shows error rate variations across datasets and k values. FastER, as a precise method, consistently maintains a 0% error rate by verifying matches individually. In contrast, PBaseline exhibits high error rates in most datasets, except for SIGMOD20, which has minimal intra-cluster variance. Thus, PBaseline is unreliable for ER-on-demand.

Table 2: FastER vs Batch-Query baseline

Dataset	Recall				Tavg (seconds)			
	HG	RobEM	Ditto	FastER	HG	RobEM	Ditto	FastER
FZ	0.954	1.000	1.000	1.000	2.781k	4.349k	0.917k	0.553k
DA	0.982	0.982	0.978	1.000	1.440k	3.198k	0.464k	0.052k
AG	0.654	0.846	0.786	0.841	1.162k	5.245k	0.818k	2.910k
WWC	0.902	0.585	0.927	0.923	1.069k	4.270k	1.105k	0.630k
GDS	0.943	0.800	0.900	1.000	1.817k	4.665k	0.678k	0.445k

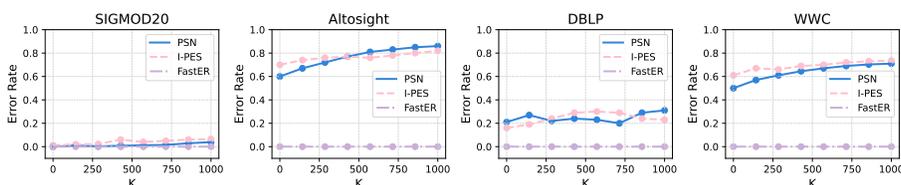


Fig. 6: FastER vs progressive-query baseline (error rate)

Table 3: Ablation Study of the FastER Framework

Method	Arxiv		CiteSeer		WWC	
	Relative Comp.	Recall	Relative Comp.	Recall	Relative Comp.	Recall
No-RF	453508.8	99.67%	14659.1	99.20%	117.9	99.00%
No-B	10.4	98.96%	29.4	98.67%	3.0	89.90%
No-PPS	1.6	97.78%	1.4	97.09%	2.3	89.20%
No-T	2.9	97.68%	3.0	96.42%	2.2	89.20%
FastER	1.0	97.68%	1.0	96.42%	1.0	89.20%

Method	Fodors-Zagat		DBLP-ACM		Amazon-Google	
	Relative Comp.	Recall	Relative Comp.	Recall	Relative Comp.	Recall
No-RF	1210.2	1	11662.8	1	301.1	99%
No-B	8.2	1	3.1	1	6.7	87%
No-PPS	1.2	1	1.6	1	1.4	82.18%
No-T	2.2	1	1.5	1	1.8	79%
FastER	1.0	1	1.0	1	1.0	79%

4.4 Exp-4: Ablation Study

In this experiment, we conducted an ablation study on the FastER framework to evaluate the impact of different components on matching efficiency and recall across multiple graph and relational datasets. We systematically removed the key components as follows. 1) No Rules Filtering (No-RF): Since blocking relies on

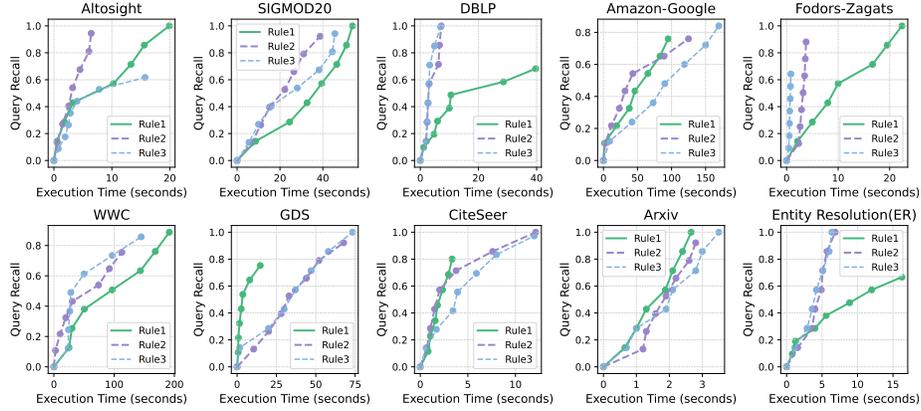


Fig. 7: Ablation study of the impact of multiple rules on filtering performance

rules filtering, this renders the system equivalent to a pure PPS method without blocking. 2) No Blocking (No-B): Blocking partitions the matching space to minimize unnecessary comparisons. 3) No Progressive Profile Scheduling (No-PPS): PPS enables the system to incrementally generate matches and employs pruning strategies to reduce the number of comparisons. 4) No Transitivity Matching (No-T): Transitivity matching leverages existing matches to infer new ones, enhancing completeness while reducing the number of comparisons.

The results are presented in Table 3 showing the relative number of comparisons in each ensuing method with respect to FastER’s number of comparison. In general, the results indicate that rules filtering is crucial for reducing the number of comparisons, as its removal significantly increases computational overhead. On datasets with low variance, eliminating rules filtering has minimal impact on recall, whereas on high-variance datasets, the effect is relatively significant. Blocking significantly affects execution time; removing it leads to a substantial increase in the number of comparisons, but has little impact on recall. PPS plays a key role in system responsiveness; its pruning mechanism effectively reduces the number of queries. Without PPS, processing time increases, though recall remains largely unaffected. Transitivity matching effectively reduces the number of comparisons without compromising recall.

4.5 Exp-5: Rules Selection Strategies for Efficient Entity Resolution

We conducted experiments on ten datasets, applying three different filtering rules to each. The specific rules used are provided in Appendix A.2.

The results (Fig. 7) show that rules with steeper slopes and higher recall are of higher quality, as they achieve superior performance within shorter execution times. Based on our findings, we summarize key principles for selecting filtering rules. First, the strictness of rules impacts execution time and recall. Looser rules increase candidate matches, leading to longer execution times, while overly

strict rules reduce execution time but risk excessive filtering, lowering recall. Thus, selecting appropriate rules is essential to balance efficiency and accuracy.

Moreover, as the complexity of relationships among nodes increases, the graph pattern should incorporate more nodes, and filtering rules should constrain multiple attributes to effectively capture structural dependencies.

When selecting a graph pattern, overly strict constraints should be avoided. For example: *Pattern 1*: $x \rightarrow y \rightarrow z \leftarrow y' \leftarrow x'$; *Pattern 2*: $x \rightarrow y \rightarrow z, x' \rightarrow y' \rightarrow z'$. Requiring node z' to be strictly identical to z may exclude many valid candidates. Instead, constraining the similarity between z and z' rather than enforcing identical entity IDs (eid) prevents over-filtering and enhances match coverage. In summary, filtering rule and graph pattern selection directly influence the trade-off between execution time and recall. Stricter rules are preferable when execution time is a priority, whereas relatively looser rules are recommended when balancing execution time and recall. Furthermore, our latest research also explores an automated rule recommendation mechanism, and we will report further progress in future work (see GitHub).

5 Conclusion

We introduce FastER, an efficient on-demand entity resolution (ER) approach for property graphs based on Graph Differential Dependencies (GDDs), addressing the six key challenges outlined in Figure 1. FastER captures complex graph patterns for high-precision entity matching and employs Progressive Configuration Scheduling (PPS) to incrementally output results and provide real-time feedback. To enhance computational efficiency, FastER applies rule-based filtering, reducing candidate entity pairs by a factor of 10^3 to 10^5 , and prioritizes user queries, focusing on user-specified subgraphs to avoid unnecessary computations. In dynamic environments, it recalculates only affected portions of the graph, preventing full-scale redundant processing, while pre-filtering matching functions to minimize computational overhead. Experimental results demonstrate that FastER significantly outperforms existing ER methods in both processing time and recall. Future research could explore advanced filtering techniques for heterogeneous data sources and automated rule selection mechanisms to better handle intra-cluster variations.

References

1. Papadakis, G., Fisichella, M., Schoger, F., Mandilaras, G., Augsten, N., Nejd, W.: How to reduce the search space of Entity Resolution: with Blocking or Nearest Neighbor search? arXiv preprint arXiv:2202.12521 (2022).
2. Brinkmann, A., Shraga, R., Bizer, C.: SC-Block: Supervised Contrastive Blocking within Entity Resolution Pipelines. arXiv preprint arXiv:2303.03132 (2023).
3. Papadakis, G., Fisichella, M., Schoger, F., Mandilaras, G., Augsten, N., Nejd, W.: Benchmarking Filtering Techniques for Entity Resolution. In: 2023 IEEE 39th International Conference on Data Engineering (ICDE), pp. 653–666 (2023).

4. Wang, S., Li, X., Meng, Y., Zhang, T., Ouyang, R., Li, J., Wang, G.: *k*NN-NER: Named Entity Recognition with Nearest Neighbor Search. arXiv preprint arXiv:2203.17103 (2022).
5. Christen, P.: Data matching: Concepts and techniques for record linkage, entity resolution, and duplicate detection. Springer, Berlin, Heidelberg (2012).
6. Christen, P.: A survey of indexing techniques for scalable record linkage and deduplication. *IEEE Trans. Knowl. Data Eng.* **24**(9), 1537–1555 (2012).
7. Mann, W., Augsten, N., Bouros, P.: An empirical evaluation of set similarity join techniques. *PVLDB* **9**(9), 636–647 (2016).
8. Jiang, Y., Li, G., Feng, J., Li, W.: String similarity joins: An experimental evaluation. *PVLDB* **7**(8), 625–636 (2014).
9. Gazzarri, L., Herschel, M.: Progressive entity resolution over incremental data. In: 26th International Conference on Extending Database Technology (EDBT), pp. 594–599 (2023).
10. Zecchini, L., Simonini, G., Bergamaschi, S., & Naumann, F. BrewER: Entity resolution on-demand. *Proceedings of the VLDB Endowment*, 16(12), 4026–4029.(2023).
11. Simonini, G., Papadakis, G., Palpanas, T., Bergamaschi, S.: Schema-agnostic progressive entity resolution. *IEEE Trans. Knowl. Data Eng.* **31**(6), 1208–1221 (2019).
12. Papadakis, G., Mandilaras, G.M., Gagliardelli, L., Simonini, G., Thanos, E., Giannakopoulos, G., Bergamaschi, S., Palpanas, T., Koubarakis, M.: Three-dimensional entity resolution with JedAI. *Inf. Syst.* **93**, Article 101565 (2020).
13. Papadakis, G., Tsekouras, L., Thanos, E., Giannakopoulos, G., Palpanas, T., Koubarakis, M.: Domain- and structure-agnostic end-to-end entity resolution with JedAI. *SIGMOD Rec.* **48**(4), 30–36 (2019).
14. Altwaijry, H., Kalashnikov, D.V., Mehrotra, S.: QDA: A query-driven approach to entity resolution. *IEEE Trans. Knowl. Data Eng.* **29**(2), 402–417 (2017).
15. Madhavan, J., Cohen, S., Dong, X.L., Halevy, A.Y., Jeffery, S.R., Ko, D., Yu, C.: Web-scale data integration: You can afford to pay as you go. In: *CIDR*, pp. 342–350 (2007).
16. De Una, D., Rümmele, N., Gange, G., Schachte, P., Stuckey, P.J.: Machine learning and constraint programming for relational-to-ontology schema mapping. In: *IJCAI*, vol. 27, pp. 2149–2155 (2018).
17. Kimmig, A., Memory, A., Getoor, L.: A collective, probabilistic approach to schema mapping. In: *IEEE International Conference on Data Engineering (ICDE)*, pp. 921–932 (2017).
18. Kimmig, A., Memory, A., Miller, R.J., Getoor, L.: A collective, probabilistic approach to schema mapping using diverse noisy evidence. *IEEE Trans. Knowl. Data Eng.* **31**(8), 1426–1439 (2018).
19. Qian, L., Cafarella, M.J., Jagadish, H.V.: Sample-driven schema mapping. In: *ACM International Conference on Management of Data (SIGMOD)*, pp. 73–84 (2012).
20. Kwashie, S., Liu, L., Liu, J., Stumptner, M., Li, J., Yang, L.: Certus: An effective entity resolution approach with graph differential dependencies (GDDs). *Proc. VLDB Endow.* **12**(6), 653–666 (2019).
21. Fan, W., Fan, Z., Tian, C., Dong, X.L.: Keys for graphs. *Proc. VLDB Endow.* **8**(12), 1590–1601 (2015).
22. Fan, W., Wu, Y., Xu, J.: Functional dependencies for graphs. In: *2016 International Conference on Management of Data*, pp. 1843–1857 (2016).
23. Fan, W., Geerts, et al.: Conditional functional dependencies for capturing data inconsistencies. *ACM Trans. Database Syst.* **33**(2), 1–48 (2008).
24. Fan, W., Lu, P.: Dependencies for graphs. *ACM Trans. Database Syst.* **44**(2), 1–40 (2019).

25. Zhang, Y., Kwashie, S., Bewong, M., Hu, J., Mahboubi, A., Guo, X., Feng, Z.: Discovering graph differential dependencies. In: Australasian Database Conference, Springer, pp. 259–272 (2023).
26. Rastaghi, M.A., Kamaloo, E., Rafiei, D.: Probing the robustness of pre-trained language models for entity matching. In: ACM International Conference on Information and Knowledge Management (CIKM), pp. 1728–1732 (2022).
27. Yao, D., Gu, Y., Cong, G., Jin, H., Lv, X.: Entity resolution with hierarchical graph attention networks. In: 2022 International Conference on Management of Data (SIGMOD), pp. 429–442 (2022).
28. Li, Y., Li, J., Suhara, Y., Doan, A., Tan, W.-C.: Deep entity matching with pre-trained language models. Proc. VLDB Endow. **14**(1), 50–60 (2020).

Appendix A.1: Time Complexity Analysis

(1) Neo4j-Based Subgraph Isomorphism Computation: Subgraph isomorphism in a property graph G with n nodes and m edges, given a query pattern Q with $|V_Q|$ nodes and $|E_Q|$ edges, is in general an NP-hard problem. However, when using Neo4j (via Cypher queries) for pattern matching, the complexity can be approximated by scanning the graph for each element of the pattern. In the worst case, the query engine may have to traverse $O(m)$ relationships for each of the $|E_Q|$ edges in Q , leading to a time complexity on the order of $O(m \cdot |E_Q|)$. In practice, $|E_Q|$ is typically much smaller than m (the patterns derived from Graph Differential Dependencies are small), so this cost approaches $O(m)$ – essentially linear in the size of the graph. (If the query pattern includes labels or indexed properties, Neo4j can leverage them to narrow down matches, but in the absence of highly selective indices, one can assume a linear scan per pattern edge in the worst case.) Thus, executing the subgraph isomorphism query in Neo4j will generally scale linearly with the graph size for small patterns, but it could grow linearly with $|E_Q|$ for more complex patterns.

(2) Impact of GDD Filtering and Blocking: FastER introduces Graph Differential Dependencies (GDDs) as constraints to drastically reduce the search space before performing expensive comparisons. Instead of searching the entire graph G , GDDs focus the computation on a query-relevant subgraph. Concretely, suppose applying the GDD rules yields a set of C candidate node pairs (potentially matching entity pairs), where $C \ll m$. This means only C pairs need to be considered further, as opposed to $\Theta(n^2)$ or other large combinations without filtering. Checking each candidate pair against the set of d GDD constraints incurs a cost of $O(C \cdot d)$ in total (each constraint check is $O(1)$ or a small constant factor, so this is effectively $O(C)$). After evaluating all GDD conditions, only a fraction of the pairs survive the filtering. Let C' denote the number of pairs remaining after GDD filtering; empirically we can express $C' = \beta C$ with a small fraction $\beta \ll 1$. These C' filtered candidates are then organized using a blocking strategy. FastER builds a blocking graph where nodes represent entity profiles and edges represent candidate matches between profiles. Constructing this graph and computing a similarity weight for each of the C' edges takes $O(C' \cdot r)$ time, where r is the number of attributes or features used to calculate

the edge weight (this is linear in C' if r is a fixed small number of features). After weight computation, the candidate pairs (edges) are sorted by their similarity score, which adds an $O(C' \log C')$ overhead. The combination of GDD-based filtering and blocking ensures that the number of comparisons to be performed is vastly reduced and that those comparisons are structured: instead of considering all possible pairs, we only deal with C' high-likelihood pairs, and we have them sorted by likelihood for efficient processing. In summary, these steps reduce the problem size from m (or worse) down to C' and impose only linear or near-linear overheads in doing so.

(3) Progressive Profile Scheduling (PPS) Optimization: After filtering and blocking, FastER employs Progressive Profile Scheduling (PPS) to perform the actual entity matching in an efficient, incremental fashion. PPS processes the sorted list of candidate pairs in descending order of similarity, which means it attempts the most likely matches first. This progressive approach has two major benefits for time complexity. First, it produces results early (useful for real-time “on-demand” requirements), and second, it enables threshold-based pruning of comparisons. In practice, we set a similarity threshold such that if a candidate pair’s weight falls below this threshold, it is very unlikely to be an actual match and can be skipped entirely. Because the candidates are processed from highest to lowest similarity, once we reach pairs below the threshold, we can stop further comparisons in that block or for that profile. This significantly limits the number of comparisons each profile (entity) participates in. Rather than comparing each profile with all its C' potential matches, each profile will on average only be compared with a small constant number k' of top-ranked candidates (until the threshold condition causes pruning). If N is the number of profiles under consideration (e.g. the number of query-target entities that need to be resolved on demand), the comparison cost under PPS becomes $O(N \cdot k')$. Here k' can be viewed as the average number of comparisons per profile after early pruning (in many cases, k' is effectively bounded by a small value, since true duplicates for an entity tend to be limited in number or caught in the first few highest-similarity links). Moreover, as matches are found, transitive matching can further reduce comparisons: if profile A matches B, and B matches C, PPS can infer A matches C without a direct comparison, avoiding redundant checks. This transitivity (clustering duplicates as they are discovered) often reduces the effective k' even more. Overall, PPS ensures that the matching phase scales roughly linearly with the number of target entities, and the constant of proportionality k' is kept low by prioritization and pruning. This is a substantial improvement over a naive approach that might require comparing every candidate pair (which would be on the order of C' or worse per profile without PPS).

(4) Overall Time Complexity Estimation: Combining all the above components, we can derive the overall time complexity of the FastER framework. Summing the costs of subgraph pattern matching, GDD constraint filtering, blocking graph construction, and progressive matching, we get:

$$T(n) = O(m \cdot |E_Q|) + O(C \cdot d) + O(C' \log C') + O(N \cdot k') ,$$

where each term corresponds to the stages analyzed: subgraph isomorphism on the original graph ($O(m \cdot |E_Q|)$), GDD filtering of C candidates ($O(C \cdot d)$, which effectively becomes $O(C)$ and then $O(\beta C)$ after filtering), sorting and preparation of C' candidate pairs ($O(C' \log C')$), and the progressive comparisons ($O(N \cdot k')$). For typical use cases, $|E_Q|$ and d are small constants (small pattern and a fixed number of GDD rules), and β, k' are small fractions or constants reflecting the effectiveness of filtering and pruning. Thus, this complexity can be simplified to:

$$O(m + \beta C + C' \log C' + N \cdot k'),$$

noting that $C' = \beta C \ll C$. In an ideal scenario (best case), the filtering is highly selective (β is extremely small) and the similarity threshold is high enough that k' remains very low. In such cases, the later terms become negligible, and the dominant cost is just scanning the relevant portion of the graph, yielding near-linear time $O(m)$ for the entire process. In a more conservative scenario (average case), we still expect β and k' to be significantly less than 1 (for instance, filtering might cut candidate pairs down to only a few percent, and each entity only needs a handful of comparisons), making the overall complexity close to linear in the size of the input graph and the number of query entities. Even in a worst-case scenario where the filtering is less effective ($\beta \approx 1$) and the threshold is low (large k'), the complexity $O(m + C' \log C' + N \cdot k')$ remains far more tractable than the naive $O(n^2)$ pairwise comparison of all entities. In summary, FastER’s design leverages structural constraints (GDDs), intelligent blocking, and progressive processing to achieve a much lower time complexity than brute-force entity resolution, especially benefiting from on-demand focus (small N) and the typically sparse nature of true duplicate links (small k').

Appendix A.2: GDD Rules and Their Cypher Implementations

Dataset--rule	Graph pattern $Q[\bar{u}]$	constraints $\Phi_X \rightarrow \Phi_Y$	Cypher query statement	query recall
AltoSight-rule1		$\phi: \{ \delta_model(c1.model, c2.model) = 0$ OR $ \text{intersection}(\text{split}(c1.description), \text{split}(c2.description)) > 0$ $\rightarrow \delta_eid(c1, c2) = 0$	<pre>MATCH (c1:Camera)-[MADE_BY]->(b1:Brand), (c2:Camera)-[MADE_BY]->(b2:Brand), (b1)-[HAS_SIZE]->(s1:Size), (b2)-[HAS_SIZE]->(s2:Size) WHERE (c1.model = c2.model OR (c1.description <> 'N\ A' AND c2.description <> 'N\ A' AND size(apoc.coll.intersection(apoc.text.split(c1.description, '\ s+'), apoc.text.split(c2.description, '\ s+')) > 0)) RETURN c1, c2, s1, s2, b1, b2</pre>	1
AltoSight-rule2		$\phi: \{ \delta_model(c1.model, c2.model) = 0$ $\rightarrow \delta_eid(c1, c2) = 0$	<pre>MATCH (c1:Camera)-[MADE_BY]->(b1:Brand), (c2:Camera)-[MADE_BY]->(b2:Brand), (b1)-[HAS_SIZE]->(s1:Size), (b2)-[HAS_SIZE]->(s2:Size) WHERE (c1.model = c2.model) RETURN c1, c2, s1, s2, b1, b2</pre>	0.92
AltoSight-rule3		$\phi: \{ \text{intersection}(\text{split}(c1.description), \text{split}(c2.description)) > 0$ $\rightarrow \delta_eid(c1, c2) = 0$	<pre>MATCH (c1:Camera)-[MADE_BY]->(b1:Brand), (c2:Camera)-[MADE_BY]->(b2:Brand), (b1)-[HAS_SIZE]->(s1:Size), (b2)-[HAS_SIZE]->(s2:Size) WHERE size(apoc.coll.intersection(apoc.text.split(c1.description, '\ s+'), apoc.text.split(c2.description, '\ s+')) > 0) RETURN c1, c2, s1, s2, b1, b2</pre>	0.96
WWC-rule1		$\phi_1: \{ \delta_levenshtein(p1.name, p2.name) > 0.75$ $\rightarrow \delta_eid(p1, p2) = 0$ $\phi_2: \{ \delta_levenshtein(p1.name, p2.name) > 0.7$ $\rightarrow \delta_eid(p1, p2) = 0$	<pre>MATCH (p1:Person)-[RELATED_TO]->(t1:Team)-[PARTICIPATED_IN]->(m1:Match), (p2:Person)-[RELATED_TO]->(t2:Team)-[PARTICIPATED_IN]->(m2:Match) WHERE apoc.text.levenshteinSimilarity(p1.name, p2.name) > 0.75 RETURN p1, p2, t1, t2, m1, m2 UNION MATCH (p1:Person)-[PARTICIPATED_IN]->(m1:Match), (p2:Person)-[PARTICIPATED_IN]->(m2:Match) WHERE p1 <> p2 AND apoc.text.levenshteinSimilarity(p1.name, p2.name) > 0.7 AND m.stage = 'Round of 16' RETURN p1, p2, null AS t1, null AS t2, m AS m1, m AS m2</pre>	0.967
WWC-rule2		$\phi_1: \{ \delta_levenshtein(p1.name, p2.name) > 0.75$ $\rightarrow \delta_eid(p1, p2) = 0$ $\phi_2: \{ \delta_levenshtein(p1.name, p2.name) > 0.9$ $\rightarrow \delta_eid(p1, p2) = 0$	<pre>MATCH (p1:Person)-[RELATED_TO]->(t1:Team)-[PARTICIPATED_IN]->(m1:Match), (p2:Person)-[RELATED_TO]->(t2:Team)-[PARTICIPATED_IN]->(m2:Match) WHERE apoc.text.levenshteinSimilarity(p1.name, p2.name) > 0.75 AND (m1.stage = 'Round of 16' AND m2.stage = 'Round of 16') RETURN p1, p2, t1, t2, m1, m2 UNION MATCH (p1:Person)-[PARTICIPATED_IN]->(m1:Match), (p2:Person)-[PARTICIPATED_IN]->(m2:Match) WHERE p1 <> p2 AND apoc.text.levenshteinSimilarity(p1.name, p2.name) > 0.9 AND m.stage = 'Round of 16' RETURN p1, p2, null AS t1, null AS t2, m AS m1, m AS m2</pre>	0.857
WWC-rule3		$\phi_1: \{ c1.description \neq 'N\ A'$ $\wedge c2.description \neq 'N\ A'$ $\wedge \text{intersection}(\text{split}(c1.description), \text{split}(c2.description)) > 0$ $\rightarrow \delta_eid(c1, c2) = 0$ $\phi_2: \{ c1.price = c2.price$ $\rightarrow \delta_eid(c1, c2) = 0$	<pre>MATCH (c1:Camera)-[MANUFACTURED_BY]->(b1:Brand), (c2:Camera)-[MANUFACTURED_BY]->(b2:Brand), (b1)-[OFFERS]->(t1:CameraType), (b2)-[OFFERS]->(t2:CameraType) WHERE (b1.name CONTAINS 'leica' OR b2.name CONTAINS 'leica') AND ('N\ A' AND c2.description <> 'N\ A' AND size(apoc.coll.intersection(apoc.text.split(c1.description, '\ s+'), apoc.text.split(c2.description, '\ s+')) > 0) OR c1.price = c2.price) RETURN c1, c2, t1, t2, b1, b2</pre>	0.923
SIGMOD20-rule1		$\phi_1: \{ c1.description \neq 'N\ A'$ $\wedge c2.description \neq 'N\ A'$ $\wedge \text{intersection}(\text{split}(c1.description), \text{split}(c2.description)) > 0$ $\rightarrow \delta_eid(c1, c2) = 0$ $\phi_2: \{ c1.price = c2.price$ $\rightarrow \delta_eid(c1, c2) = 0$	<pre>MATCH (c1:Camera)-[MANUFACTURED_BY]->(b1:Brand), (c2:Camera)-[MANUFACTURED_BY]->(b2:Brand), (b1)-[OFFERS]->(t1:CameraType), (b2)-[OFFERS]->(t2:CameraType) WHERE (b1.name CONTAINS 'leica' OR b2.name CONTAINS 'leica') AND ((c1.description <> 'N\ A' AND c2.description <> 'N\ A' AND size(apoc.coll.intersection(apoc.text.split(c1.description, '\ s+'), apoc.text.split(c2.description, '\ s+')) > 0) OR c1.price = c2.price) RETURN c1, c2, t1, t2, b1, b2</pre>	1
SIGMOD20-rule2		$\phi_1: \{ c1.description \neq 'N\ A'$ $\wedge c2.description \neq 'N\ A'$ $\wedge \text{intersection}(\text{split}(c1.description), \text{split}(c2.description)) > 0$ $\rightarrow \delta_eid(c1, c2) = 0$ $\phi_2: \{ c1.price = c2.price$ $\rightarrow \delta_eid(c1, c2) = 0$	<pre>MATCH (c1:Camera)-[MANUFACTURED_BY]->(b1:Brand), (c2:Camera)-[MANUFACTURED_BY]->(b2:Brand), (b1)-[OFFERS]->(t1:CameraType), (b2)-[OFFERS]->(t2:CameraType) WHERE (b1.name CONTAINS 'leica' OR b2.name CONTAINS 'leica') AND ((c1.description <> 'N\ A' AND c2.description <> 'N\ A' AND size(apoc.coll.intersection(apoc.text.split(c1.description, '\ s+'), apoc.text.split(c2.description, '\ s+')) > 0) OR c1.price = c2.price) RETURN c1, c2, t1, t2, b1, b2</pre>	0.805
SIGMOD20-rule3		$\phi_1: \{ c1.description \neq 'N\ A'$ $\wedge c2.description \neq 'N\ A'$ $\wedge \text{intersection}(\text{split}(c1.description), \text{split}(c2.description)) > 0$ $\rightarrow \delta_eid(c1, c2) = 0$ $\phi_2: \{ c1.price = c2.price$ $\rightarrow \delta_eid(c1, c2) = 0$	<pre>MATCH (c1:Camera)-[MANUFACTURED_BY]->(b1:Brand), (c2:Camera)-[MANUFACTURED_BY]->(b2:Brand), (b1)-[OFFERS]->(t1:CameraType), (b2)-[OFFERS]->(t2:CameraType) WHERE (b1.name CONTAINS 'leica' OR b2.name CONTAINS 'leica') AND ((c1.description <> 'N\ A' AND c2.description <> 'N\ A' AND size(apoc.coll.intersection(apoc.text.split(c1.description, '\ s+'), apoc.text.split(c2.description, '\ s+')) > 0) OR c1.price = c2.price) RETURN c1, c2, t1, t2, b1, b2</pre>	0.916

Fig. 8: Description of the GDD rules and its Cypher implementation.

name	Graph pattern $Q[\bar{u}]$	constraints $\Phi_X \rightarrow \Phi_Y$	Cypher query statement	query recall
Entity Resolution-rule1		$\phi_1: \{ u1.phone = u2.phone \rightarrow \delta_eid(u1, u2) = 0$ $\phi_2: \{ u1.last_name = u2.last_name \} \rightarrow \delta_eid(u1, u2) = 0$	<pre>MATCH (u1:User)-[WATCHED]->(m1:Movie), (u2:User)-[WATCHED]->(m2:Movie), (u1)-[USES]->(p1:IPAddress), (u2)-[USES]->(p2:IPAddress) WHERE u1 <= u2 AND u1.phone = u2.phone OR u1.last_name = u2.last_name RETURN u1, u2, m1, m2, p1, p2</pre>	0.667
Entity Resolution-rule2		$\phi: \{ u1.phone = u2.phone \wedge u1.last_name = u2.last_name \} \rightarrow \delta_eid(u1, u2) = 0$	<pre>MATCH (u1:User)-[WATCHED]->(m1:Movie), (u2:User)-[WATCHED]->(m2:Movie) WHERE u1 <= u2 AND u1.phone = u2.phone AND u1.last_name = u2.last_name RETURN u1, u2</pre>	1
Entity Resolution-rule3		$\phi: \{ u1.last_name = u2.last_name \} \rightarrow \delta_eid(u1, u2) = 0$	<pre>MATCH (u1:User), (u2:User) WHERE u1 <= u2 AND u1.last_name = u2.last_name RETURN u1, u2</pre>	1
DBLP-rule1		$\phi: \{ \delta_levenshtein(a1.name, a2.name) > 0.4 \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper)-[PUBLISHED_IN]->(v1:Venue), (a2:Author)-[WROTE]->(p2:Paper)-[PUBLISHED_IN]->(v2:Venue) WHERE v1.name CONTAINS 'acm' AND v2.name CONTAINS 'acm' AND apoc.text.levenshteinSimilarity(a1.name, a2.name) > 0.4 RETURN a1, a2, p1, p2, v1, v2</pre>	0.682
DBLP-rule2		$\phi: \{ \delta_levenshtein(p1.title, p2.title) > 0.6 \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper)-[PUBLISHED_IN]->(v1:Venue), (a2:Author)-[WROTE]->(p2:Paper)-[PUBLISHED_IN]->(v2:Venue) WHERE v1.name CONTAINS 'acm' AND v2.name CONTAINS 'acm' AND apoc.text.levenshteinSimilarity(p1.title, p2.title) > 0.6 RETURN a1, a2, p1, p2, v1, v2</pre>	1
DBLP-rule3		$\phi: \{ \delta_levenshtein(p1.title, p2.title) > 0.6 \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper)-[PUBLISHED_IN]->(v1:Venue), (a2:Author)-[WROTE]->(p2:Paper)-[PUBLISHED_IN]->(v2:Venue) WHERE v1.name CONTAINS 'acm' AND v2.name CONTAINS 'acm' AND apoc.text.levenshteinSimilarity(p1.title, p2.title) > 0.9 RETURN a1, a2, p1, p2, v1, v2</pre>	0.992
Arxiv-rule1		$\phi: \{ \delta_levenshteinDist(a1.name, a2.name) \leq 2 \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper), (a2:Author)-[WROTE]->(p2:Paper) WHERE a1 <= a2 AND a1.name contains 'robbert' AND a2.name contains 'robbert' AND apoc.text.levenshteinDistance(a1.name, a2.name) <= 2 RETURN a1, a2, p1, p2</pre>	1
Arxiv-rule2		$\phi: \{ \delta_levenshteinDist(a1.name, a2.name) \leq 1 \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper), (a2:Author)-[WROTE]->(p2:Paper) WHERE a1 <= a2 AND a1.name contains 'robbert' AND a2.name contains 'robbert' AND apoc.text.levenshteinDistance(a1.name, a2.name) <= 1 RETURN a1, a2, p1, p2</pre>	1
CiteSeer-rule1		$\phi: \{ a1.name = a2.name \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper), (a2:Author)-[WROTE]->(p2:Paper) WHERE a1 <= a2 AND p1.title contains 'knowledge' and p2.title contains 'knowledge' AND a1.name = a2.name RETURN a1, a2, p1, p2</pre>	0.801
CiteSeer-rule2		$\phi: \{ \delta_levenshteinDist(a1.name, a2.name) \leq 1 \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper), (a2:Author)-[WROTE]->(p2:Paper) WHERE a1 <= a2 AND p1.title contains 'knowledge' and p2.title contains 'knowledge' AND apoc.text.levenshteinDistance(a1.name, a2.name) <= 5 RETURN a1, a2, p1, p2</pre>	1
CiteSeer-rule3		$\phi: \{ \delta_levenshteinDist(a1.name, a2.name) \leq 4 \} \rightarrow \delta_eid(a1, a2) = 0$	<pre>MATCH (a1:Author)-[WROTE]->(p1:Paper), (a2:Author)-[WROTE]->(p2:Paper) WHERE a1 <= a2 AND p1.title contains 'knowledge' and p2.title contains 'knowledge' AND apoc.text.levenshteinDistance(a1.name, a2.name) <= 4 RETURN a1, a2, p1, p2</pre>	0.972

Fig. 9: Description of the GDD rules and its Cypher implementation.

Dateset--rule	Graph pattern $Q(\bar{u})$	constraints $\Phi_X \rightarrow \Phi_Y$	Cypher query statement	query recall
Amazon-rule1		$\phi: \{ (\text{intersection}(\text{split}(s1.name, ""))) > 1 \vee \delta_{\text{LevenshteinDist}}(s1.name, s2.name) < 6 \wedge \{ \text{toFloat}(s1.price) - \text{toFloat}(s2.price) < 3 \} \rightarrow \delta_{\text{eid}}(s1, s2) = 0$	<pre>MATCH (s1:Software)-[MADE_BY]->(m1:Manufacturer), (s2:Software)-[MADE_BY]->(m2:Manufacturer) WHERE (toFloat(s1.price)<10 AND toFloat(s2.price)<10) AND ((size(apoc.coll.intersection(apoc.text.split(s1.name, ''), apoc.text.split(s2.name, '')))) > 1 OR apoc.text.levenshteinDistance(s1.name, s2.name) < 6) AND abs(toFloat(s1.price) - toFloat(s2.price)) < 3) RETURN s1, s2, m1, m2</pre>	0.855
Fodors-Zagats-rule1		$\phi: \{ \text{"new york"} \in c1.value \wedge \text{"new york"} \in c2.value \wedge \text{SIZE}(\text{intersection}(\text{split}(r1.name, ""), \text{split}(r2.name, ""))) > 0 \} \rightarrow \delta_{\text{eid}}(r1, r2) = 0$	<pre>MATCH (r1:Restaurant)-[LOCATED_AT]->(a1:Address)-[IN_CITY]->(c1:City), (r2:Restaurant)-[LOCATED_AT]->(a2:Address)-[IN_CITY]->(c2:City) WHERE c1.value CONTAINS "new york" AND c2.value CONTAINS "new york" AND r1.id < r2.id WITH r1, r2, apoc.text.split(r1.name, "") AS r1Words, apoc.text.split(r2.name, "") AS r2Words, a1, a2, c1, c2 WHERE SIZE(apoc.coll.intersection(r1Words, r2Words)) > 0 RETURN r1, r2, a1, a2, c1, c2</pre>	0.970
GDS-rule3		$\phi_1: \{ \delta_{\text{LevenshteinDist}}(a1.city, a2.city) < 2 \} \rightarrow \delta_{\text{eid}}(a1, a2) = 0$ $\phi_2: \{ \text{SIZE}(\text{intersection}(\text{split}(a1.name, ""), \text{split}(a2.name, ""))) > 4 \} \rightarrow \delta_{\text{eid}}(a1, a2) = 0$ $\phi_3: \{ \delta_{\text{LevenshteinDist}}(a1.name, a2.name) < 3 \} \rightarrow \delta_{\text{eid}}(a1, a2) = 0$ $\phi_4: \{ a1.number = a2.number \} \rightarrow \delta_{\text{eid}}(a1, a2) = 0$	<pre>MATCH (a1:Airport)-[LOCATED_IN]->(c01:Continent), (a2:Airport)-[LOCATED_IN]->(c02:Continent) WHERE c01.name CONTAINS "EU" AND c02.name CONTAINS "EU" AND a1 <> a2 // Ensure distinct airports AND ((a1.city IS NOT NULL AND a2.city IS NOT NULL AND apoc.text.levenshteinDistance(a1.city, a2.city) < 2) OR (size(apoc.coll.intersection(apoc.text.split(a1.name, ''), apoc.text.split(a2.name, '')))) > 4 OR apoc.text.levenshteinDistance(a1.name, a2.name) < 3) OR (a1.number IS NOT NULL AND a2.number IS NOT NULL AND a1.number = a2.number) OPTIONAL MATCH (a1)-[CONNECTED_TO]->(common:Airport)-[CONNECTED_TO]->(a2) RETURN a1, a2, c01, c02</pre>	0.99
GDS-rule1		$\phi_1: \{ c1 = c2 \} \rightarrow \delta_{\text{eid}}(a1, a2) = 0$ $\phi_2: \{ c1 = c2 \wedge \delta_{\text{jw}}(a1.city, a2.city) < 0.55 \} \rightarrow \delta_{\text{eid}}(a1, a2) = 0$ $\phi_3: \{ c1 = c2 \wedge \delta_{\text{jw}}(a1.name, a2.name) < 0.46 \}$	<pre>MATCH (a1:Airport)-[LOCATED_IN]->(c1:City), (a2:Airport)-[LOCATED_IN]->(c2:City) WHERE c1 = c2 AND (toInteger(a1.number) < 1000 OR toInteger(a2.number) < 1000) AND apoc.text.jaroWinklerDistance(a1.city, a2.city) < 0.55 AND apoc.text.jaroWinklerDistance(a1.name, a2.name) < 0.46 RETURN a1, a2, c1, c2</pre>	0.791

Fig. 10: Description of the GDD rules and its Cypher implementation.