

# CO-DEFEND: Continuous Decentralized Federated Learning for Secure DoH-Based Threat Detection

Diego Cajaraville-Aboy, Marta Moure-Garrido, Carlos Beis-Penedo, Carlos Garcia-Rubio, Rebeca P. Díaz-Redondo, Celeste Campo, Ana Fernández-Vilas, and Manuel Fernández-Veiga

## Abstract

The use of DNS over HTTPS (DoH) tunneling by an attacker to hide malicious activity within encrypted DNS traffic poses a serious threat to network security, as it allows malicious actors to bypass traditional monitoring and intrusion detection systems while evading detection by conventional traffic analysis techniques. Machine Learning (ML) techniques can be used to detect DoH tunnels; however, their effectiveness relies on large datasets containing both benign and malicious traffic. Sharing such datasets across entities is challenging due to privacy concerns. In this work, we propose CO-DEFEND (Continuous Decentralized Federated Learning for Secure DoH-Based Threat Detection), a Decentralized Federated Learning (DFL) framework that enables multiple entities to collaboratively train a classification machine learning model while preserving data privacy and enhancing resilience against single points of failure. The proposed DFL framework, which is scalable and privacy-preserving, is based on a federation process that allows multiple entities to train online their local models using incoming DoH flows in real time as they are processed by the entity. In addition, we adapt four classical machine learning algorithms, Support Vector Machines (SVM), Logistic Regression (LR), Decision Trees (DT), and Random Forest (RF), for federated scenarios, comparing their results with more computationally complex alternatives such as neural networks. We compare our proposed method by using the dataset CIRA-CIC-DoHBrw-2020 with existing machine learning approaches to demonstrate its effectiveness in detecting malicious DoH tunnels and the benefits it brings.

## Index Terms

Decentralized Federated Learning, DNS-over-HTTPS, malicious DoH tunnel detection, Privacy-Preserving

## I. INTRODUCTION

THE growing adoption of Domain Name System (DNS) over Hypertext Transfer Protocol Secure (HTTPS), known as DoH [1], enhances user privacy by encrypting DNS queries, thereby preventing unauthorized monitoring. However, attackers have exploited DoH to establish covert communication channels, making the detection of malicious activity considerably more challenging.

DoH tunneling has become a significant cybersecurity threat, enabling data exfiltration and Command and Control (C2) communication. Using encrypted DNS traffic, attackers can maintain persistent access to compromised systems while evading detection by conventional traffic analysis techniques [2]. This covert channel method poses a risk to network security, as it allows malicious actors to bypass traditional monitoring and intrusion detection systems (IDS), making identification and mitigation increasingly challenging.

A major challenge in DoH tunnel detection is the need for large-scale and diverse datasets to train accurate Machine Learning (ML) models. Traditional network security solutions, such as Deep Packet Inspection (DPI) [3], are less effective against encrypted traffic, limiting their applicability. To overcome these challenges, intrusion detection systems increasingly rely on ML techniques to classify suspicious patterns in network traffic [4]. However, training robust ML models for DoH tunnel detection typically requires centralized data collection, where DNS traffic from multiple sources is aggregated. This centralized approach raises significant privacy concerns, as entities must share sensitive DNS traffic, and it also introduces a single point of failure, making the system more vulnerable to targeted attacks.

Recently, new paradigms have emerged with the purpose of distributing the learning process, thus avoiding the localization of data in a single point and enhancing data privacy. Among them is Federated Learning [5] (FL), which allows for a collaborative and distributed training process in which each participant trains a local ML model with only its own data. Subsequently, participants share their ML models with a central server that aggregates them to compute a global model. This iterative process also presents a decentralized approach, Decentralized Federated Learning (DFL), where the presence of a central server disappears to favor scalability and robustness against failures in large, sparse, and dynamic scenarios [6].

Besides that, in certain real-world scenarios it is not common to have a complete dataset available to train an ML algorithm. In such cases, ML algorithms are trained as new samples are generated, for instance, in the context of sensing data. In addition, the distribution of this data may vary over time, as well as different contexts not originally contemplated. Incremental

D. Cajaraville-Aboy, C. Beis-Penedo, R. Díaz-Redondo, A. Fernández-Vilas, and M. Fernández-Veiga are with the atlanTTic Research Center (I&C Lab), University of Vigo, Spain (Emails: {dcajaraville,cbeis,rebeca,avilas,mveiga}@det.uvigo.es)

M. Moure-Garrido, C. Garcia-Rubio, and C. Campo are with the Department of Telematic Engineering, University Carlos III of Madrid, Spain (Emails: mamoureg@it.uc3m.es, carlos.garcia@uc3m.es, celeste@it.uc3m.es)

Corresponding author: Diego Cajaraville-Aboy.

learning [7] is a methodological framework within the field of ML that utilizes techniques on data or ML models with the objective of enabling models to learn and progressively reinforce its knowledge without losing previously acquired information. This makes it a fundamental field for processing data in online environments, such as DNS, where data arrives temporally in sequential order and ML models need to be updated to improve predictions.

To overcome current limitations of ML schemes for DoH tunnel detection, we propose CO-DEFEND, an incremental-based DFL framework that enables multiple entities to collaboratively train a classification model while preserving data privacy and improving resilience against single points of failure. This approach ensures that incoming DoH traffic data remains localized, reducing the risk of data exposure while maintaining detection effectiveness. Our contributions can be summarized as follows:

- We introduce a novel incremental-based DFL scenario that allows multiple entities to collaboratively train a DoH malicious traffic detection model, while maintaining data privacy and system robustness.
- We propose the use of classical lightweight ML algorithms, Support Vector Machines (SVM), Logistic Regression (LR), Decision Trees (DT), and Random Forest (RF), for the detection of malicious traffic of the processed DoH flows, as well as their adaptation to federated training scenarios.
- We compare different non-federated, centralized and decentralized federated learning scenarios to assess their effectiveness in DoH tunnel detection, focusing on the trade-offs between communication and computational overhead due to the collaborative training.
- We employ and adapt a state-of-the-art simulation tool for the implementation of the validation scenarios, as well as the use of libraries for the adaptation of the mentioned ML algorithms for their incremental approach.
- We compare our proposed method with existing centralized and FL approaches in the literature, demonstrating that it achieves comparable results in detecting malicious DoH tunnels while providing benefits of enhanced data privacy and cost reduction.

The remainder of the paper is organized as follows: Section II presents an overview of the fundamental concepts and methodologies relevant to this study. Section III provides a review of the state of the art related to DoH tunnel detection, FL frameworks, and incremental learning. The proposed DFL scenario, methodology, and the definition of the collaborative training of the chosen ML algorithms are detailed in Section IV. Section V presents the experimental setup of the validation scenarios, and Section VI contains the evaluation and discussion of the obtained results. Finally, Section VII summarizes the conclusions drawn from our findings and outlines some directions for future research.

## II. BACKGROUND

This section provides a concise overview of the key concepts and methodologies underpinning this study, including DNS security challenges, federated learning (and its decentralized variant), and incremental learning. We begin by examining the security challenges associated with the DoH communication protocol, focusing on its potential misuse for covert communication. Next, we introduce FL framework and its extension to DFL, emphasizing their advantages in privacy-preserving network security applications. Additionally, we explore incremental learning, a technique that enables models to continuously adapt to evolving attack patterns.

### A. DNS Security Threat

DNS [8] is a fundamental protocol in pervasive communications, facilitating various functionalities, including service discovery and name resolution. However, the DNS protocol can be exploited as a tunneling mechanism, posing a significant security threat to ubiquitous networks [9].

DNS tunneling exploits the DNS protocol to encapsulate other protocols and transmit data, often bypassing network restrictions for malicious purposes. A DNS tunnel enables bidirectional communication between a client and a server by encapsulating data within DNS packets. As shown in Figure 1, the process involves configuring a malicious DNS server, embedding data within DNS queries, and transmitting them to the attacker's server. Once received, the server decodes the data, enabling activities such as data exfiltration, command execution, or network reconnaissance.

The covert nature of DNS tunneling poses a significant threat to cyber-physical systems (CPS), as attackers leverage this method to stealthily extract sensitive information or transmit malicious commands. By evading traditional IDS, including behavioral analysis techniques, these attacks compromise the security and integrity of network systems.

One method for detecting DNS tunnels involves analyzing the content of DNS traffic. However, with the introduction of DoH [1], new challenges have emerged due to the encryption of DNS queries, which limits deep packet inspection. While DoH mitigates certain security vulnerabilities in traditional DNS [10], it also renders conventional detection techniques obsolete, as encryption prevents direct content analysis of DNS traffic [2].

Discovered in 2019, the Godlua Backdoor [11] was the first known malware to utilize DoH as a covert communication channel, enabling the concealment of malicious traffic within DNS queries. In 2020, APT34 [12] became the first documented Advanced Persistent Threat (APT) group to leverage DoH specifically for data exfiltration, marking a significant advancement in cyber attack methodologies.

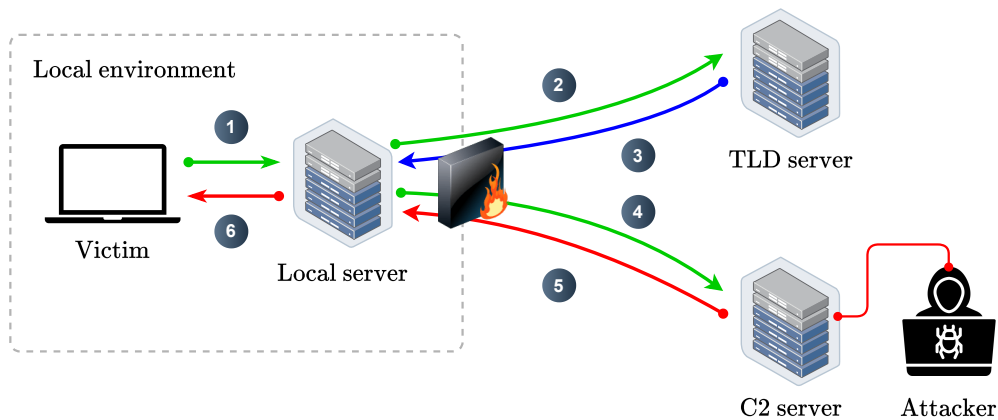


Fig. 1. Diagram of the different stages of DNS tunnels functionality

Various tools are available for generating DoH tunnels, facilitating the transmission of malicious traffic within DoH connections [13]. The primary function of these tools is to establish covert data tunnels, enabling traffic to be encapsulated within DNS queries and transmitted over HTTPS. Additionally, some tools allow attackers to create DoH tunnels by operating a DoH proxy. Notable examples of such tools include Iodine [14], dns2tcp [15], and dnscat2 [16].

### B. (Decentralized) Federated Learning

FL framework [5] has emerged in recent years as an alternative to classical ML, in which training data is aggregated in a central server. Motivated by the emergence of paradigms such as the Internet of Things (IoT) or computing approaches such as cloud-continuum [17], the classical centralized FL (CFL) consists of collaborative training of an ML algorithm, where each client trains its local model with its own dataset. Then, when the clients finish this training, the local models are sent to a central server, which is responsible for aggregating them into a single global model (which is sent back to the clients). The federation process is iterative, repeating the above process over a series of rounds starting with the global model from the previous round.

Although FL has great advantages as a result of learning without sharing data, which increases privacy by not sending data to a processing point and saves bandwidth, it still has several drawbacks [18], [19]. These are frequently discussed in the literature and include both security and privacy issues, as well as global model inversion [20], membership attacks [21], Byzantine attacks by malicious nodes [22], [23], dealing with delays due to straggler devices [24], among others, which are often mitigated through countermeasures like differential privacy [25] and coded computing.

Recently, a new paradigm called DFL [26] has emerged as a new approach to the centralized version. In DFL, the central server responsible for model aggregation disappears and delegates this procedure to some clients in the learning network. Now, the clients share their local model with other clients in the network (usually with similar characteristics), resulting in different topologies. This approach provides a more robust scheme against single-point failures and more scalable because it does not depend on the central server. DFL also has a number of drawbacks that have received attention in the literature, such as increased model communication overhead [27], which is usually mitigated by lightweight communication protocols, e.g., Gossip [28]. Security challenges are also present (even to a greater extent than in CFL) in DFL, as malicious nodes can manipulate the learning process. To mitigate these threats, researchers proposed different Byzantine-robust aggregation techniques [29].

### C. Incremental Learning

Compared to traditional ML, incremental learning [30] can continuously acquire new knowledge with new data, while retaining most of the previously trained knowledge. Maintaining the trade-off between integrating new information and preserving prior knowledge is a challenge known as the “stability-plasticity dilemma”, where stability refers to not forgetting previously learned patterns and plasticity refers to adapting to new data.

This capability becomes very important in dynamic environments where data reception is sequential and not fully available at any given time, such as real-time applications, IoT systems, or collaborative learning frameworks [31]. This approach reduces computational and storage costs, making it scalable for large-scale applications or devices with limited resources.

Incremental learning faces several challenges, including catastrophic forgetting [32] (loss of previously acquired knowledge) and concept drift [33] (the distribution of received data differs from previous ones). To overcome these challenges, there are

TABLE I  
RELATED WORKS OF DoH TUNNEL DETECTION.

Reference	Year	# features	ML	Accuracy
[4]	2020	28	RF	99.9%
[36]	2020	34	LightGBM, XGBoost	100%
[37]	2020	31	RF, GB	100%
[38]	2021	27	LightGBM	100%
[39]	2021	31	XGBoost, RF	99.22%
[40]	2021	-	DeepFM	99.5%
[41]	2022	29	RF	99.98%
[42]	2023	6	Adaboost	100%
[43]	2023	-	RF, DT	99.99%
[44]	2023	28	CatBoost	99.9%
[45]	2024	4	LR	95.35%

some techniques such as regularization [34] (penalizing significant changes) or replay mechanisms [35] (mixing new batches with representative old data).

Previously explained concepts serve as the foundation for our proposed framework, which leverages DFL and incremental learning to enhance the detection of malicious DoH tunnels while ensuring scalability, data privacy and online deployment.

### III. RELATED WORK

This section provides an overview of existing research on DoH tunnel detection, as well as the application of federated and incremental learning in network analysis.

#### A. DNS Tunnels

In recent years, the focus on privacy has intensified as a result of concerns about data security and user privacy. The detection of malicious DoH tunnels attracted considerable attention, driven by the growing threat of encrypted DNS traffic exploited for covert communications. The enhanced confidentiality and integrity of DNS queries alone do not suffice to mitigate all security risks. Research challenges for DoH abuse are presented in [9].

The papers in Table I focus on DoH tunnel detection using various ML techniques, all of which utilize the ‘‘CIRA-CIC-DoHBrw-2020’’ dataset by MontazeriShatoori et al. [4].

The studies on DoH tunnel detection employ a variety of machine learning algorithms. Banadaki [36], Behnke et al. [38], and Alenezi and Ludwig [39] use LightGB and XGBoost, while MontazeriShatoori et al. [4], Singh and Roy [37], Zebin et al. [41] and Alzighaibi [43] achieve high accuracy with RF.

Several works also incorporate feature selection techniques [45], improving accuracy by removing irrelevant features [38] and using correlation-based feature analysis [40]. Additionally, Abu et al. [42] leverage Principal Component Analysis (PCA) for feature selection to enhance their Adaboost classifier’s performance.

Niktabe et al. [46] applied interpretability models to identify patterns in malicious traffic associated with DoH tunnels. In another study, the same authors [45] analyzed malicious DoH traffic and proposed an approach that incorporates feature selection, achieving an accuracy of 95.35% using LR.

#### B. Incremental ML in Federated Scenarios

Much of the existing literature on FL has primarily focused on training deep neural networks, particularly Convolutional Neural Networks (CNN). This focus was due to their proven effectiveness in processing large volumes of data and capturing complex patterns; however, their application is not always necessary to achieve satisfactory performance in all scenarios. In contrast, simpler algorithms such as SVM and DT can often achieve comparable results at a lower computational cost, making them more suitable for resource-constrained applications. These algorithms received comparatively less attention in FL research, with existing studies largely providing a theoretical framework for their adaptation to federated environments [47], [48], rather than a realistic, practical implementation that could be empirically validated. In this paper, we address the adaptation of several well-known ML algorithms to FL scenarios and evaluate their performance in the distributed DoH traffic analysis environment.

On the other hand, few studies explored the compatibility and synergies between approaches such as FL and incremental learning. In [49], it is proposed a decentralized and collaborative machine learning framework for low-resource IoT devices, through the combination of federated and incremental learning. It provides an incremental prototype-based learning algorithm with random-based model exchange protocols and novel prediction and prototype generation methods, demonstrating superior training efficiency compared to centralized counterparts.

Work [50] proposed a novel FL-based intrusion detection system framework that addresses the same problem in dynamic network environments. In this case, by introducing a class gradient balance loss and a sample label smoothing loss, the framework enhances the memory of old classes while maintaining the detection effectiveness for new classes.

### C. Federated Learning for Traffic Network Analysis

Several studies have been conducted on the incorporation of FL techniques in various domains, such as health, finance, smart grid, industrial automation, and IIoT [51]–[54]. Through this approach, it is possible to train ML algorithms collaboratively, guaranteeing the privacy of sensitive information and demonstrating their effectiveness in disease prediction, financial data analysis, or industrial process improvement. However, in comparison, its application to the analysis and detection of malicious traffic in DoH requests has not been widely explored, despite its importance for security in various applications.

Some previous works used FL in the context of network traffic analysis, primarily in network traffic anomaly detection. Doriguzzi et al. [55] proposed FLAD (adaptive FL Approach to DDoS attack detection), an approach that optimizes the FL process in cybersecurity by assigning more computing resources to participants with harder-to-learn attack profiles. This enabled constant model refinement while keeping test data private and maximizing both convergence and accuracy for DDoS attack detection. In [56], the authors introduced MT-DNN-FL, which enhanced the FL framework by incorporating a multi-task deep neural network. This approach simultaneously detected network anomalies, identified VPN (Tor) traffic, and classified network traffic, alleviating the data limitation problem while reducing the training burden.

For the particular case of DoH traffic, the existing approaches are limited. Recently, researchers started exploring FL scenarios for DoH tunnel detection. Li et al. [57] presented a classifier to detect DoH tunnels using FL to train a CNN. However, ensuring the robustness of these models remains challenging, and there is a lack of studies that effectively address these issues.

Within the research field of FL, the DFL variant received less attention compared to the classical centralized version, despite its advantages in terms of robustness and scalability. The fact that nodes work more autonomously and share knowledge with each other without intermediaries makes this paradigm much more suitable for areas such as Flying Ad-Hoc Networks (FANETs), vehicular scenarios, Industry 4.0, and blockchain, among others [58]. For example, Pokhrel et al. [59] proposed an autonomous blockchain-based FL design for privacy-aware vehicular communication, where on-vehicle machine learning updates were decentralized and verified using blockchain. However, to the best of our knowledge, no studies have explored the use of the DFL paradigm for network traffic analysis.

In this study, we bridge the gap in DFL applications for encrypted traffic analysis by proposing a framework tailored to the unique challenges of DoH tunnel detection. While prior (e.g., [55]–[57]) works demonstrated the potential of FL in network security, their focus has largely been on centralized architectures or non-encrypted traffic scenarios. Our framework combines incremental learning with decentralized federated updates, enabling adaptive anomaly detection in encrypted network environments. Following sections detail our methodology, experimental validation, and comparative analysis, demonstrating how decentralized federated updates with incremental learning overcome these challenges without sacrificing detection accuracy.

## IV. METHODOLOGY

This section details the configuration of our federation scenario, including the selection and adaptation of the learning algorithms employed by the participating entities. We also describe the technical aspects of distributed federated and incremental learning that enable effective model training in a decentralized environment.

### A. System Configuration

We consider a distributed learning scenario involving multiple entities (i.e. a cross-silo scenario), each utilizing different DNS provider and collaborating to detect malicious DoH tunnels. Since DNS queries are encrypted in DoH, deep inspection of the packet is not feasible; instead, intrusion detection relies on traffic pattern analysis. Each entity deploys an IDS with the primary objective of identifying intrusions through network traffic analysis and detecting malicious DoH tunnels. For this purpose, we employ a DFL approach for collaboratively training a classification ML algorithm. This approach has three main objectives: (i) to strengthen the learning process by using data from different DNS providers; (ii) to avoid data privacy issues by not having to centralize the data location; and (iii) to avoid single point failure issues by not centralizing the federation process. Also, our framework is incremental, with local models continuously updated as new data arrive to each entity, thereby adapting to evolving attack patterns.

Figure 2 illustrates the proposed scenario, depicting the entities participating in the collaborative learning network, each utilizing different DNS providers. The diagram highlights the key components involved in the DFL process, demonstrating how entities contribute to model training.

The topology of the DFL scenario is modeled as a static undirected graph  $G = (\mathcal{V}, \mathcal{E})$  where  $\mathcal{V}$  represents the nodes participating in the learning process as vertices, which are interconnected by the set of links  $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$ . Specifically, this is a peer-to-peer (P2P) topology, where each of the entities in the network can communicate with any other entity (motivated by the cross-silo nature of the scenario).

In each round of the federation process (hereinafter the terms round and federation round are used interchangeably), every node performs the following steps (summarized in Figure 3): (i) trains its local model using the data available in that round; (ii) shares its trained model parameters with peer nodes; and (iii) aggregates the received model parameters using a predefined aggregation algorithm.

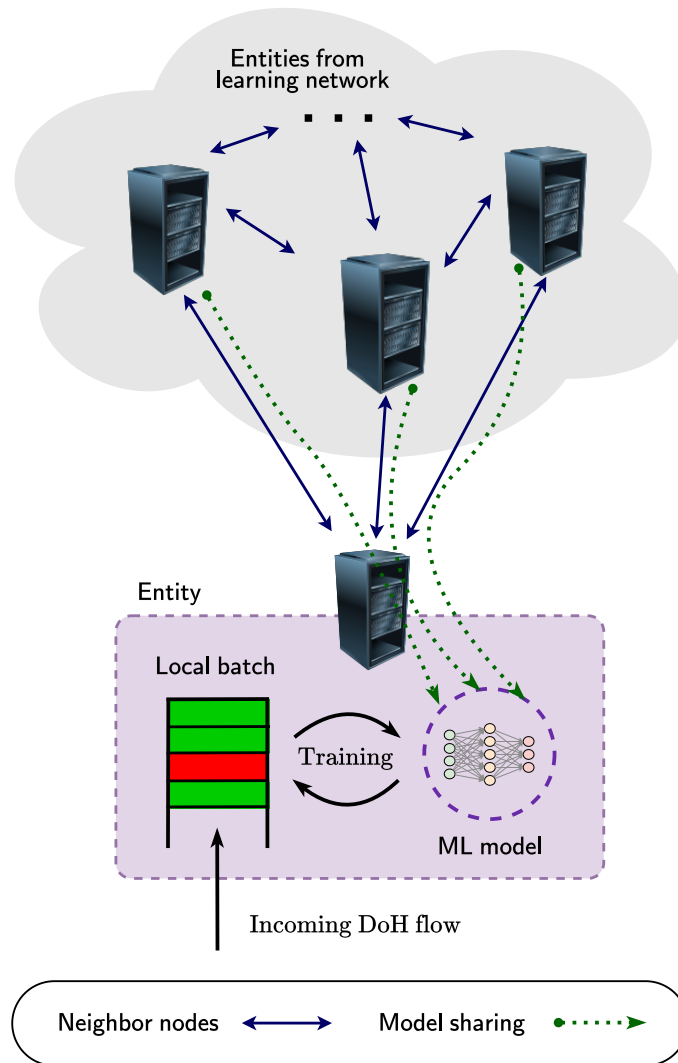


Fig. 2. Decentralized Federated Learning framework scenario

**Data training:** Traditional FL typically assumes that each node trains on a static and pre-collected local dataset. In contrast, in a real-world scenario, network traffic arrives continuously, and the local dataset is constantly updated. To reflect this, our incremental FL approach processes incoming DoH flows in sequential batches. Each node uses the flows received between consecutive rounds as a new batch to update its local model. This mechanism enables the framework to adapt dynamically to emerging malicious DoH tunnel patterns, addressing the challenge that a model trained on past data may quickly become obsolete.

**Model parameters sharing:** During each federation round, each entity randomly selects a peer from the P2P network. It shares its trained model parameters using the Gossip communication protocol [60]. This protocol is widely known for its efficiency in the rapid dissemination of information over large networks as well as for its convergence capability. One of its main benefits is the reduction of the bandwidth consumption, as it avoids sharing information with all nodes in the network.

**Aggregation process:** Various aggregation techniques can be employed within the DFL framework, including statistical averaging [61], robust aggregation methods [62], and ad hoc methods for non-parametric models such as DT [47]. The following subsection details the ML algorithms selected for collaborative learning and the model parameter aggregation process for each of them.

### B. ML Algorithms for Federated Environments

Based on previous studies [63], this work considers the following machine learning algorithms: SVM, LR, DT, and RF. Although deep neural networks have been prominent in FL research, these models offer comparable detection performance while enabling faster incremental updates and reduced communication overhead. We define the ML models, focusing on the description of their adaptation for federated settings. The adaptations required for the incremental approach of ML algorithms are described in detail in Section V.

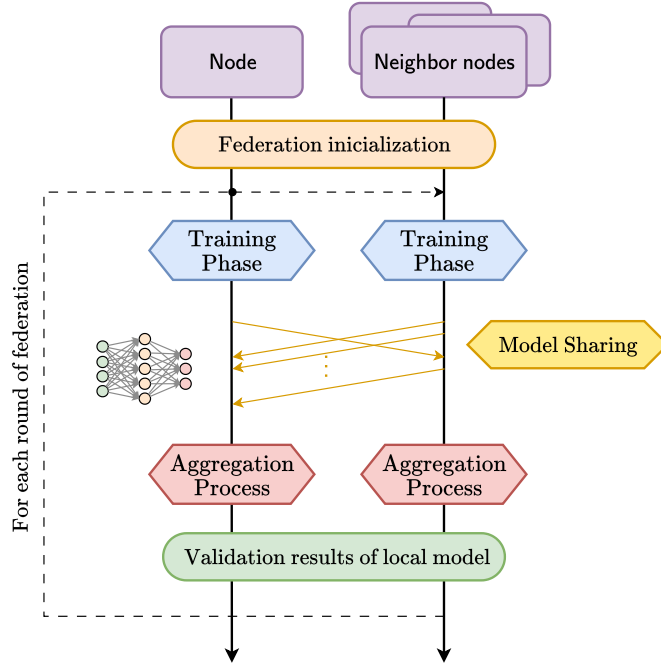


Fig. 3. Flowchart of the DFL process in the learning scenario

1) *Support Vector Machine*: SVM is a supervised ML algorithm primarily used for classification tasks [64]. Its main objective is to find the optimal hyperplane

$$\begin{aligned} \mathcal{S} &= \{ \mathbf{x} \in \mathbb{R}^n : \mathbf{w}^T \mathbf{x} + b = 0 \}, \\ \mathbf{w} &= (\alpha_1, \dots, \alpha_n)^T, \end{aligned} \quad (1)$$

that maximizes the margin between two classes in a  $n$ -multidimensional feature space. This margin is defined as the Euclidean distance between the hyperplane and the nearest data points from each class, known as support vectors.

In binary classification, SVM focuses on finding a single hyperplane, which can be characterized by its model parameters  $(\alpha_1, \dots, \alpha_n, b)$ , depending on the number of features  $n$ . Therefore, in a FL scenario, entities only share these parameters with their participants. For the aggregation process, each node (or a central server, if applicable) applies statistical methods to derive a single hyperplane from local updates, such as computing the coordinate-wise mean.

2) *Logistic Regression*: LR is also a supervised ML algorithm primarily used for binary classification, though it can be extended to multi-class problems [65]. It is based on maximum likelihood estimation (MLE), modeling the probability that a given input belongs to a particular class. It estimates the parameters of the logistic function (also called the sigmoid function):

$$\mathbb{P}[y = 1|\mathbf{x}] = \sigma(\mathbf{z}) = \frac{1}{1 + \exp(-\mathbf{z})}, \quad \mathbf{z} = \mathbf{w}^T \mathbf{x} + b, \quad (2)$$

where  $\mathbf{z}$  is a linear representation of the features depending on the coefficients  $\mathbf{w} = (\beta_1, \dots, \beta_n)$ , in order to maximize the likelihood of observing the given data.

In order to model the probability of one class relative to the other in a collaborative manner, the shared model parameters are the feature coefficients and the bias term  $(\beta_1, \dots, \beta_n, b)$ . Aggregation methods, such as averaging, are used to combine the parameters from different entities.

3) *Decision Trees*: DTs are non-parametric supervised learning models that recursively partition the feature space through axis-aligned splits by selecting feature thresholds that maximize a node purity metric (e.g., information gain or Gini impurity) [66], [67]. We employ the Hoeffding Tree algorithm as described in [68] to support online, incremental learning from streaming data. Hoeffding Tree is an incremental, anytime decision tree induction algorithm that is capable of learning from massive data streams, assuming that the distribution generating examples does not change over time. It exploits the fact that a small sample can often be enough to choose an optimal splitting attribute. Hoeffding Trees guarantee asymptotic equivalence to batch-trained trees under the Hoeffding bound

$$\epsilon = \sqrt{\frac{R^2 \log(1/\delta)}{2N}}, \quad (3)$$

where  $R$  is the range of observer values,  $\delta$  represents the split confidence parameter and  $N$  the number of observed samples at a node. Each tree  $T$  maintains a set of splitting rules  $\{\phi_1, \dots, \phi_m\}$  where

$$\phi_i = (f_i, \tau_i, \mathcal{L}_i, \mathcal{R}_i), \quad (4)$$

with  $f_j$  denoting the splitting feature,  $\tau_j$  the threshold value, and  $\mathcal{L}_j, \mathcal{R}_j$  the left/right child nodes. Each node (representing a distinct entity) trains its local Hoeffding Tree on its respective data stream, leading to heterogeneous tree structures in terms of depth, split criteria, and leaf distributions.

Given the structural diversity among locally trained trees, conventional parameter-level aggregation (e.g., averaging) is impractical. Previous works have explored methods for aggregating decision trees in FL, such as model selection or decision rule voting [47], [69]. Instead, the nodes share their trees and associated parameters with each other, forming a pool of candidate models. Specifically, each node compiles a set of candidate trees that includes its own local Hoeffding Tree and those received from peer nodes. Using a dedicated validation set, each tree candidate is then evaluated by computing its prediction accuracy. The candidate with the highest accuracy is selected as the aggregated model for that node, ensuring that only the best-performing models propagate across the decentralized network, defining the accuracy as

$$\frac{1}{N} \sum_{i=1}^N \mathbb{I}\{T(\mathbf{x}_i) = y_i\}, \quad (5)$$

where  $\mathbf{x}_i$  and  $y_i$  denote the validation features and labels, respectively. Here,  $T(\cdot)$  represents the prediction function of the candidate tree (i.e., it outputs the predicted class for a given input  $\mathbf{x}_i$ ), and  $\mathbb{I}\{\cdot\}$  is the indicator function, which returns 1 if the condition inside is true (that is, if the predicted class equals the actual label  $y_i$ ) and 0 otherwise.

The candidate achieving the highest accuracy on the validation batch is then selected as the updated local model. This aggregation mechanism ensures that, despite the underlying heterogeneity, the most effective decision boundaries propagate across the decentralized network.

4) *Random Forest*: RF [70] is an ensemble learning method that constructs multiple decision trees and aggregates their predictions to improve overall accuracy and robustness. It builds an ensemble of decision trees by training each on a bootstrapped sample of the data and employing random feature selection at each split. For an input  $\mathbf{x} \in \mathbb{R}^n$ , the ensemble prediction is determined by majority vote:

$$\hat{y} = \text{mode}\{T_1(\mathbf{x}), T_2(\mathbf{x}), \dots, T_N(\mathbf{x})\}, \quad (6)$$

To enable collaborative training associated with a DFL scenario, we implement an aggregation and pruning strategy, similar to approaches studied in federated random forest models [71], [72]. In each round, nodes exchange their locally trained trees, and each node aggregates the received trees with its own ensemble. This flattened ensemble is evaluated on a validation set. For each tree, the prediction accuracy is computed as described above.

Subsequently, the forest is pruned by keeping only the top performing trees (up to a limited amount), making the aggregated model maintain high predictive performance and being able to generalize across the varied data distributions inherent to each node. This pruning strategy aligns with findings in previous federated RF research, which indicate that selectively retaining the most generalizable trees enhances robustness and prevents model overfitting [69], [71].

## V. EXPERIMENTAL SETUP

In this section, we detail the experimental setup and the various scenarios used to evaluate the proposed DFL framework. We also describe the considered dataset for validation and the software implementation used for the simulations.

### A. Dataset

The dataset used in this study is CIRA-CIC-DoHBrw-2020 [4], which was collected using a purpose-built traffic-capturing infrastructure designed to generate both benign and malicious DoH traffic. The corresponding benign traffic was generated by browsing the top 10,000 Alexa-ranked websites using Google Chrome and Mozilla Firefox, both supporting DoH. In contrast, malicious DoH traffic is generated using DNS tunneling tools such as dns2tcp [15], DNSCat2 [16], and Iodine [14], which encapsulate data within DNS queries to create encrypted data tunnels. To ensure a comprehensive evaluation of DoH servers, authors used the following four providers: AdGuard, Cloudflare, Google, and Quad9.

The dataset consists of statistical features derived from the captured traffic, which were extracted using a tool called DoHlyzer, developed by the authors. The proposed tool groups DoH packets into flows, where a DoH flow is defined as a sequence of one or more packets that have the same source and destination. The distinction of a DoH flow is the time constraint between packets: there is a defined maximum time interval that can elapse between two packets within a flow. DoHlyzer extracts 28 statistical and time-series features from the captured traffic and outputs them, along with flow duration, IP addresses, ports, and initial timestamp, in a CSV file, as detailed in [4]. Additionally, it also includes a label indicating whether the traffic is benign or malicious. As a result, the dataset comprises 34 features along with the corresponding label.



TABLE II  
NUMBER OF FLOWS AND THEIR MALICIOUS/BENIGN DISTRIBUTION

Entity	DNS Provider	Total Size	Malicious	Benign
1	GoogleDNS	53,586	41,574	12,012
2	Cloudflare	31,226	29,346	1,880
3	AdGuard	25,144	22,224	2,920
4	Quad9	159,687	156,692	2,995

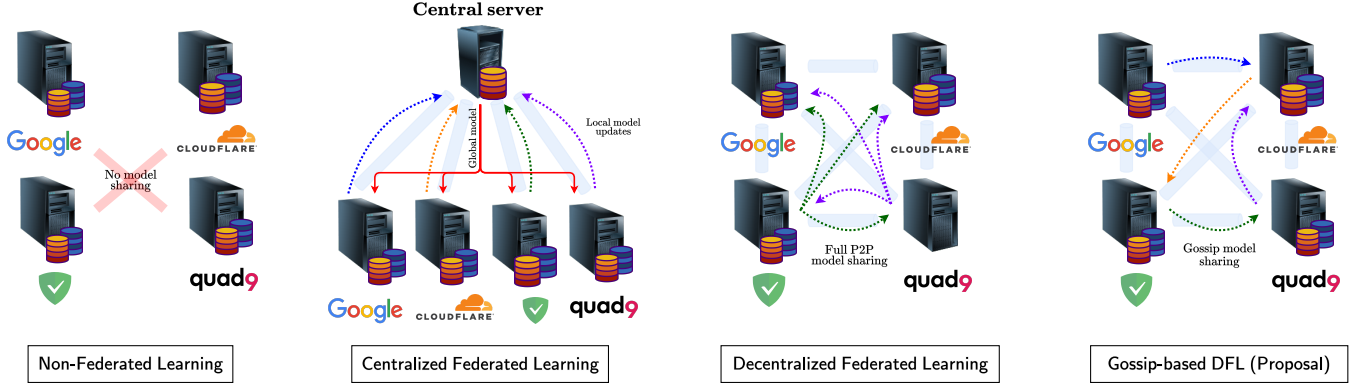


Fig. 4. Description of the four evaluation scenarios for collaborative training between entities with different DNS providers: non-federated learning, centralized federated learning, decentralized federated learning and Gossip-based decentralized federated learning. In all scenarios, both nodes and central server, the ML model validation sets contain the same samples.

**Dataset Distribution:** To evaluate a federated environment, we aim to simulate DNS traffic from different entities. While this could be achieved by randomly partitioning the dataset, as done by Li et al. in [57], we adopt an alternative approach to ensure that each entity’s traffic exhibits distinct characteristics. Specifically, we simulate a scenario in which each entity utilizes a different DNS provider, ensuring a more realistic scenario where traffic distribution varies between entities. We segment the traffic by DNS provider based on IP addresses, enabling evaluation per provider. Table II summarizes the flow distribution across providers. As can be observed, the traffic is unbalanced and the number of malicious flows is significantly higher than the number of benign flows.

**Training/Validation segmentation:** Prior to distributing the dataset to each entity, we selected a random 10% of the total samples as a global validation set containing benign samples and attack patterns belonging to each entity. This validation set is used by all entities (or the central server, if applicable) to evaluate each of the local models under the same conditions and observe whether the local models generalize for different attack patterns. This criterion is used for system validation purposes only. The remaining dataset is divided by IP addresses between each of the entities as described above. In each of these entities, another 10% of the samples of the local dataset is selected for a local validation of the own models and to check if they better detect attacks performed on the entity itself. Finally, the remaining samples are used to train each local model of the entities and are packaged in batches for training in each of the federation rounds. The proportion of benign/malicious samples in each of the batches is in accordance with the proportion shown in each entity’s trainset.

**Feature Selection:** PCA is used in this study to reduce the dimensionality of the feature space and address challenges associated with high-dimensional data. By reducing the number of features, PCA not only improves computational efficiency but also enhances model performance by focusing on the most informative aspects of the data while eliminating redundant or less relevant features. Moreover, PCA helps mitigate the risk of overfitting, as it simplifies the model without compromising its ability to generalize. It also reduces the risk of pattern imitation by adversaries, which strengthens the model against evasion techniques. As shown in previous studies [73], there are certain features that provide sufficient information to identify patterns in malicious traffic. However, attackers can mimic these features to avoid detection. Therefore, PCA is incorporated not only to reduce dimensionality but also as a security measure, making it harder for attackers to exploit predictable patterns.

### B. Definition of Validation Scenarios

To evaluate the effectiveness of our approach, we consider four different training scenarios (summarized in Figure 4) that cover both centralized and decentralized learning paradigms:

- **Non-Federated Learning (Baseline):** Each node trains a local model using only its own local data, with no collaboration between nodes, i.e. no model parameters are exchanged in this scenario. This represents a conventional centralized approach *per node* (no federation) and serves as a baseline to see how well an individual node can detect attacks in isolation.
- **Centralized Federated Learning:** Each node participates in a standard FL setup with a central server (aggregator). In each round, nodes train local models on their respective data and send the model parameters to the central server. The

server aggregates these models (e.g., by averaging parameters for SVM/LR or selecting decision trees as described in Section IV) into a single global model, which is then broadcast back to all nodes for the next round. This scenario is equivalent to the classical CFL framework and allows us to compare decentralized vs. centralized aggregation.

- **Decentralized Federated Learning:** The nodes collaborate in a P2P network without any central coordinator. Each node communicates directly with others to share model updates. In our implementation, during each round every node exchanges model parameters with all other peers (fully connected topology). Each node then aggregates updates from peers locally. This yields a global consensus model over time, but achieved via distributed agreement. The DFL scenario tests robustness to the removal of the central aggregator, potentially improving fault tolerance and decentralization at the cost of more complex communication.
- **Gossip-based DFL (Proposal):** A modified decentralized scenario where model sharing is based on a randomized Gossip protocol. In each round, instead of broadcasting to all peers, each node randomly selects one peer and exchanges its model with that peer. These pairwise exchanges are randomized each round, and over many rounds the updates propagate through the network (Gossip ensures eventual consistency). This approach significantly reduces communication overhead per round while still allowing the federation to reach a common model. The Gossip-based DFL scenario is more scalable to large networks.

All scenarios are evaluated under identical experimental conditions, including the same data partitioning, learning models, and simulation parameters. The FL process is conducted over 20 rounds. The batch size in all entities is 153 samples. This is the number of samples available to AdGuard (the provider with the lowest number of samples) in each of the rounds if the train set allocation is equal in each round. Due to the disparity in the number of samples between entities, this allocation of samples in batches is done to ensure a fair comparison in each of the rounds.

By comparing these scenarios, we can assess how a fully centralized approach, a conventional federated approach (CFL), and our decentralized approaches (DFL with full sharing vs. DFL with gossip) perform relative to each other in detecting malicious DoH tunnels.

### C. Performance Metrics

To measure the detection performance of each model, we use four standard classification metrics: accuracy, precision, recall, and F1-score [74]. These metrics are computed from the counts of true positives, false positives, true negatives, and false negatives obtained on the test data. We briefly define each metric below (TP = True Positives, FP = False Positives, TN = True Negatives, FN = False Negatives):

- **Accuracy** is the fraction of all queries that are correctly classified:

$$A = \frac{TP + TN}{TP + TN + FP + FN} \quad (7)$$

- **Precision** (Positive Predictive Value) is the proportion of predicted malicious queries that are truly malicious:

$$P = \frac{TP}{TP + FP} \quad (8)$$

- **Recall** (True Positive Rate) is the proportion of actual malicious queries that are correctly detected:

$$R = \frac{TP}{TP + FN} \quad (9)$$

- **F1-score** is the harmonic mean of precision and recall:

$$F1 = \frac{2 \times TP}{2 \times TP + FP + FN} = 2 \times \frac{P \times R}{P + R} \quad (10)$$

These metrics provide a comprehensive evaluation of model performance. Accuracy gives an overall correctness rate, precision reflects how reliable the model's positive (malicious) predictions are (low false-alarm rate if precision is high), recall indicates the model's ability to catch malicious instances (coverage of true attacks), and F1 balances the two, which is useful if there is an imbalance between benign and malicious classes. In the context of our problem, precision corresponds to how many of the detected malicious DoH flows were actually malicious (for avoiding false alarms), while recall corresponds to how many of the actual malicious flows we managed to detect (for security coverage).

### D. Software Implementation

A distributed computing platform is required to deploy the DFL process. After reviewing state-of-the-art simulation tools [58], [75], we selected the open-source simulator<sup>1</sup> developed in [29]. It is an open-source simulator developed in Python for the execution of tests in the DFL framework, although it allows configuring CFL scenarios and distributed non-collaborative

<sup>1</sup>Code is available online:  
<https://gitlab.com/compromise3/decentralizedfedsim>

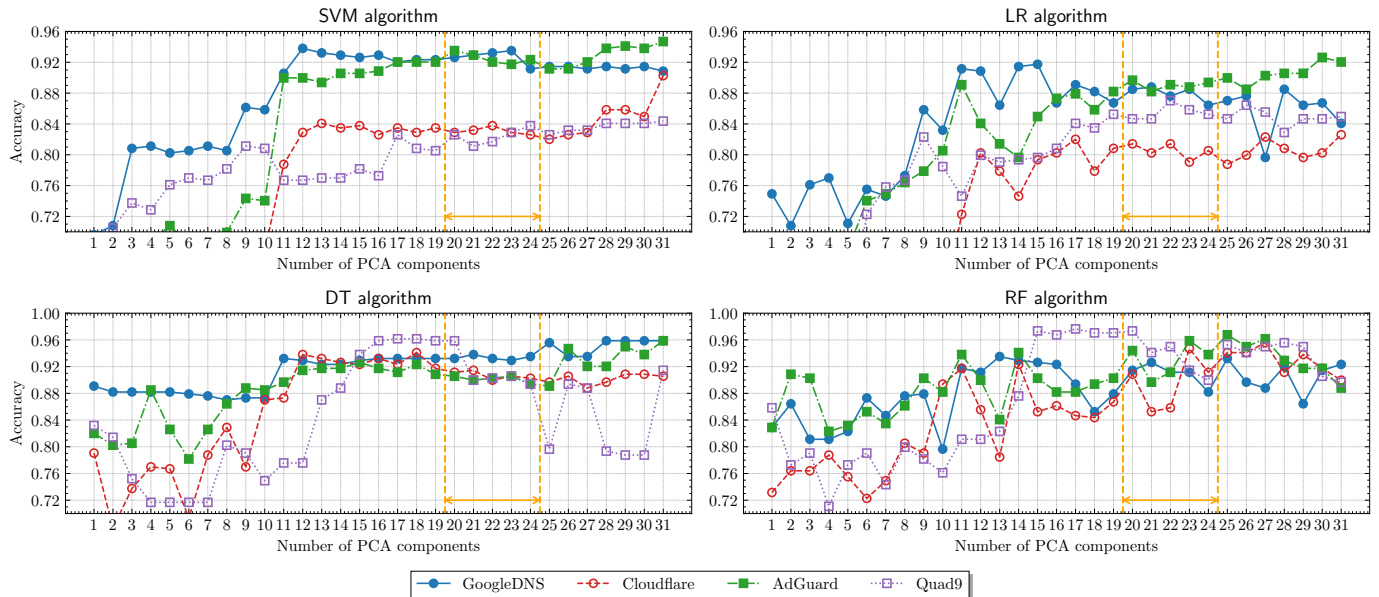


Fig. 5. Sweep of the number of PCA components of the accuracy in a full-DFL scenario with 10 rounds

scenarios. Furthermore, this simulator has been designed to be scalable, allowing the inclusion of ad-hoc code for training algorithms or distributed dataset processing without requiring a focus on the DFL process itself. The adaptation of the simulator for the validation of our methodology is also open-source<sup>2</sup>, and the specific changes made are specified below.

For this purpose, several classes/functions have been developed to implement data collection, preprocessing, and distribution, as detailed in this section, as well as the ML models chosen for the classification of traffic flows.

For the implementation of these models, the Python library `sklearn` has been used, which provides the necessary tools for the SVM and LR algorithms, including support for incremental training of the samples through the means of the `SGDClassifier` class. The RF and DT algorithms have been adapted from the `River` library, which provides the underlying tree structures and their processing, although it does not natively support incremental training. For the trees in both RF and LR models, the `HoeffdingTreeClassifier` class is employed. Additionally, the aggregation algorithms required for the model sharing process, as detailed in Section IV, have also been implemented.

## VI. EVALUATION AND DISCUSSION

In this section, we will present the results for each scenario and discuss how the models fared according to these metrics.

Prior to the presentation of the results, a feature selection procedure is performed by using PCA, motivated by the challenges posed by high-dimensionality, the risk of overfitting, and security concerns in the federated environment (Subsection VI-A). Following the component selection study, we evaluate the performance of the various algorithms (as defined in Section IV) across the scenarios described in Section V. In this way, the results are discussed under the following criteria: (i) comparison between the validation scenarios (Subsection VI-B), and (ii) comparison between the trained algorithms and other similar works (Subsection VI-C).

### A. Feature Selection – PCA

A key aspect here is the choice of the number of PCA components needed to characterize the dataset without incurring a loss of relevant information. Therefore, we perform a study of the evolution of the accuracy of the different entities in a specific scenario. A full-DFL scheme was defined with 10 federation rounds. We conducted an exhaustive sweep of PCA components, varying the number from 1 up to the full dimensionality of the original dataset, to determine the optimal trade-off between accuracy and feature reduction. The results can be seen in Figure 5 where each of the plots shows the sweep of the number of PCA components for each of the training algorithms.

In view of the results, selecting an optimal number of PCA components that maximizes the accuracy of all entities in all ML algorithms simultaneously is practically infeasible. Our analysis reveals that performance improves markedly when the number of PCA components exceeds 10, although beyond this threshold, the improvement is inconsistent due to outlier behavior in

<sup>2</sup>Code is available online:  
<https://gitlab.com/compromise3/co-defend>

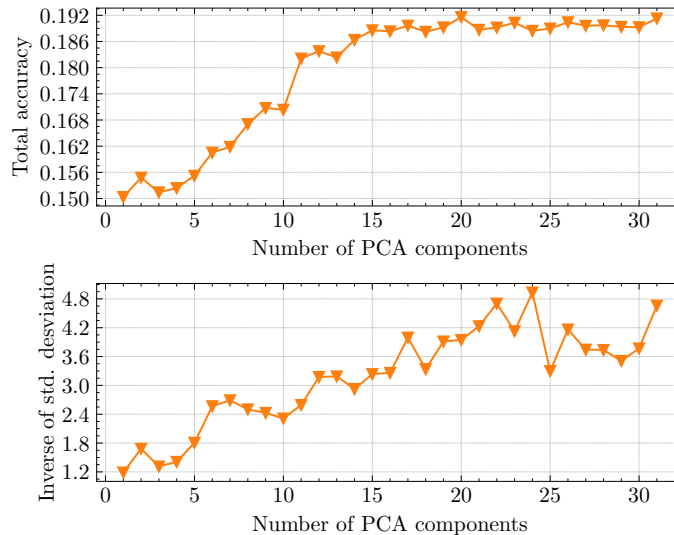


Fig. 6. Statistics resulting from the PCA components analysis

certain entities (e.g., Quad9 for DT, GoogleDNS for LR). In general, most cases show good results in the range of 20 – 24 PCA components (as it is shown).

The final selection was decided based on two criteria: (i) the total accuracy of all the scenarios be as high as possible; and (ii) the variability between the results of each entity be as low as possible (avoiding very good results in some entities, and low in others). These normalized results can be seen in Figure 6, where the best results, simultaneously, are found in 22 and 24 components. We ultimately selected 22 PCA components, as this configuration maximized the overall accuracy across scenarios while minimizing inter-entity variability, with only a minor trade-off observed for RF performance.

### B. Validation scenarios comparison

Figure 7 presents the final accuracy values achieved by each DNS entity after 20 rounds, illustrating the performance under different validation scenarios and across various ML algorithms. Based on these results, it can be clearly observed how the federation process in any of its forms provides a positive result in all possible scenario-algorithm combinations. Notably, for entities such as GoogleDNS and Cloudflare, tree-based algorithms (DT and RF) exhibit substantial improvements when federation is applied; for example, the RF model’s accuracy more than doubles compared to local training. Using a global testset to validate the models, it is observed how the distributed collaboration process allows the entities to learn about attack patterns that were previously unknown to them (since they did not have such data).

On the other hand, the SVM and LR algorithms also experience an increase in the results obtained by introducing federation, although it is more discrete (around 3% and 14%). This analysis is similar for the AdGuard and Quad9 entities, with the difference that the tree-based algorithms already show significant results. This is predictably due to the nature of tree-based algorithms, improving generalization on unseen attack behaviors. Unlike linear models (SVM, LR), they leverage additional structural patterns. The federated process integrates other participants’ decision boundaries, resulting in more accurate classifiers.

As for the federated scenarios, the vast majority of cases show similar results among them, which requires a more refined analysis of the results. In these simulations, the CFL and DFL results are the same in all cases. This is because the aggregated models in each round are the same: in CFL, the central node computes the global model based on all contributions; in DFL, all entities receive the rest of the contributions and compute the same (global) model.

On the other hand, one might expect that the results of DFL+Gossip would be worse than those of the DFL scenario, since the federation scheme is the same, but there is less sharing of ML models between entities. Nothing could be further from the truth, the results in the latter scenario maintain the good metrics obtained in DFL in most cases, and even improve in some entities and algorithms. The network topology is fully connected, allowing each node to randomly select any other node as its gossip partner. This ensures that, over multiple rounds, model updates propagate efficiently throughout the network. This is the case of the DT algorithm, where the proposed scenario obtains the best results among those evaluated. The same case occurs with the RF algorithm, although the improvement in accuracy is almost imperceptible. Others, such as SVM, obtain similar results for practical purposes, with or without the inclusion of the Gossip protocol. As an exception, the LR algorithm is the only ML model evaluated that worsens its results with respect to the full-DFL scenario, predictably due to the lack of convergence in reducing the spread of the models.

It is important to consider not only accuracy but also the F1-score, as its significance is critical in scenarios where precision and recall must be balanced to minimize false positives and false negatives. Minimizing false positives is essential to avoid

TABLE III

ACCURACY FOR DIFFERENT DNS PROVIDERS AND VALIDATION SCENARIOS. NFL: NON-FEDERATED LEARNING; CFL: CENTRALIZED FEDERATED LEARNING; DFL: DECENTRALIZED FEDERATED LEARNING; DFL+GSP: GOSSIP-BASED DFL.

DNS Provider	SVM				LR				RF				DT			
	NFL	CFL	DFL	DFL+Gsp	NFL	CFL	DFL	DFL+Gsp	NFL	CFL	DFL	DFL+Gsp	NFL	CFL	DFL	DFL+Gsp
GoogleDNS	0.893	0.942	0.942	0.927	0.755	0.877	0.877	0.755	0.928	0.971	0.963	0.967	0.922	0.924	0.939	0.961
Cloudflare	0.900	0.942	0.942	0.935	0.815	0.877	0.877	0.898	0.478	0.971	0.963	0.967	0.537	0.924	0.939	0.965
AdGuard	0.795	0.942	0.942	0.954	0.743	0.877	0.877	0.820	0.381	0.971	0.963	0.967	0.668	0.924	0.939	0.966
Quad9	0.911	0.942	0.942	0.947	0.817	0.877	0.877	0.826	0.924	0.971	0.963	0.967	0.924	0.924	0.939	0.966

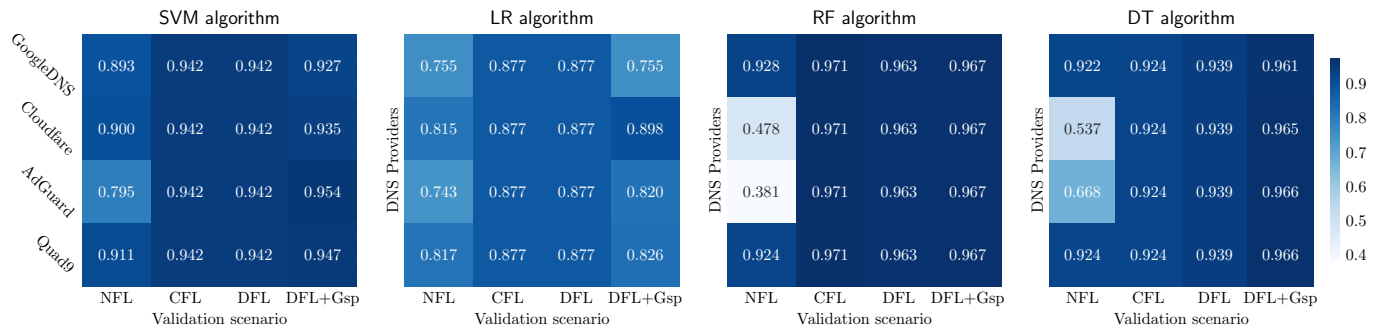


Fig. 7. Accuracy for different DNS providers and validation scenarios. NFL: Non-Federated Learning; CFL: Centralized Federated Learning; DFL: Decentralized Federated Learning; DFL+Gsp: Gossip-based DFL.

excessive alerts. Misclassifying benign DoH queries as malicious could result in the unnecessary blocking of legitimate services, leading to user access issues and potential service interruptions. Table IV collects the F1-Score values for different DNS providers and scenarios. SVM consistently achieves an F1-score of 0.969 in both DFL and CFL across all providers, matching centralized performance, while DFL+Gossip slightly improves results, reaching 0.975 for AdGuard, indicating enhanced model aggregation. Similarly, LR maintains stable performance (0.93) across all providers, outperforming centralized learning in some cases, such as GoogleDNS (0.849), with DFL+Gossip further improving generalization, particularly for Cloudflare (0.945) and Quad9 (0.898).

Tree-based algorithms (RF and DT) exhibit the most significant gains from the federation process, consistent with the accuracy results. Centralized learning for RF performs poorly in some cases (0.499 – 0.961), whereas DFL achieves consistently high F1-scores (0.98 across all providers), with DFL+Gossip further improving to 0.982. A similar trend is observed for DT, where centralized learning shows lower performance (0.672 – 0.961), while DFL and CFL provide stable results (0.967 – 0.969), with DFL+Gossip further improving to 0.982 for AdGuard and Quad9.

These results, as shown in Figure 8, underscore the significance of decentralized collaboration, especially for models like tree-based algorithms that benefit from heterogeneous decision patterns for improved performance. The significance of these F1-score improvements is critical in DoH tunnel detection, where precision and recall must be balanced to minimize false positives and false negatives. Moreover, the higher performance of DFL+Gossip compared to standard DFL suggests that incorporating peer-to-peer communication enhances model aggregation and convergence.

In addition to the positive points highlighted in the previous analysis, the main advantage of the DFL+Gossip scenario is the bandwidth savings in communication when sharing models. Assume  $n$  represents the number of nodes and  $B$  the data volume of model parameters. In CFL, the communication cost is  $2nB$ , which increases to  $n(n-1)B$  in the full DFL scenario. However, by incorporating the Gossip information dissemination mechanism, the cost is reduced to  $nB$ . Therefore, in this case, even reducing the communication cost by one third with respect to DFL, the results of the proposal maintain or improve the results obtained (except when using LR).

### C. ML algorithms comparison

Although earlier sections present individual model metrics, this comparative analysis further highlights the relative merits of each approach within federated scenarios. The RF model consistently outperforms all other evaluated algorithms. Looking at the same results shown in Figure 7, LR algorithm demonstrates the lowest performance among the evaluated models, likely due to its limited ability to capture non-linear relationships inherent in the dataset. It is followed by SVM which, although it obtains acceptable results, does not exceed the results of the others in the DFL+Gossip scenario. Finally, the algorithms based on DT and RF trees stand out, with RF being the only one capable of obtaining very good results in the three federation scenarios.

In addition to the comparisons made in this work, we also compare the results with other similar works. We will take as a reference the work mentioned in Section III [57], since it is the only work found in the literature that uses FL on the same dataset, although a direct comparison is not possible since it is not the same validation scenario.

TABLE IV  
 F1-SCORE FOR DIFFERENT DNS PROVIDERS AND VALIDATION SCENARIOS. NFL: NON-FEDERATED LEARNING; CFL: CENTRALIZED FEDERATED LEARNING; DFL: DECENTRALIZED FEDERATED LEARNING; DFL+Gsp: GOSSIP-BASED DFL.

DNS Provider	SVM				LR				RF				DT			
	NFL	CFL	DFL	DFL+Gsp	NFL	CFL	DFL	DFL+Gsp	NFL	CFL	DFL	DFL+Gsp	NFL	CFL	DFL	DFL+Gsp
GoogleDNS	0.940	0.969	0.969	0.960	0.849	0.93	0.93	0.849	0.961	0.985	0.98	0.982	0.958	0.961	0.967	0.979
Cloudflare	0.945	0.969	0.969	0.965	0.893	0.93	0.93	0.945	0.612	0.985	0.98	0.982	0.672	0.961	0.967	0.981
AdGuard	0.879	0.969	0.969	0.975	0.841	0.93	0.93	0.895	0.499	0.985	0.98	0.982	0.785	0.961	0.967	0.982
Quad9	0.953	0.969	0.969	0.972	0.897	0.93	0.93	0.898	0.961	0.985	0.98	0.982	0.961	0.961	0.967	0.982

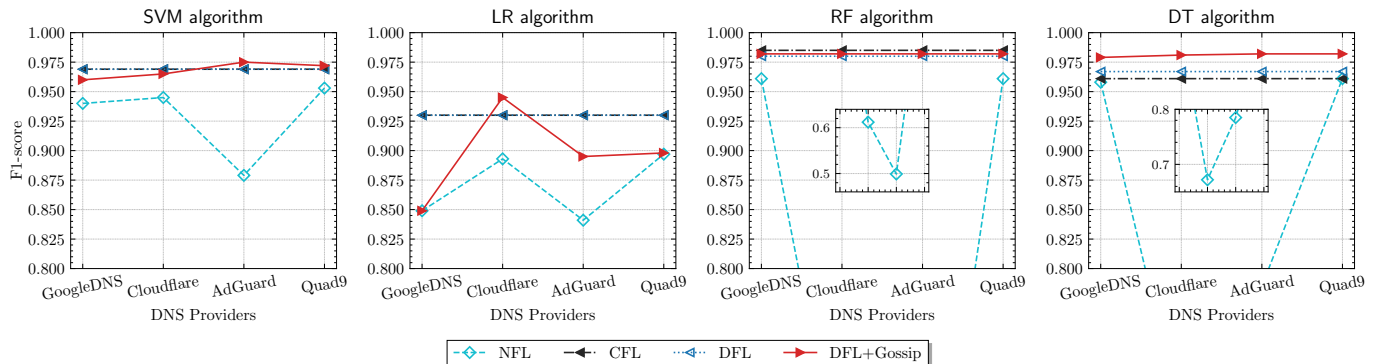


Fig. 8. F1-Score for different DNS providers and validation scenarios NFL: Non-Federated Learning; CFL: Centralized Federated Learning; DFL: Decentralized Federated Learning; DFL+Gsp: Gossip-based DFL.

In this paper, a CNN network is used for the training process in CFL, obtaining final accuracy results around 0.9986 under no-IID data distribution. With our results, we observe that these results are quite similar despite the decentralization of the data and the learning process. In addition, our results have been obtained using computationally simpler algorithms compared to the CNN, demonstrating that the dataset used for validation does not necessitate complex ML models.

The following analysis shows the difference in computational complexity between the ML algorithms used in this comparative study. Let  $n$  be the number of training samples,  $f$  for the features, and  $T$  the number of decision trees, their computational complexities for SVM, LR, DT and RF are  $\mathcal{O}(nf)$ ,  $\mathcal{O}(nf)$ ,  $\mathcal{O}(n \log(n)f)$  and  $\mathcal{O}(Tn \log(n)f)$ , respectively [76]. On the other hand, the CNN architecture used in the cited work includes two convolutional layers, two pooling layers, three fully connected layers and one output layer. Given that  $k$  is the filter size,  $c$  is the number of channels,  $L$  is the number of fully connected layers, and  $h$  is the number of neurons per layer, the training computational complexity (adapted for feature datasets and no images) can be expressed as  $\mathcal{O}(n f k c + L h^2)$ , which is significantly higher than those of the previously mentioned models. While this complexity is significantly higher during training—primarily due to the fully connected layers—CNNs may offer better scalability for larger problems. Once trained, CNNs can also achieve faster inference times compared to models like SVM. Future work should consider evaluating CNN performance under different validation scenarios to more clearly define its advantages in our contributions and objectives.

## VII. CONCLUSION

The use of DoH by an attacker to conceal malicious activities within encrypted DNS traffic poses a significant challenge to traditional network security approaches. While centralized machine learning models can be effective in detecting DoH covert channels, these models require the collection of DNS traffic from multiple sources, raising privacy and security concerns. Additionally, the centralized approach may result in congestion and single points of failure, limiting its effectiveness in large-scale deployments.

The main contribution of this work lies in the proposal, CO-DEFEND, a Gossip-based DFL collaborative system. DFL offers a privacy-preserving alternative by allowing multiple entities to train a global model without sharing raw data. Unlike traditional FL, which relies on a central node for model aggregation, DFL employs peer-to-peer updates, eliminating the need for centralized coordination. In addition, the batch-based continuous training approach allows adaptation to dynamic environments where a complete dataset is not available from the start.

Another relevant contribution of this work is the adaptation and application of classical machine learning algorithms, such as SVM and RF, to the federation process. Compared to neural networks, which dominate most of the studies in this field, these algorithms (and therefore, the proposed Gossip-based DFL framework) present a lower computational complexity in the training phase, achieving comparable results in many cases.

Our experiments show significant improvements in accuracy and F1-score of trained models compared to distributed scenarios without collaborative learning. Furthermore, the proposal outperforms the results obtained in CFL schemes, in

addition to offering advantages inherent to the DFL approach, such as higher scalability, single-node fault tolerance, and reduced communication costs thanks to efficient dissemination algorithms based on Gossip. Despite the use of PCA potentially reducing accuracy, the results have shown improvements over centralized approaches while providing benefits by mitigating overfitting issues and enhancing privacy against adversarial attacks.

One of the critical challenges in DFL for malicious DoH tunnel classification is the presence of adversarial participants seeking to compromise the integrity of the global model. Malicious nodes could inject manipulated updates to degrade the performance of the model, misclassify malicious DoH traffic as benign, or introduce backdoors. To mitigate this, blockchain-based verification can be integrated into the DFL framework to ensure model integrity. Future work should evaluate the trade-offs between security, computational overhead, and communication efficiency when implementing these defenses.

On the other hand, although our proposal presents an incremental approach to the DFL scheme, the performance of the algorithms used in the framework has not been validated with datasets affected by the concept drift phenomenon. Thus, the validation and design of techniques to alleviate the possible effect of catastrophic forgetting in realistic online learning scenarios are proposed as a line of future work.

#### ACKNOWLEDGMENT

This work was supported by the grant COMPROMISE (PID2020-113795RB-C32 and PID2020-113795RB-C33) funded by MCIU/AEI/10.13039/501100011033; the grant DISCOVERY (PID2023-148716OB-C31 and PID2023-148716OB-C33) funded by MCIU/AEI/10.13039/501100011033 and FEDER, UE and the Grant QURSA (TED2021-130369B and TED2021-130369B-C32) funded by MCIU/AEI/10.13039/501100011033 and European Union NextGenerationEU/PRTR. In part, this work was also carried out within the framework of funding provided by the Recovery, Transformation and Resilience Plan, financed by the European Union (Next Generation), partly through the “TRUFFLES: TRUsted Framework for Federated LEarning Systems” Project, within the strategic cybersecurity projects (INCIBE, Spain), and partly through the I-Shaper Project (strategic project C114/23). Additionally, in part has been funded by the Galician Regional Government under project ED431B 2024/41 (GPC).

#### REFERENCES

- [1] P. E. Hoffman and P. McManus, “DNS Queries over HTTPS (DoH),” RFC 8484, 2018.
- [2] K. Bumanglag and H. Kettani, “On the impact of DNS over HTTPS paradigm on cyber systems,” in *3rd International Conference on Information and Computer Technologies (ICICT)*. IEEE, 2020, pp. 494–499.
- [3] Y. Wang, A. Zhou, S. Liao, R. Zheng, R. Hu, and L. Zhang, “A comprehensive survey on DNS tunnel detection,” *Computer Networks*, vol. 197, 2021.
- [4] M. MontazeriShatoori, L. Davidson, G. Kaur, and A. Habibi Lashkari, “Detection of DoH tunnels using time-series classification of encrypted traffic,” in *IEEE Intl. Conf. on Dependable, Autonomic and Secure Computing (DASC)*, 2020, pp. 63–70.
- [5] H. B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, “Communication-efficient learning of deep networks from decentralized data,” *Proceedings of the 20 th International Conference on Artificial Intelligence and Statistics (AISTATS) 2017. JMLR: W&CP volume 54*, 2016, doi: 10.48550/arXiv.1602.05629.
- [6] E. Hallaji, R. Razavi-Far, M. Saif, B. Wang, and Q. Yang, “Decentralized federated learning: A survey on security and privacy,” *IEEE Transactions on Big Data*, vol. 10, no. 2, pp. 194–213, 2024.
- [7] P. Joshi and P. Kulkarni, “Incremental learning: areas and methods-a survey,” *International Journal of Data Mining & Knowledge Management Process*, vol. 2, no. 5, p. 43, 2012.
- [8] P. Mockapetris, “Domain names - implementation and specification,” RFC 1035, 1987.
- [9] K. Hynek, D. Vekshin, J. Luxemburk, T. Cejka, and A. Wasicek, “Summary of DNS over HTTPS abuse,” *IEEE Access*, vol. 10, pp. 54 668–54 680, 2022.
- [10] G. Schmid, “Thirty years of DNS insecurity: Current issues and perspectives,” *IEEE Communications Surveys & Tutorials*, vol. 23, no. 4, pp. 2429–2459, 2021.
- [11] A. Turing and G. Ye, “An Analysis of Godlua Backdoor,” *360 Netlab Blog*, 2019.
- [12] C. Cimpanu, “Iranian hacker group becomes first known APT to weaponize DNS-over-HTTPS (DoH),” 2020. [Online]. Available: <https://zd.net/3EBD8OS>
- [13] A. Merlo, G. Papaleo, S. Veneziano, and M. Aiello, “A Comparative Performance Evaluation of DNS Tunneling Tools,” in *Computational Intelligence in Security for Information Systems*. Springer, 2011, pp. 84–91.
- [14] E. Ekman and B. Andersson, “iodine,” 2014. [Online]. Available: <https://github.com/yarrick/iodine>
- [15] O. Dembour and N. Collignon, “dns2tcp,” 2017. [Online]. Available: <https://github.com/alex-sector/dns2tcp>
- [16] R. Bowes, “dnscat2,” 2017. [Online]. Available: <https://github.com/iagox86/dnscat2>
- [17] L. Bittencourt, R. Immich, R. Sakellariou, N. Fonseca, E. Madeira, M. Curado, L. Villas, L. DaSilva, C. Lee, and O. Rana, “The internet of things, fog and cloud continuum: Integration and challenges,” *Internet of Things*, vol. 3-4, pp. 134–155, 2018. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2542660518300635>
- [18] J. Wen, Z. Zhang, Y. Lan, Z. Cui, J. Cai, and W. Zhang, “A survey on federated learning: challenges and applications,” *International Journal of Machine Learning and Cybernetics*, vol. 14, no. 2, pp. 513–535, 2023.
- [19] V. Mothukuri, R. M. Parizi, S. Pouriyeh, Y. Huang, A. Dehghantaha, and G. Srivastava, “A survey on security and privacy of federated learning,” *Future Generation Computer Systems*, vol. 115, pp. 619–640, 2021.
- [20] J. Geiping, H. Bauermeister, H. Dröge, and M. Moeller, “Inverting gradients-how easy is it to break privacy in federated learning?” *Advances in neural information processing systems*, vol. 33, pp. 16 937–16 947, 2020.
- [21] M. Nasr, R. Shokri, and A. Houmansadr, “Comprehensive privacy analysis of deep learning: Passive and active white-box inference attacks against centralized and federated learning,” in *2019 IEEE symposium on security and privacy (SP)*. IEEE, 2019, pp. 739–753.
- [22] M. Fang, X. Cao, J. Jia, and N. Gong, “Local model poisoning attacks to {Byzantine-Robust} federated learning,” in *29th USENIX security symposium (USENIX Security 20)*, 2020, pp. 1605–1622.
- [23] J. Shi, W. Wan, S. Hu, J. Lu, and L. Y. Zhang, “Challenges and approaches for mitigating byzantine attacks in federated learning,” in *2022 IEEE International Conference on Trust, Security and Privacy in Computing and Communications (TrustCom)*. IEEE, 2022, pp. 139–146.
- [24] R. Schlegel, S. Kumar, E. Rosnes, and A. G. i Amat, “Codedpaddeddf and codedsecagg: Straggler mitigation and secure aggregation in federated learning,” *IEEE Transactions on Communications*, vol. 71, no. 4, pp. 2013–2027, 2023.

- [25] A. Elgabli and W. Mesbah, "A novel approach for differential privacy-preserving federated learning," *IEEE Open Journal of the Communications Society*, vol. 6, pp. 466–476, 2025.
- [26] L. Yuan, Z. Wang, L. Sun, S. Y. Philip, and C. G. Brinton, "Decentralized federated learning: A survey and perspective," *IEEE Internet of Things Journal*, 2024.
- [27] H. Ye, L. Liang, and G. Y. Li, "Decentralized federated learning with unreliable communications," *IEEE journal of selected topics in signal processing*, vol. 16, no. 3, pp. 487–500, 2022.
- [28] I. Hegedűs, G. Danner, and M. Jelasity, "Gossip learning as a decentralized alternative to federated learning," in *Distributed Applications and Interoperable Systems: 19th IFIP WG 6.1 International Conference, DAIS 2019, Held as Part of the 14th International Federated Conference on Distributed Computing Techniques, DisCoTec 2019, Kongens Lyngby, Denmark, June 17–21, 2019, Proceedings 19*. Springer, 2019, pp. 74–90.
- [29] D. Cajaraville-Aboy, A. Fernández-Vilas, R. P. Díaz-Redondo, and M. Fernández-Veiga, "Byzantine-robust aggregation for securing decentralized federated learning," *arXiv preprint arXiv:2409.17754*, 2024.
- [30] D.-W. Zhou, Q.-W. Wang, Z.-H. Qi, H.-J. Ye, D.-C. Zhan, and Z. Liu, "Class-incremental learning: A survey," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [31] Y. Liu, J. Wang, J. Li, S. Niu, and H. Song, "Class-incremental learning for wireless device identification in iot," *IEEE Internet of Things Journal*, vol. 8, no. 23, pp. 17227–17235, 2021.
- [32] K. Shmelkov, C. Schmid, and K. Alahari, "Incremental learning of object detectors without catastrophic forgetting," in *Proceedings of the IEEE international conference on computer vision*, 2017, pp. 3400–3409.
- [33] R. Elwell and R. Polikar, "Incremental learning of concept drift in nonstationary environments," *IEEE transactions on neural networks*, vol. 22, no. 10, pp. 1517–1531, 2011.
- [34] D. Kim, J. Bae, Y. Jo, and J. Choi, "Incremental learning with maximum entropy regularization: Rethinking forgetting and intransigence," *arXiv preprint arXiv:1902.00829*, 2019.
- [35] X. Liu, C. Wu, M. Menta, L. Herranz, B. Raducanu, A. D. Bagdanov, S. Jui, and J. v. de Weijer, "Generative feature replay for class-incremental learning," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition workshops*, 2020, pp. 226–227.
- [36] Y. M. Banadaki, "Detecting malicious DNS over HTTPS traffic in domain name system using machine learning classifiers," *Journal of Computer Sciences and Applications*, vol. 8, no. 2, 2020.
- [37] S. K. Singh and P. K. Roy, "Detecting malicious DNS over HTTPS traffic using machine learning," in *2020 International Conference on Innovation and Intelligence for Informatics, Computing and Technologies (3ICT)*. IEEE, 2020, pp. 1–6.
- [38] M. Behnke, N. Briner, D. Cullen, K. Schwerdtfeger, J. Warren, R. Basnet, and T. Doleck, "Feature engineering and machine learning model comparison for malicious activity detection in the DNS-over-HTTPS protocol," *IEEE Access*, vol. 9, pp. 129902–129916, 2021.
- [39] R. Alenezi and S. A. Ludwig, "Classifying DNS tunneling tools for malicious DoH traffic," in *2021 IEEE Symposium Series on Computational Intelligence (SSCI)*, 2021, pp. 1–9.
- [40] H. Jha, I. Patel, G. Li, A. K. Cherukuri, and S. Thaseen, "Detection of tunneling in DNS over HTTPS," in *2021 7th International Conference on Signal Processing and Communication (ICSC)*, 2021, pp. 42–47.
- [41] T. Zebin, S. Rezvy, and Y. Luo, "An explainable AI-based intrusion detection system for DNS over HTTPS (DoH) attacks," *IEEE Transactions on Information Forensics and Security*, vol. 17, pp. 2339–2349, 2022.
- [42] Q. Abu Al-Haija, M. Alohaly, and A. Odeh, "A lightweight double-stage scheme to identify malicious DNS over HTTPS traffic using a hybrid learning approach," *Sensors*, vol. 23, no. 7, p. 3489, 2023.
- [43] A. R. Alzighaibi, "Detection of DoH traffic tunnels using deep learning for encrypted traffic classification," *Computers*, vol. 12, no. 3, p. 47, 2023.
- [44] R. Mitsuhashi, Y. Jin, K. Iida, T. Shinagawa, and Y. Takai, "Malicious DNS tunnel tool recognition using persistent DoH traffic analysis," *IEEE Transactions on Network and Service Management*, vol. 20, no. 2, pp. 2086–2095, 2023.
- [45] S. Niktabe, A. H. Lashkari, and D. P. Sharma, "Detection, characterization, and profiling DoH malicious traffic using statistical pattern recognition," *International Journal of Information Security*, vol. 23, no. 2, pp. 1293–1316, 2024.
- [46] S. Niktabe, A. H. Lashkari, and A. H. Roudsari, "Unveiling DoH tunnel: Toward generating a balanced DoH encrypted traffic dataset and profiling malicious behavior using inherently interpretable machine learning," *Peer-to-Peer Networking and Applications*, vol. 17, no. 1, pp. 507–531, 2024.
- [47] S. Truex, N. Baracaldo, A. Anwar, T. Steinke, H. Ludwig, R. Zhang, and Y. Zhou, "A hybrid approach to privacy-preserving federated learning," in *Proceedings of the 12th ACM workshop on artificial intelligence and security*, 2019, pp. 1–11.
- [48] Y. Liu, Y. Liu, Z. Liu, Y. Liang, C. Meng, J. Zhang, and Y. Zheng, "Federated forest," *IEEE Transactions on Big Data*, vol. 8, no. 3, pp. 843–854, 2020.
- [49] M. González-Soto, R. P. Díaz-Redondo, M. Fernández-Veiga, B. Fernández-Castro, and A. Fernández-Vilas, "Decentralized and collaborative machine learning framework for iot," *Computer Networks*, vol. 239, p. 110137, 2024. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1389128623005820>
- [50] Z. Jin, J. Zhou, B. Li, X. Wu, and C. Duan, "FI-iids: A novel federated learning-based incremental intrusion detection system," *Future Generation Computer Systems*, vol. 151, pp. 57–70, 2024.
- [51] A. Qayyum, K. Ahmad, M. A. Ahsan, A. Al-Fuqaha, and J. Qadir, "Collaborative federated learning for healthcare: Multi-modal covid-19 diagnosis at the edge," *IEEE Open Journal of the Computer Society*, vol. 3, pp. 172–184, 2022.
- [52] G. Long, Y. Tan, J. Jiang, and C. Zhang, "Federated learning for open banking," in *Federated learning: privacy and incentive*. Springer, 2020, pp. 240–254.
- [53] Z. Su, Y. Wang, T. H. Luan, N. Zhang, F. Li, T. Chen, and H. Cao, "Secure and efficient federated learning for smart grid with edge-cloud collaboration," *IEEE Transactions on Industrial Informatics*, vol. 18, no. 2, pp. 1333–1344, 2021.
- [54] W. Zhang, D. Yang, W. Wu, H. Peng, N. Zhang, H. Zhang, and X. Shen, "Optimizing federated learning in distributed industrial iot: A multi-agent approach," *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 12, pp. 3688–3703, 2021.
- [55] R. Doriguzzi-Corin and D. Siracusa, "Flad: adaptive federated learning for ddos attack detection," *Computers & Security*, vol. 137, p. 103597, 2024.
- [56] Y. Zhao, J. Chen, D. Wu, J. Teng, and S. Yu, "Multi-task network anomaly detection using federated learning," in *Proceedings of the 10th international symposium on information and communication technology*, 2019, pp. 273–279.
- [57] B. Li, S. He, H. Peng, E. Zhang, and J. Xin, "Detecting DoH tunnels with privacy protection using federated learning," in *International Conference on Network Communication and Information Security (ICNCIS 2021)*, vol. 12175. SPIE, 2022, pp. 133–141.
- [58] E. T. Martínez Beltrán, M. Q. Pérez, P. M. S. Sánchez, S. L. Bernal, G. Bovet, M. G. Pérez, G. M. Pérez, and A. H. Celdrán, "Decentralized federated learning: Fundamentals, state of the art, frameworks, trends, and challenges," *IEEE Communications Surveys and Tutorials*, vol. 25, no. 4, p. 2983–3013, 2023, doi: 10.1109/comst.2023.3315746. [Online]. Available: <http://dx.doi.org/10.1109/COMST.2023.3315746>
- [59] S. R. Pokhrel and J. Choi, "Federated learning with blockchain for autonomous vehicles: Analysis and design challenges," *IEEE Transactions on Communications*, vol. 68, no. 8, pp. 4734–4746, 2020.
- [60] S. Boyd, A. Ghosh, B. Prabhakar, and D. Shah, "Randomized gossip algorithms," *IEEE transactions on information theory*, vol. 52, no. 6, pp. 2508–2530, 2006.
- [61] D. Yin, Y. Chen, K. Ramchandran, and P. Bartlett, "Byzantine-robust distributed learning: Towards optimal statistical rates," 2018, doi: 10.48550/arXiv.1803.01498.
- [62] P. Blanchard, E. M. E. Mhamdi, R. Guerraoui, and J. Stainer, "Byzantine-tolerant machine learning," 2017, doi: 10.48550/arXiv.1703.02757.
- [63] P. M. Corea, Y. Liu, J. Wang, S. Niu, and H. Song, "Explainable ai for comparative analysis of intrusion detection models," in *2024 IEEE International Mediterranean Conference on Communications and Networking (MeditCom)*. IEEE, 2024, pp. 585–590.



- [64] C. Cortes and V. Vapnik, "Support-vector networks," *Machine Learning*, vol. 20, no. 3, pp. 273–297, Sep 1995. [Online]. Available: <https://doi.org/10.1007/BF00994018>
- [65] R. E. Wright, "Logistic regression," in *Reading and understanding multivariate statistics*, L. G. Grimm and P. R. Yarnold, Eds. American Psychological Association, 1995, pp. 217–244.
- [66] L. Breiman, J. Friedman, R. A. Olshen, and C. J. Stone, *Classification and Regression Trees*. Chapman & Hall, 1984.
- [67] J. R. Quinlan, "Induction of decision trees," *Mach. Learn.*, vol. 1, no. 1, p. 81–106, Mar. 1986. [Online]. Available: <https://doi.org/10.1023/A:1022643204877>
- [68] P. Domingos and G. Hulten, "Mining high-speed data streams," *Proceeding of the Sixth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 11 2002.
- [69] Y. Wu, S. Cai, X. Xiao, G. Chen, and B. Ooi, "Privacy preserving vertical federated learning for tree-based models," *Proceedings of the VLDB Endowment*, vol. 13, pp. 2090–2103, 08 2020.
- [70] L. Breiman, "Random forests," *Machine Learning*, vol. 45, pp. 5–32, 10 2001.
- [71] T. Markovic, M. Leon, D. Buffoni, and S. Punnekkat, *Random Forest Based on Federated Learning for Intrusion Detection*. IFIP Advances in Information and Communication Technology, 06 2022, pp. 132–144.
- [72] L. A. C. de Souza, G. Antonio F. Rebello, G. F. Camilo, L. C. B. Guimarães, and O. C. M. B. Duarte, "Dfedforest: Decentralized federated forest," in *2020 IEEE International Conference on Blockchain (Blockchain)*, 2020, pp. 90–97.
- [73] M. Moure-Garrido, C. Campo, and C. Garcia-Rubio, "Real time detection of malicious doh traffic using statistical analysis," *Computer Networks*, vol. 234, p. 109910, 2023. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1389128623003559>
- [74] M. Hossin and M. N. Sulaiman, "A review on evaluation metrics for data classification evaluations," *International journal of data mining & knowledge management process*, vol. 5, no. 2, 2015.
- [75] P. Riedel, L. Schick, R. von Schwerin, M. Reichert, D. Schaudt, and A. Hafner, "Comparative analysis of open-source federated learning frameworks - a literature-based survey and review," *International Journal of Machine Learning and Cybernetics*, vol. 15, no. 11, pp. 5257–5278, Nov 2024. [Online]. Available: <https://doi.org/10.1007/s13042-024-02234-z>
- [76] C. M. Bishop and N. M. Nasrabadi, *Pattern recognition and machine learning*. Springer, 2006, vol. 4, no. 4.