

# Kolmogorov’s Structure Functions with an Application to the Foundations of Model Selection

Nikolai Vereshchagin\*

Paul Vitányi†

## Abstract

We vindicate, for the first time, the rightness of the original “structure function”, proposed by Kolmogorov in 1974, by showing that for *every* individual data, minimizing a two-part code consisting of a model—in a model class determined by given (Kolmogorov) complexity constraints—together with the data-to-model code, or just the one-part code consisting of the data-to-model code, always produces a model of best fit (for which the data is maximally “typical”). Code minimization separates optimal model information from the remaining accidental information. This is the first rigorous proof that ML, MDL, and related methods in model selection, *always* give a best possible model, and not only with high probability. Settlement of this long-standing question is the more remarkable since the minimal randomness deficiency function (measuring best fit) itself cannot be monotonically approximated, but the shortest one-part or two-part code above can. We show that both the structure function and the minimum randomness deficiency function can assume all shapes over their full domain (improving an old result of L.A. Levin and both an old and a recent one of V.V. Vyugin). This establishes that model selection under model-complexity constraints is a relevant, and indeed common, concern. We give an explicit realization of optimal one-part and two-part codes at all levels of model complexity. We determine the (un)computability properties of the various functions and “algorithmic sufficient statistic” considered.

## 1 Introduction

As perhaps the last mathematical innovation of an extraordinary scientific career, Kolmogorov [15, 14] proposed to found statistical theory on finite combinatorial principles independent of probabilistic assumptions, as the relation between the individual data and its explanation (model), expressed by Kolmogorov’s structure function. This function, its variations and its relation to model selection, have obtained some notoriety but have not before been comprehensively analyzed and understood [17, 2, 22, 5, 12, 18, 23, 9, 11, 8, 3]. It has always been questioned why Kolmogorov chose to focus on the the mysterious function  $h_x$  below, rather than on the more evident  $\beta_x$  variant below. Our main result, with the beauty of truth, justifies Kolmogorov’s intuition. One easily stated consequence is: For all data, minimizing a two-part code consisting of one part model description and one part data-to-model code (essentially the celebrated MDL code [1]), subject to a given model-complexity constraint, as well as minimizing the one-part code consisting of just the data-to-model code (essentially the maximum likelihood estimator), *in every case* (and not only with high probability) selects a model that is a “best explanation” of the data within the given constraint. A practical consequence is as follows: While the best fit (minimal randomness deficiency under complexity constraints on the model) cannot be computationally monotonically approximated, we can monotonically minimize the two-part code, or the one-part code, and thus monotonically approximate *implicitly* the best fitting model. But this should be sufficient: we want the best model rather than a number that measures of its goodness.

In Kolmogorov’s initial proposal, as in this work, models are finite sets of finite binary strings, and the data is one of the strings (all discrete data can be binary encoded). Contrary to appearances,

\*Supported in part by Grant 01-01-01028 from Russian Federation Basic Research Fund. Work done while visiting CWI. Address: Department of Mathematical Logic and Theory of Algorithms, Faculty of Mechanics and Mathematics, Moscow State University, Leninskie Gory, Moscow, Russia 119992. Email: [ver@mech.math.msu.su](mailto:ver@mech.math.msu.su).

†Supported in part by the EU fifth framework project QAIP, IST-1999-11234, the NoE QUIPROCONE IST-1999-29064, the ESF QiT Programme, and the EU Fourth Framework BRA NeuroCOLT II Working Group EP 27150. Address: CWI, Kruislaan 413, 1098 SJ Amsterdam, The Netherlands. Email: [Paul.Vitanyi@cwi.nl](mailto:Paul.Vitanyi@cwi.nl).

this is no real restriction: the main results generalize to the case where the models are arbitrary computable probability density functions, [17], and even to the case where the model class consists of arbitrary total recursive functions, [20], see below.

**Relation to classical statistics and learning theory:** In classical probabilistic statistics the goodness of the selection process is measured in terms of expectations over probabilistic ensembles. For current applications, average relations are often irrelevant, since the part of the support of the probability density function that will ever be observed has about zero measure. This may be the case in, for example, complex video and sound analysis. There arises the problem that for individual cases the selection performance may be bad although the performance is good on average, or vice versa. There is also the problem of what probability means, whether it is subjective, objective, or exists at all. Kolmogorov's proposal outlined strives for the firmer and less contentious ground expressed in finite combinatorics and effective computation.

**Prefix Code:** Let  $x, y, z \in \mathcal{N}$ , where  $\mathcal{N}$  denotes the natural numbers and we identify  $\mathcal{N}$  and  $\{0, 1\}^*$  according to the correspondence

$$(0, \epsilon), (1, 0), (2, 1), (3, 00), (4, 01), \dots$$

Here  $\epsilon$  denotes the *empty word*. The *length*  $|x|$  of  $x$  is the number of bits in the binary string  $x$ , not to be confused with the *cardinality*  $|S|$  of a finite set  $S$ . For example,  $|010| = 3$  and  $|\epsilon| = 0$ , while  $|\{0, 1\}^n| = 2^n$  and  $|\emptyset| = 0$ . The emphasis is on binary sequences only for convenience; observations in any alphabet can be so encoded in a way that is 'theory neutral'.

A binary string  $x$  is a *proper prefix* of a binary string  $y$  if we can write  $x = yz$  for  $z \neq \epsilon$ . A set  $\{x, y, \dots\} \subseteq \{0, 1\}^*$  is *prefix-free* if for any pair of distinct elements in the set neither is a proper prefix of the other. A prefix-free set is also called a *prefix code*. There is a special type of prefix code, the *self-delimiting code*, that encodes the source word  $x = x_1x_2 \dots x_n$  by the code word

$$\bar{x} = 1^n 0x.$$

This code is self-delimiting because we can determine where the code word  $\bar{x}$  ends by reading it from left to right without backing up. Using this code we define the standard self-delimiting code for  $x$  to be  $x' = \bar{x}|x$ . It is easy to check that  $|\bar{x}| = 2n + 1$  and  $|x'| = n + 2 \log n + 1$ .

**Kolmogorov Complexity:** For precise definitions, notation, and results see the text [12]. For technical reasons we need a variant of complexity, so-called prefix complexity, which is associated with Turing machines for which the set of programs resulting in a halting computation is prefix free. (Actually some results, especially Theorem 6, are easier to prove for plain complexity; most results presented here are precise up to an additive logarithmic term, and hence are valid for plain complexity as well. Prefix complexity is important for "fine details" only.) We realize prefix complexity by considering a special type of Turing machine with a one-way input tape, a separate work tape, and a one-way output tape. Such Turing machines are called *prefix Turing machines*. If a machine  $T$  halts with output  $x$  after having scanned all of  $p$  on the input tape, but not further, then  $T(p) = x$  and we call  $p$  a *program* for  $T$ . It is easy to see that  $\{p : T(p) = x, x \in \{0, 1\}^*\}$  is a *prefix code*. Let  $T_1, T_2, \dots$  be a standard enumeration of all prefix Turing machines with a binary input tape, for example the lexicographical length-increasing ordered syntactic prefix Turing machine descriptions, [12], and let  $\phi_1, \phi_2, \dots$  be the enumeration of corresponding functions that are computed by the respective Turing machines ( $T_i$  computes  $\phi_i$ ). These functions are the *partial recursive* functions or *computable* functions (of effectively prefix-free encoded arguments). The Kolmogorov complexity of  $x$  is the length of the shortest binary program from which  $x$  is computed. Let  $\langle \cdot \rangle$  be a standard invertible effective one-one encoding from  $\mathcal{N} \times \mathcal{N}$  to a recursive subset of  $\mathcal{N}$ . For example, we can set  $\langle x, y \rangle = x'y$ .

DEFINITION 1. The prefix Kolmogorov complexity of  $x$  given  $y$  (as auxiliary information) is

$$K(x | y) = \min_{p, i} \{|i'p| : T_i(y'p) = x, p \in \{0, 1\}^*, i \in \mathcal{N}\}.$$

Define  $K(x) = K(x | \epsilon)$ .

Taking the universal prefix machine  $U$  such that  $U(y'i'p) = T_i(y'p)$  for all  $i, p, y$  we can equivalently define  $K(x | y) = \min_q \{|q| : U(y'q) = x\}$ .

A prominent property of the prefix-freeness of  $K(x)$  is that we can interpret  $2^{-K(x)}$  as a probability distribution since  $K(x)$  is the length of a shortest prefix-free program for  $x$ . By the fundamental Kraft's inequality, see for example [5, 12], we know that if  $l_1, l_2, \dots$  are the code-word lengths of a prefix code, then  $\sum_x 2^{-l_x} \leq 1$ . Hence,

$$\sum_x 2^{-K(x)} \leq 1. \quad (1)$$

This leads to the notion of universal distribution—a rigorous form of Occam's razor—which implicitly plays an important part in the present exposition. The functions  $K(\cdot)$  and  $K(\cdot | \cdot)$ , though defined in terms of a particular machine model, are machine-independent up to an additive constant and acquire an asymptotically universal and absolute character through Church's thesis, from the ability of universal machines to simulate one another and execute any effective process. The Kolmogorov complexity of a string can be viewed as an absolute and objective quantification of the amount of information in it. This leads to a theory of *absolute information contents* of *individual* objects in contrast to classical information theory which deals with *average information to communicate* objects produced by a *random source*. Since the former theory is much more precise, it is surprising that analogs of theorems in classical information theory hold for Kolmogorov complexity, be it in somewhat weaker form. An example is the celebrated *symmetry of information* property (denoting  $K(x, y) = K(\langle x, y \rangle)$ ):

$$K(x, y) = K(x) + K(y | x, K(x)) + O(1) = K(y) + K(x | y, K(y)) + O(1). \quad (2)$$

**Use of additive constants:** It is customary in this area to use “additive constant  $c$ ” or equivalently “additive  $O(1)$  term” to mean a constant, accounting for the length of a fixed binary program, independent from every variable or parameter in the expression in which it occurs.

**Kolmogorov structure functions:** We will prove that there is a close relation between functions describing three, a priori seemingly unrelated, aspects of modeling individual data. We first need a definition. Denote the *complexity of the finite set  $S$*  by  $K(S) = |S^*|$ , the length (number of bits) in the shortest binary program  $S^*$  from which the reference universal prefix machine  $U$  computes a listing of the elements of  $S$  and then halts. That is, if  $S = \{x_0, \dots, x_{n-1}\}$ , then  $U(S^*) = (x_0, \dots, x_{n-1})$ , the right-hand side actually coded as some easily parsable expression. If there is more than one such shortest program, then  $S^*$  is the first one that halts in a standard dovetailed running of all programs. We define a shortest program  $x^*$  for a finite string  $x$  similarly. Note that the information in the pair  $(y, K(y))$  is equal to the information in  $y^*$ , since we can derive the pair from the shortest program and vice versa. The lack of typicality of  $x$  with respect to a finite set  $S \subseteq \{0, 1\}^*$  containing it, is the amount by which the complexity of  $x$  as an element of a  $S$  falls short of the maximal possible complexity. Formally: The *randomness deficiency* of  $x$  in  $S$  is defined by

$$\delta(x | S) = \log |S| - K(x | S^*),$$

for  $x \in S$ , and  $\infty$  otherwise. The *minimal randomness deficiency* function is

$$\beta_x(\alpha) = \min_S \{\delta(x | S) : S \ni x, K(S) \leq \alpha\}. \quad (3)$$

If  $\delta(x | S)$  is small, then  $x$  may be considered as a *typical* member of  $S$ . This means that  $S$  is a “best” model for  $x$ —a most likely explanation. There are no simple special properties that single it out from the majority of elements in  $S$ . Kolmogorov [15, 14] proposed the following function: The *Kolmogorov structure* function  $h_x$  of given data  $x$  is defined by

$$h_x(\alpha) = \min_S \{\log |S| : S \ni x, K(S) \leq \alpha\}, \quad (4)$$

where  $S \ni x$  is a contemplated model for  $x$ , and  $\alpha$  is a nonnegative integer value bounding the complexity of the contemplated  $S$ 's. Note that  $h_x(\alpha) = \min_S \{K(x | S^*) + \delta(x | S) : S \ni x, K(S) \leq \alpha\}$ . Clearly, the Kolmogorov structure function is non-increasing and reaches  $\log |\{x\}| = 0$  for  $\alpha = K(x) + c_1$  where  $c_1$  is the number of bits required to change  $x$  into  $\{x\}$ . Suppose  $S$  is a set witnessing the relation  $h_x(\alpha) = \log |S|$ . Since  $S$  determines  $\log |S|$ , a description of  $x$  by concatenating the

self-delimiting program  $S^*$  with a (possibly padded up to)  $(\log |S|)$ -length index of  $x$  in  $S$ , is self-delimiting. Therefore, there is a constant  $c_2$  (the length of the fixed program to reconstruct  $x$  from the two-part description by way of  $S \ni x$ ) such that

$$K(S) + \log |S| + c_2 \geq K(x). \quad (5)$$

We thus conclude that the function  $h_x(\alpha)$  never decreases more than a fixed independent constant below the diagonal *sufficiency line*  $L$  defined by  $L(\alpha) + \alpha = K(x)$ , which is a lower bound on  $h_x(\alpha)$  and is touched by the graph of  $h_x$  for certain  $\alpha$ 's (where thus  $\alpha + h_x(\alpha) = K(x)$ ). At these points the witnessing set forms a *sufficient statistic*, the one with least  $\alpha$  being *minimal*, [5, 9], which suggestive nomenclature is explained in [9].

The length of the minimal two-part code for  $x$  consisting of a model cost  $K(S)$  and the log-cardinality of  $S \ni x$  (the length of the index of  $x$  in an enumeration of  $S$ ), the complexity of  $S$  upper bounded by  $\alpha$  is given by the *MDL function*:

$$\lambda_x(\alpha) = \min_S \{\Lambda(S) : S \ni x, K(S) \leq \alpha\}, \quad (6)$$

where  $\Lambda(S) = \log |S| + K(S)$  is the total length of two part code of  $x$  with help of model  $S$ . Apart from being convenient for the technical analysis in this work,  $\lambda_x(\alpha)$  is the celebrated two-part Minimum Description Length code length (Example 3) with the model-code length restricted to at most  $\alpha$ .

**EXAMPLE 1. Lossy Compression:** The function  $\beta_x(\alpha)$  is relevant to lossy compression (used, for instance, to compress images). Assume we need to compress  $x$  to  $\alpha$  bits where  $\alpha \ll K(x)$ . Of course this implies some loss of information present in  $x$ . One way to select redundant information to discard is as follows: Find a set  $S \ni x$  with  $K(S) \leq \alpha$  and with small  $\delta(x | S)$ , and consider the compressed version  $S^*$  of  $S$ . To reconstruct an  $x'$ , a decompressor uncompresses  $S^*$  to  $S$  and selects at random an element  $x'$  of  $S$ . Since  $\delta(x | S)$  is small, he will obtain an  $x'$  that is effectively indistinguishable from  $x$ . Hence,  $x'$  serves the purpose of the message  $x$  as well as does  $x$  itself. Let us look at an example. To transmit a picture of “rain” through a channel with limited capacity  $\alpha$ , one can transmit the indication that this is a picture of the rain and the particular drops may be chosen by the receiver at random. In this interpretation,  $\beta_x(\alpha)$  indicates how “random” or “typical”  $x$  is with respect to the best model at complexity level  $\alpha$ —and hence how “indistinguishable” from the original  $x$  the randomly reconstructed  $x'$  can be expected to be.  $\diamond$

**Background and Related Work:** A.N. Kolmogorov [14, 15] proposed the combinatorial non-probabilistic approach to an individual data-to-model relation, two-part codes separating the *structure* or *meaningful information* of a string from meaningless *accidental* features. There is no written version, apart from a few lines [14], so we have to rely on oral history of witnesses [8, 3, 11], and, says T. Cover [3]: “I remember taking many long hours trying to understand the motivation of Kolmogorov’s approach.” According to Peter Gács, [8]: “Kolmogorov drew a picture of  $h_x(\alpha)$  as a function of  $\alpha$  monotonically approaching the diagonal [sufficiency line]. Kolmogorov stated that it was known (proved by L.A. Levin) that in some cases it remained far from the diagonal line till the very end.” L.A. Levin [11] proved (at Kolmogorov’s suggestion but unpublished) in the early 70s that  $h_x(\alpha) + \alpha + O(\log \alpha)$  is monotone but otherwise arbitrary within  $\pm O(p \log \alpha)$  accuracy where  $p$  is the number of “jumps” of the arbitrary function imitated which can be rephrased as  $O(\sqrt{\alpha \log \alpha})$  [square root] accuracy, until it stabilizes at  $K(x)$ ; Kolmogorov didn’t define  $\beta_x$  or  $\lambda_x$  or suggest anything like (7) below. Related work on so-called “non-stochastic objects” (where  $h_x(\alpha) + \alpha$  drops to  $K(x)$  only for large  $\alpha$ ) is [17, 22, 18, 19, 20]. These references also consider the model class extended from finite sets to computable probability density functions, and even further to total recursive functions. In 1987, [22, 23], V’yugin established that the randomness deficiency function  $\beta_x(\alpha)$  can assume all possible shapes, (within the obvious constraints) but only for  $\alpha = o(\beta_x(\alpha)) \leq o(|x|)$ . In the survey [4] of Kolmogorov’s work in information theory, the authors preferred to mention  $\beta_x(\alpha)$ , because it by definition optimizes “best fit,” rather than  $h_x(\alpha)$  of which the usefulness and meaningfulness was mysterious. But Kolmogorov had a seldom erring intuition: we will show that his original proposal  $h_x$  in the proper sense incorporates all desirable properties of  $\beta_x(\alpha)$ , and in fact is superior. In [2, 5, 4] a notion of “algorithmic sufficient statistics”, derived from Kolmogorov’s structure function, is suggested as the algorithmic approach to the probabilistic notion of sufficient statistic [6, 5] that is central in

classical statistics. The paper [9] investigates the algorithmic notion in detail and formally establishes such a relation. The algorithmic (minimal) sufficient statistic is related in [19, 10] to the “minimum description length” principle [1] in statistics and inductive reasoning. Moreover, [9] observed that  $\beta_x(\alpha) \leq h_x(\alpha) + \alpha - K(x)$ , establishing a one-sided relation between (3) and (4), and the question was raised whether the converse holds.

**This Work:** The most fundamental result in this paper, shows that minimizing the cardinality of a finite set model containing the data, or minimizing the MDL two-part code for the data, always also minimizes the randomness deficiency of the data in a model, both minimizations taken over all finite set models not exceeding a prescribed constraint on their complexity:

$$\beta_x(\alpha) = h_x(\alpha) + \alpha - K(x) = \lambda_x(\alpha) - K(x), \quad (7)$$

ignoring logarithmic additive terms in argument and value. Additionally, every set  $S$  that witnesses the value  $h_x(\alpha)$  (or  $\lambda_x(\alpha)$ ), also witnesses the value  $\beta_x(\alpha)$  (but not vice versa). It is easy to see that  $h_x(\alpha)$  (and hence  $\lambda_x(\alpha)$ ), and a finite set that witnesses its value, are upper semi-computable (Definition 7); but we show that  $\beta_x(\alpha)$  is neither upper nor lower semi-computable. A priori there is no reason to suppose that a set that witnesses  $h_x(\alpha)$  (or  $\lambda_x(\alpha)$ ) also witnesses  $\beta_x(\alpha)$ , for *every*  $\alpha$ . But the fact that they do, vindicates Kolmogorov’s original proposal and establishes  $h_x$ ’s pre-eminence over  $\beta_x$ . The result can be taken as a foundation and justification of common statistical principles in model selection such as maximum likelihood (Appendix 1) or MDL ([1] and our Example 3). The possible (coarse) shapes of the functions are examined in Section 2. Roughly stated: For every  $x$  the function  $\beta_x(\alpha)$  does not increase and  $\beta_x(k) = 0$ ,  $\beta_x(\alpha) \leq n - k$  and, conversely, for every non-increasing function  $\beta(\alpha)$  and every  $k$  with  $\beta(k) = 0$  and  $\beta(\alpha) \leq n - k$ , there is  $x$  of length  $n$  and of complexity  $k$ , such that  $\beta_x(\alpha \pm O(\log n) \mid \beta) = \beta(\alpha) \pm O(\log n)$  for all  $\alpha \in [0, k]$  (this improves and extends V’yugin’s result [22, 23] above); for every  $x$  the function  $h_x(\alpha) + \alpha$  does not increase and  $h_x(k) = 0$ ,  $h_x(0) \leq n$ , and, conversely, for every  $k$  and every non-increasing function  $h(\alpha) + \alpha$  with  $h(0) \leq n$  and  $h(k) = 0$  (hence by the non-increasing property  $h(0) \geq k$ ) there is  $x$  of length  $n$  of complexity about  $k$  such that  $h_x(\alpha \pm O(\log \alpha) \mid n, h) = h(\alpha) \pm O(\log \alpha)$  for all  $\alpha \in [0, k]$  (this improves the independent related result of L.A. Levin [11] above). This is applied to “snooping curves” extending a recent result of V’yugin, [24], in Example 2. Similar results hold for  $\lambda_x(\alpha)$  by Lemma 1. (This establishes the significance of (7), since it shows that  $\lambda_x(\alpha) \gg K(x)$  is common for  $x, \alpha$  pairs—in which case the more or less easy fact that  $\beta_x(\alpha) = 0$  for  $\lambda_x(\alpha) = K(x)$  is not applicable, and it is a priori unlikely that (7) holds: Why should minimizing a set containing  $x$  also minimize its randomness deficiency? Surprisingly, it does!) In Section 3, we exhibit a universal construction for sets realizing  $h_x(\alpha)$  for all  $\alpha$ . We determined the (fine) details of the function shapes in Section 4. (Non-)computability properties are examined in Section 5, incidentally proving a to our knowledge first natural example,  $\beta_x$ , of a function that is not semi-computable but computable with an oracle for the halting problem.

**Validity for Extended Models:** Following Kolmogorov we analyzed a canonical setting where the models are finite sets. As Kolmogorov himself pointed out, this is no real restriction: the finite sets model class is equivalent, up to a logarithmic additive term, to the model class of probability density functions, as studied in [17, 9]. The analysis is valid, up to logarithmic additive terms, also for the model class of total recursive functions, as studied in [20]. The model class of *computable probability density functions* consists of the set of functions  $P : \{0, 1\}^* \rightarrow [0, 1]$  with  $\sum P(x) = 1$ . “Computable” means here that there is a Turing machine  $T_P$  that, given  $x$  and a positive rational  $\varepsilon$ , computes  $P(x)$  with precision  $\varepsilon$ . The (prefix-) complexity  $K(P)$  of a computable (possibly partial) function  $P$  is defined by  $K(P) = \min_i \{K(i) : \text{Turing machine } T_i \text{ computes } P\}$ . A string  $x$  is typical for a distribution  $P$  if the randomness deficiency  $\delta(x \mid P) = -\log P(x) - K(x \mid P)$  is small. The conditional complexity  $K(x \mid P)$  is defined as follows. Say that a function  $A$  approximates  $P$  if  $|A(y, \varepsilon) - P(y)| < \varepsilon$  for every  $y$  and every positive rational  $\varepsilon$ . Then  $K(x \mid P)$  is the minimum length of a program that given every function  $A$  approximating  $P$  as an oracle prints  $x$ . Similarly,  $P$  is  $c$ -optimal for  $x$  if  $K(P) - \log P(x) \leq K(x) + c$ . Thus, instead of the data-to-model code length  $\log |S|$  for finite set models, we consider the data-to-model code length  $-\log P(x)$  (the Shannon-Fano code). The value  $-\log P(x)$  measures also how likely is  $x$  under hypothesis  $P$  and the mapping  $x \mapsto P_{\min}$  where  $P_{\min}$  minimizes  $-\log P(x)$  over  $P$  with  $K(P) \leq \alpha$  is a *maximum likelihood estimator*. Our results thus imply that that maximum likelihood estimator always returns a hypothesis with minimum randomness deficiency.

The model class of *total recursive functions* consists of the set of computable functions  $p : \{0, 1\}^* \rightarrow \{0, 1\}^*$  that are defined for every argument. The (prefix-) complexity  $K(p)$  of a total recursive function  $p$  is defined by  $K(p) = \min_i \{K(i) : \text{Turing machine } T_i \text{ computes } p\}$ . In place of  $\log |S|$  for finite set models we consider the data-to-model code length  $l_x(p) = \min\{|d| : p(d) = x\}$ . A string  $x$  is typical for a total recursive function  $p$  if the randomness deficiency  $\delta(x | p) = l_x(p) - K(x | p)$  is small. The conditional complexity  $K(x | p)$  is defined as the minimum length of a program that given  $p$  as an oracle prints  $x$ . Similarly,  $p$  is  $c$ -optimal for  $x$  if  $K(p) + l_x(p) \leq K(x) + c$ .

**PROPOSITION 1.** *For every  $x$  and every finite set  $S \ni x$  there is:*

- (a) *A computable probability distribution function  $P$  with  $-\log P(x) = \log |S|$ ,  $\delta(x | P) = \delta(x | S) + O(1)$  and  $K(P) = K(S) + O(1)$ ; and*
- (b) *A total recursive function  $p$  such that  $l_x(p) \leq \log |S|$ ,  $\delta(x | p) \leq \delta(x | S) + O(1)$  and  $K(p) = K(S) + O(1)$ .*

*Proof.* (a) Define  $P(y) = 1/|S|$  for  $y \in S$  and 0 otherwise.

(b) If  $S = \{x_0, \dots, x_{m-1}\}$ , then define  $p(d) = x_{d \bmod m}$ . □

**PROPOSITION 2.** *There are constants  $c, C$ , such that for every string  $x$ , the following holds:*

- (a) *For every computable probability distribution function  $P$  there is a finite set  $S \ni x$  such that  $\log |S| < -\log P(x) + 1$ ,  $\delta(x | S) \leq \delta(x | P) + 2 \log K(P) + K(\lfloor -\log P(x) \rfloor) + 2 \log K(\lfloor -\log P(x) \rfloor) + C$  and  $K(P) \leq K(S) + K(\lfloor -\log P(x) \rfloor) + C$ ; and*
- (b) *For every total recursive function  $p$  there is a finite set  $S \ni x$  with  $\log |S| \leq l_x(p)$ ,  $\delta(x | S) \leq \delta(x | p) + 2 \log K(p) + K(l_x(p)) + 2 \log K(l_x(p)) + c$  and  $K(p) \leq K(S) + K(l_x(p)) + c$ .*

*Proof.* (a) Let  $m = \lfloor -\log P(x) \rfloor$ , that is,  $2^{-m-1} < P(x) \leq 2^{-m}$ . Define  $S = \{y : P(y) > 2^{-m-1}\}$ . Then,  $|S| < 2^{m+1} \leq 2/P(x)$ , which implies the claimed value for  $\log |S|$ . To list  $S$  it suffices to compute all consecutive values of  $P(y)$  to sufficient precision until the combined probabilities exceed  $1 - 2^{-m-1}$ . That is,  $K(S) \leq K(P) + K(m) + O(1)$ . Finally,  $\delta(x | S) = \log |S| - K(x | S^*) < -\log P(x) - K(x | S^*) + 1 = \delta(x | P) + K(x | P) - K(x | S^*) + 1 \leq \delta(x | P) + K(S^* | P) + O(1)$ . The term  $K(S^* | P)$  can be upper bounded as  $K(K(S)) + K(m) + O(1) \leq 2 \log K(S) + K(m) + O(1) \leq 2 \log(K(P) + K(m)) + K(m) + O(1) \leq 2 \log K(P) + 2 \log K(m) + K(m) + O(1)$ , which implies the claimed bound for  $\delta(x | S)$ .

(b) Define  $S = \{y : p(d) = y, |d| = l_x(p)\}$ . Then,  $\log |S| \leq l_x(p)$ . To list  $S$  it suffices to compute  $p(d)$  for every argument of length equal  $l_x(p)$ . Hence,  $K(S) \leq K(p) + K(l_x(p)) + O(1)$ . The upper bound for  $\delta(x | S)$  is derived just in the same way as in the proof of item (a). □

**REMARK 1.** How large are the nonconstant additive complexity terms in Proposition 2 for strings  $x$  of length  $n$ ? In item (a), we are commonly only interested in  $P$  such that  $K(P) \leq n + O(\log n)$  and  $-\log P(x) \leq n + O(1)$ . Indeed, for every  $P$  there is  $P'$  such that  $K(P') \leq \min\{K(P), n\} + O(\log n)$ ,  $\delta(x | P') \leq \delta(x | P) + O(\log n)$ ,  $-\log P'(x) \leq \min\{-\log P(x), n\} + 1$ . Such  $P'$  is defined as follows: If  $K(P) > n$  then  $P'(x) = 1$  and  $P'(y) = 0$  for every  $y \neq x$ ; otherwise  $P' = (P + U_n)/2$  where  $U_n$  stands for the uniform distribution on  $\{0, 1\}^n$ . Then the additive terms in item (a) are  $O(\log n)$ . In item (b) we are commonly only interested in  $p$  such that  $K(p) \leq n + O(\log n)$  and  $l_x(p) \leq n + O(1)$ . Indeed, for every  $p$  there is  $p'$  such that  $K(p') \leq \min\{K(p), n\} + O(\log n)$ ,  $\delta(x | p') \leq \delta(x | p) + O(\log n)$ ,  $l_x(p') \leq \min\{l_x(p), n\} + 1$ . Such  $p'$  is defined as follows: If  $K(p) > n$  then  $p'$  maps all strings to  $x$ ; otherwise  $p'(0u) = p(u)$  and  $p'(1u) = u$ . Then the additive terms in item (b) are  $O(\log n)$ . Thus, in this sense all results in this paper that hold for finite set models extend, up to a logarithmic additive term, to computable probability density function models and to total recursive function models. Since the results in this paper hold only up to additive logarithmic term anyway, this means that all of them equivalently hold for the model class of computable probability density functions, as well as for the model class of total recursive functions.

## 2 Coarse Structure

Let  $\beta_x(\alpha)$  be defined as in (3) and  $h_x(\alpha)$  be defined as in (4). Both functions are 0 ( $\beta_x(\alpha)$  may be  $-O(1)$ ) for all  $\alpha \geq K(x) + c_0$  where  $c_0$  is a small constant. We *represent* the coarse shape of these functions for different  $x$  by functions characteristic of that shape. Informally,  $g$  represents  $f$  means

that the graph of  $f$  is contained in a strip of logarithmic (in the length  $n$  of  $x$ ) width centered on the graph of  $g$ , Figure 1. For formal statements we rely on the notion in Definition 2. Informally, we obtain the following results ( $x$  is of length  $n$  and complexity  $K(x) = k$ ):

- Every non-increasing function  $\beta$  represents  $\beta_x$  for some  $x$ , and for every  $x$  the function  $\beta_x$  is represented by some  $\beta$ , provided  $\beta(k) = 0$ ,  $\beta(0) \leq n - k$ .
- Every function  $h$ , with non-increasing  $h(\alpha) + \alpha$ , represents  $h_x$  for some  $x$ , and for every  $x$  the function  $h_x$  is represented by some  $h$  as above, provided  $h(k) = 0$ ,  $h(0) \leq n$  (and by the non-increasing property  $h(0) \geq k$ ).
- $h_x(\alpha) + \alpha$  represents  $\beta_x(\alpha) + k$ , and conversely, for every  $x$ .
- For every  $x$  and  $\alpha$ , every minimal size set  $S \ni x$  of complexity at most  $\alpha' = \alpha + O(\log n)$ , has randomness deficiency  $\beta_x(\alpha') \leq \delta(x \mid S) \leq \beta_x(\alpha) + O(\log n)$ .

To provide precise statements we need a definition.

DEFINITION 2. Let  $f, g$  be functions defined on  $\{0, 1, \dots, k\}$  with values in  $\mathbb{N} \cup \{\infty\}$ . We say that  $f$  is  $(\varepsilon(i), \delta(i))$ -close to  $g$  (in symbols:  $f = \mathcal{E}(g)$ ) if

$$\begin{aligned} f(i) &\geq \min\{g(j) : j \in [\varepsilon(0), k], |j - i| \leq \varepsilon(i)\} - \delta(i), \\ f(i) &\leq \max\{g(j) : j \in [\varepsilon(0), k], |j - i| \leq \varepsilon(i)\} + \delta(i) \end{aligned}$$

for every  $i \in [\varepsilon(0), k]$ . If  $f = \mathcal{E}(g)$  and  $g = \mathcal{E}(f)$  we write  $f \cong g$ .

Here  $\varepsilon(i), \delta(i)$  are small values like  $O(\log n)$  when we consider data  $x$  of length  $n$ . Note that this definition is not symmetric and allows  $f(i)$  to have arbitrary values for  $i \in [0, \varepsilon(0))$ . However, it is transitive in the following sense: if  $f$  is  $(\varepsilon_1(i), \delta_1(i))$ -close to  $g$  and  $g$  is  $(\varepsilon_2(i), \delta_2(i))$ -close to  $h$  then  $f$  is  $(\varepsilon_1(i) + \varepsilon_2(i), \delta_1(i) + \delta_2(i))$ -close to  $h$ . If  $f = \mathcal{E}(g)$  and  $g$  is linear continuous, meaning that  $|g(i) - g(j)| \leq c|i - j|$  for some constant  $c$ , then the difference between  $f(i)$  and  $g(i)$  is bounded by  $c\varepsilon(i) + \delta(i)$  for every  $\varepsilon(0) \leq i \leq k$ .

It is instructive to consider the following example. Let  $g(i)$  be equal to  $2k - i$  for  $i = 0, 1, \dots, \frac{k}{2} - 1$  and to  $k - i$  for  $i = \frac{k}{2}, \dots, k$ . Let  $\varepsilon(i), \delta(i)$  be constant. Then a function  $f = \mathcal{E}(g)$  may take every value for  $i \in [0, \varepsilon)$ , every value in  $[2k - i - 2\delta, 2k - i + 2\delta]$  for  $i \in [\varepsilon, \frac{k}{2} - \delta]$ , every value in  $[k - i - \delta, 2k - i + \delta]$  for  $i \in (\frac{k}{2} - \delta, \frac{k}{2} + \delta]$ , and every value in  $[k - i - 2\delta, k - i + 2\delta]$  for  $i \in (\frac{k}{2} + \delta, k]$  (see Figure 1). Thus the point  $\frac{k}{2}$  of discontinuity of  $g$  gives an interval of size  $2\delta$  of large ambiguity of  $f$ . Loosely speaking the graph of  $f$  can be any function contained in the strip of radius  $2\delta$  whose middle line is the graph of  $g$ . For technical reasons it is convenient to use, in place of  $h_x$ , the MDL function  $\lambda_x$  (6). The definition of  $\lambda_x$  immediately implies the following properties:  $\lambda_x(\alpha)$  is non-increasing,  $\lambda_x(\alpha) \geq K(x) - O(1)$  for all  $\alpha$ . The next lemma shows that properties of  $\lambda_x$  translate directly into properties of  $h_x$  since  $h_x(\alpha)$  is always “close” to  $\lambda_x(\alpha) - \alpha$ .

LEMMA 1. For every  $x$  we have  $\lambda_x(\alpha) \leq h_x(\alpha) + \alpha \leq \lambda_x(\alpha) + K(\alpha) + O(1)$  for all  $\alpha$ . Hence  $\lambda_x(\alpha) \cong h_x(\alpha) + \alpha$  for  $\varepsilon = 0$ ,  $\delta = K(\alpha) + O(1)$ .

*Proof.* The inequality  $\lambda_x(\alpha) \leq h_x(\alpha) + \alpha$  is immediate. So it suffices to prove that  $h_x(\alpha) + \alpha \leq \lambda_x(\alpha) + K(\alpha) + O(1)$ . The proof of this inequality is based on the following:

CLAIM 1. Ignoring additive  $K(i)$  terms the function  $h_x(i) + i$  does not increase:

$$h_x(i_2) + i_2 \leq h_x(i_1) + i_1 + K(i_2 \mid i_1) + O(1) \quad (8)$$

for  $i_1 < i_2 \leq K(x)$ .

*Proof.* Let  $S$  be a finite set containing  $x$  with  $K(S) \leq i_1$  and  $\log |S| = h_x(i_1)$ . For every  $m \leq \log |S|$ , we can partition  $S$  into  $2^m$  equal-size parts and select the part  $S'$  containing  $x$ . Then,  $\log |S'| = \log |S| - m$  at the cost of increasing the complexity of  $S'$  to

$$K(S') \leq K(S) + m + K(m \mid K(S)) + O(1)$$

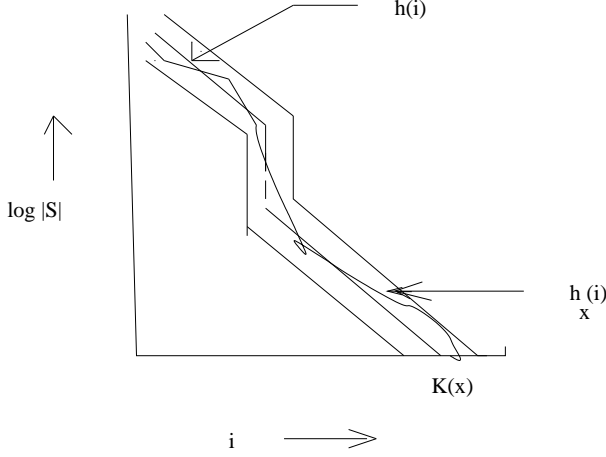


Figure 1: Structure function  $h_x(i)$  in strip determined by  $h(i)$ , that is,  $h_x(i) = \mathcal{E}(h(i))$ .

(we specify the part  $S'$  containing  $x$  by its index among all the parts). Choose

$$m = i_2 - K(S) - K(i_2 \mid K(S)) - c$$

for a constant  $c$  to be determined later. Note that

$$K(m \mid K(S)) \leq K(i_2, K(i_2 \mid K(S)) \mid K(S)) + K(c) + c' = K(i_2 \mid K(S)) + K(c) + c''$$

for appropriate constants  $c', c''$ . The complexity of the resulting set  $S'$  is thus at most

$$K(S) + i_2 - K(S) - K(i_2 \mid K(S)) - c + K(i_2 \mid K(S)) + K(c) + c'' \leq i_2,$$

provided  $c$  is chosen large enough. Hence,  $h_x(i_2) \leq \log |S'| = h_x(i_1) - m = h_x(i_1) - i_2 + K(S) + K(i_2 \mid K(S)) + c$ , and it suffices to prove that  $K(S) + K(i_2 \mid K(S)) \leq i_1 + K(i_2 \mid i_1) + O(1)$ . This follows from the bound  $K(i_2 \mid K(S)) \leq K(i_2 \mid i_1) + K(i_1 \mid K(S)) + O(1) \leq K(i_2 \mid i_1) + K(i_1 - K(S)) + O(1) \leq K(i_2 \mid i_1) + i_1 - K(S) + O(1)$ .  $\square$

Let  $S$  witness  $\lambda_x(\alpha)$ . Substituting  $K(S) = i_1$ ,  $\alpha = i_2$  in (8) we obtain:  $h_x(\alpha) + \alpha \leq h_x(K(S)) + K(S) + K(\alpha \mid K(S)) + O(1) \leq \Lambda(S) + K(\alpha) + O(1) = \lambda_x(\alpha) + K(\alpha) + O(1)$ .  $\square$

The lemma implies that the *same set* witnessing  $h_x(\alpha)$  also witnesses  $\lambda_x(\alpha)$  up to an additive term of  $K(\alpha)$ . The converse is only true for the smallest cardinality set witnessing  $\lambda_x(\alpha)$ . Without this restriction a counter example is: for random  $x \in \{0, 1\}^n$  the set  $S = \{0, 1\}^n$  witnesses  $\lambda_x(\frac{n}{2}) = n + O(K(n))$  but does not witness  $h_x(\frac{n}{2}) = \frac{n}{2} + O(K(n))$ . (If  $\lambda_x(\alpha) = K(x)$ , then every set of complexity  $\alpha' \leq \alpha$  witnessing  $\lambda_x(\alpha') = K(x)$  also witnesses  $\lambda_x(\alpha) = K(x)$ .)

The next two theorems state the main results of this work in a precise form. By  $K(i, n, \lambda)$  we mean the minimum length of a program that outputs  $n, i$ , and computes  $\lambda(j)$  given any  $j$  in the domain of  $\lambda$ .

**THEOREM 1.** (i) For every  $n$  and every string  $x$  of length  $n$  and complexity  $k$  there is an integer valued non-increasing function  $\lambda$  defined on  $[0, k]$  such that  $\lambda(0) \leq n$ ,  $\lambda(k) = k$  and  $\lambda_x = \mathcal{E}(\lambda)$  for  $\varepsilon = \delta = K(n) + O(1)$ .

(ii) Conversely, for every  $n$  and non-increasing integer valued function  $\lambda$  whose domain includes  $[0, k]$  and such that  $\lambda(0) \leq n$  and  $\lambda(k) = k$ , there is  $x$  of length  $n$  and complexity  $k \pm (K(k, n, \lambda) + O(1))$  such that  $\lambda_x = \mathcal{E}(\lambda)$  for  $\varepsilon = \delta = K(i, n, \lambda) + O(1)$ .

*Proof.* (i) We first observe that for every  $x$  of length  $n$  we have  $\lambda_x(K(n) + O(1)) \leq n + O(1)$ , as witnessed by  $S = \{0, 1\}^n$ . At the other extreme,  $\lambda_x(k + O(1)) = k + O(1)$ , as witnessed by  $S = \{x\}$ .



Define  $\lambda(i)$  by the equation  $\lambda(i) - k = \max\{0, \lambda_x(i + K(n) + O(1)) - k - O(1)\}$ . Then  $\lambda_x = \mathcal{E}(\lambda)$  with  $\varepsilon = \delta = K(n) + O(1)$ , and  $\lambda$  satisfies the requirements of Item (i) of the theorem.

(ii) Fix  $\lambda(i)$  satisfying the conditions in the theorem. It suffices to show that there is a string  $x$  of length  $n$  such that, for every  $i \in [0, k]$ , we have  $\lambda_x(i) \geq \lambda(i)$  and  $\lambda_x(i + \delta(i)) \leq \lambda(i) + \delta(i)$  for  $\delta(i) = K(i, n, \lambda) + O(1)$ . Then, with  $\delta = \delta(k)$ , we have  $K(x) \leq \lambda_x(k + \delta) + O(1) \leq \lambda(k) + \delta + O(1) = k + \delta + O(1)$ . And the inequality  $\lambda_x(k) \geq \lambda(k) = k$  implies that  $K(x) > k - O(1)$ .

**CLAIM 2.** For every length  $n$ , there is a string  $x$  of length  $n$  such that  $\lambda_x(i) \geq \lambda(i)$  for every  $i$  in the domain of  $\lambda$ .

*Proof.* Fix a length  $n$ . If  $\lambda_x(i) < \lambda(i)$  then  $x$  belongs to a set  $A$  with  $\Lambda(A) < \lambda(i) \leq \lambda(0) \leq n$ . The total number of elements in different such  $A$ 's is less than  $\sum_A 2^{n-K(A)} = 2^n \sum_A 2^{-K(A)} \leq 2^n$ , where the second inequality follows by (1).  $\square$

We prove Item (ii) by demonstrating that the lexicographically first  $x$ , as defined in Claim 2, also satisfies  $\lambda_x(i + \delta(i)) \leq \lambda(i) + \delta(i)$ , for  $\delta(i) = K(i, n, \lambda) + O(1)$  for all  $i \in [0, k]$ . It suffices to construct a set  $S \ni x$  of cardinality  $2^{\lambda(i)-i}$  and of complexity at most  $i + \delta(i)$ , for every  $i \in [0, k]$ .

For every fixed  $i \in [0, k]$  we can run the following:

**Algorithm:** Let  $A$  be a set variable initially containing all strings of length  $n$ , and let  $S$  be a set variable initially containing the  $2^{\lambda(i)-i}$  first strings of  $A$  in lexicographical order. Run all programs of length at most  $n$  dovetail style. Every time a program  $p$  of some length  $j$  halts,  $\lambda(j)$  is defined, and  $p$  prints a set  $B$  of cardinality at most  $2^{\lambda(j)-j}$ , we remove all the elements of  $B$  from  $A$  (but not from  $S$ ); we call a step at which this happens a  $j$ -step. Every time  $S \cap A$  becomes empty at a  $j$ -step, we replace the contents of  $S$  by the set of the  $2^{\lambda(i)-i}$  first strings in lexicographical order of (the current contents of)  $A$ . Possibly, the last replacement of  $S$  is incomplete because there are less than  $2^{\lambda(i)-i}$  elements left in  $A$ . It is easy to see that  $x \in S \setminus A$  just after the final replacement, and stays there forever after, even though some programs in the dovetailing process may still be running and elements from  $A$  may still be eliminated.

**CLAIM 3.** The contents of the set  $S$  is replaced at most  $2^{i+1}$  times.

*Proof.* There are two types of replacements that will be treated separately.

**Case 1:** Replacement of the current contents of  $S$  where at some  $j$ -step with  $j \leq i$  at least one element was removed from the current contents  $S \cap A$ . Trivially, the number of this type of replacements is bounded by the number of  $j$ -steps with  $j < i$ , and hence by the number of programs of length less than  $i$ , that is, by  $2^i$ .

**Case 2:** Replacement of the current contents of  $S$  where every one of the  $2^{\lambda(i)-i}$  elements of the current contents of  $S$  is removed from  $A$  by  $j$ -steps with  $j \geq i$ . Let us estimate the number of this type of replacements: Every element  $x$  removed at a  $j$ -step with  $j \geq i$  belongs to a set  $B$  with  $\Lambda(B) \leq \lambda(j) \leq \lambda(i)$ . The overall cumulative number of elements removed from  $A$  on  $j$ -steps with  $j \geq i$  is bounded by  $\sum_B 2^{\lambda(i)-K(B)} \leq 2^{\lambda(i)}$ , where the inequality follows by (1). Hence replacements of the second type can happen at most  $2^{\lambda(i)-(\lambda(i)-i)} = 2^i$  times.  $\square$

By Claim 3,  $S$  stabilizes after a certain number of  $j$ -steps. That number may be large. However, the number of replacements of  $S$  is small. The final set  $S \ni x$  has cardinality  $2^{\lambda(i)-i}$ , and can be specified by the number of replacements resulting in its current contents (as in Claim 3), and by  $i, n, \lambda$ . This shows that  $K(S) \leq i + K(i, n, \lambda) + O(1)$ .  $\square$

**REMARK 2.** The theorem implies that for every function  $h(i)$  such that the function  $\lambda(i) = h(i) + i$  satisfies the conditions of item (ii) there is an  $x$  such that  $h_x(i) = \mathcal{E}(h(i))$  with  $\varepsilon = \delta = O(K(i, n, h))$ .

**REMARK 3.** The proof of the theorem shows that for every function  $\lambda(i)$  satisfying the conditions of item (ii) there is  $x$  such that  $\lambda_x(i \mid n, \lambda) = \mathcal{E}(\lambda(i))$  with  $\varepsilon = \delta = K(i) + O(1)$  where the conditional structure function  $\lambda_x(i \mid y) = \min_S \{K(S \mid y) + \log |S| : S \ni x, K(S \mid y) \leq i\}$ . Consequently, for every function  $h(i)$  such that the function  $\lambda(i) = h(i) + i$  satisfies the conditions of item (ii) there is an  $x$  such that  $h_x(i \mid n, h) = \mathcal{E}(h(i))$  with  $\varepsilon = \delta = O(K(i))$  where the conditional structure function  $h_x(i \mid y) = \min_S \{\log |S| : S \ni x, K(S \mid y) \leq i\}$ .

REMARK 4. In the proof of Item (ii) of the theorem we can consider every finite set  $U$  with  $|U| \geq 2^n$  in place of the set  $A$  of all strings of length  $n$ . Then we obtain a string  $x \in U$  such that  $\lambda_x = \mathcal{E}(\lambda)$  with  $\varepsilon(i) = \delta(i) = K(i, U, \lambda)$ .

The following central result of this paper shows that the  $\lambda_x$  (equivalently  $h_x$ , by Lemma 1) and  $\beta_x$  can be expressed in one another but for a logarithmic additive error.

THEOREM 2. *For every  $x$  of length  $n$  and complexity  $k$  it holds  $\beta_x(\alpha) + k \cong \lambda_x(\alpha)$  for  $\varepsilon = \delta = O(\log n)$ .*

*Proof.* The statement of the theorem easily follows from the following two inequalities that are valid for every  $x$ , respectively every  $x$  of length  $n$  for the second one:

$$\beta_x(i) + k \leq \lambda_x(i) + O(1), \text{ for every } i \leq k; \text{ and} \quad (9)$$

$$\lambda_x(i + O(\log n)) \leq \beta_x(i) + k + O(\log n), \text{ for every } i \text{ satisfying } K(n) + O(1) \leq i \leq k. \quad (10)$$

It is convenient to rewrite the formula defining  $\delta(x \mid A)$  using the symmetry of information (2) as follows:

$$\delta(x \mid A) = \log |A| + K(A) - K(A \mid x^*) - k + O(1) = \Lambda(A) - K(A \mid x^*) - k + O(1). \quad (11)$$

Ad (9): This is easy, because for every set  $S \ni x$  witnessing  $\lambda_x(i)$  we have  $\delta(x \mid S) \leq \Lambda(S) - k + O(1) = \lambda_x(i) - k + O(1)$  and  $\beta_x(i) \leq \delta(x \mid S)$ .

Ad (10): This is more difficult. By (11) it suffices to prove that for every  $A \ni x$  there is an  $S \ni x$  with

$$\begin{aligned} K(S) &\leq K(A) + O(\log m), \\ \log |S| &\leq \log |A| - K(A \mid x) + O(\log m), \end{aligned}$$

where  $m = \Lambda(A)$ . Indeed for every  $A$  witnessing  $\beta_x(i)$  the set  $S$  will witness  $\lambda_x(i + O(\log n)) \leq \beta_x(i) + k + O(\log n)$  (note that  $m = \log |A| + K(A) = K(x \mid A^*) + \beta_x(i) + K(A) \leq 3n + O(\log n)$  provided  $i \geq K(n) + O(1)$ ). We will prove a more powerful statement also needed in the proof of Theorem 3:

LEMMA 2. *For every  $A \ni x$  there is  $S \ni x$  with  $K(S) \leq K(A) - K(A \mid x) + O(\log \Lambda(A))$  and  $\log |S| = \log |A|$  ( $\log n$  means here  $\lceil \log n \rceil$ ).*

*Proof.* Fix some  $A_0 \ni x$  and let  $m = \Lambda(A_0)$ . Our task is the following: Given  $K(A_0), \log |A_0|, K(A_0 \mid x)$ , to enumerate a family of at most  $2^{K(A_0) - K(A_0 \mid x) + O(\log m)}$  different sets  $S$  with  $\log |S| = \log |A_0|$  that cover all  $y$ 's covered by sets  $A$ , with  $K(A) = K(A_0)$ ,  $K(A \mid y) = K(A_0 \mid x)$  and  $\log |A| = \log |A_0|$ . Since the complexity of each enumerated  $S$  does not exceed  $K(A_0) - K(A_0 \mid x) + O(\log m) + K(K(A_0), \log |A_0|, K(A_0 \mid x)) + O(1) = K(A_0) - K(A_0 \mid x) + O(\log m)$  the lemma will be proved. The proof is by running the following:

**Algorithm:** Given  $K(A_0), \log |A_0|, K(A_0 \mid x)$  we run all programs dovetail style. We maintain auxiliary set-variables  $C, U, D$ , all of them initially  $\emptyset$ . Every time a new program  $p$  of length  $K(A_0)$  in the dovetailing process halts, with as output a set  $A$  with  $\log |A| = \log |A_0|$ , we execute the following steps:

**Step 1:** Update  $U := U \cup A$ .

**Step 2:** Update  $D := \{y \in U \setminus C: y \text{ is covered by at least } t = 2^{K(A_0 \mid x) - \delta} \text{ different generated } A\text{'s}\}$ , where  $\delta = O(\log m)$  will be defined later.

**Step 3:** This step is executed only if there is  $y \in D$  that is covered by at least  $2t$  different generated  $A$ 's. Enumerate as much new disjoint sets  $S$  as are needed to cover  $D$ : we just chop  $D$  into parts of size  $2^{\log |A_0|}$  (the last part may be incomplete) and name those parts the new sets  $S$ . Every time a new set  $S$  is enumerated, update  $C := C \cup S$ .

CLAIM 4. The string  $x$  is an element of some enumerated  $S$ , and the number of enumerated  $S$ 's is at most  $2^{K(A_0) - K(A_0 \mid x) + O(\log m)}$ .

*Proof.* By way of contradiction, assume that  $x$  is not an element of the enumerated  $S$ 's. Then there are less than  $2^{K(A_0|x)-\delta+1}$  different generated sets  $A$  such that  $x \in A$ . Every such  $A$  therefore satisfies  $K(A | x) \leq K(A_0 | x) - \delta + O(\log m) < K(A_0 | x)$  if  $\delta$  is chosen appropriately. Since  $A_0$  was certainly generated this is a contradiction.

It remains to show that we enumerated at most  $2^{K(A_0)-K(A_0|x)+O(\log m)}$  different  $S$ 's. Step 3 is executed only once per  $t$  executions of Step 1, and Step 1 is executed at most  $2^{K(A_0)}$  times. Therefore Step 3 is executed at most  $2^{K(A_0)}/t = 2^{K(A_0)-K(A_0|x)+\delta}$  times. The number of  $S$ 's formed from incomplete parts of  $D$ 's in Step 3 is thus at most  $2^{K(A_0)-K(A_0|x)+\delta}$ . Let us bound the number of  $S$ 's formed from complete parts of  $D$ 's. The total number of elements in different  $A$ 's generated is at most  $2^{K(A_0)+\log |A_0|}$  counting multiplicity. Therefore the number of elements in their union, having multiplicity  $2^{K(A_0|x)-\delta}$  or more, is at most  $2^{K(A_0)+\log |A_0|-K(A_0|x)+\delta}$ . Every  $S$  formed from a complete part of a set  $D$  in Step 3 accounts for  $2^{\log |A_0|}$  of them. Hence the number of  $S$ 's formed from complete parts of  $D$ 's is at most  $2^{K(A_0)-K(A_0|x)+\delta}$ .  $\square$

$\square$

$\square$

**COROLLARY 1.** *For every  $x$  of length  $n$  and complexity  $k \leq n$  there is a non-increasing function  $\beta$  such that  $\beta(0) \leq n - k$ ,  $\beta(k) = 0$  and  $\beta_x = \mathcal{E}(\beta)$  for  $\varepsilon, \delta = O(\log n)$ . Conversely, for every non-increasing function  $\beta$  such that  $\beta(0) \leq n - k$ ,  $\beta(k) = 0$  there is  $x$  of length  $n$  and complexity  $k \pm \delta$  such that  $\beta_x = \mathcal{E}(\beta)$  for  $\varepsilon = \delta = O(\log n) + K(\beta)$ .*

*Proof.* The first part is more or less immediate. Or use the first part of Theorem 1 and then let  $\beta(i) = \lambda(i) - k$ . To prove the second part, use the second part of Theorem 2, and the second part of Theorem 1 with  $\lambda(i) = \beta(i) + k$ .  $\square$

**REMARK 5.** We can see from the proof of Theorem 2 that for every  $S \ni x$  of complexity at most  $\alpha + O(\log n)$  minimizing  $\Lambda(S)$  it holds  $\delta(x | S) \leq \beta_x(\alpha) + O(\log n)$ . Ignoring  $O(\log n)$  terms, we see that at every complexity level, every best hypothesis at this level with respect to  $\Lambda(S)$  is also a best one with respect to typicality. This explains why it is worth to find shortest two-part descriptions for given data  $x$ : this is the single known way to find an  $S \ni x$  with respect to which  $x$  is as typical as it is possible at that complexity level. Note that the set  $\{(x, S, \beta) \mid x \in S, \delta(x | S) < \beta\}$  is not enumerable so we are not able to generate such  $S$ 's directly (Section 5).

The converse is not true: not every hypothesis, consisting of a finite set, witnessing  $\beta_x(\alpha)$  also witnesses  $\lambda_x(\alpha)$  or  $h_x(\alpha)$ . For example, let  $x$  be a string of length  $n$  with  $K(x) \geq n$ . Let  $S_1 = \{0, 1\}^n \cup \{y\}$  where  $y$  is a string of length  $\frac{n}{2}$  such that  $K(x, y) \geq \frac{3n}{2}$  and let  $S_2 = \{0, 1\}^n$ . Then both  $S_1, S_2$  witness  $\beta_x(\frac{n}{2} + O(\log n)) = O(1)$  but  $\Lambda(S_1) = \frac{3n}{2} + O(\log n) \gg \lambda_x(\frac{n}{2} + O(\log n)) = n + O(\log n)$  while  $\log |S_2| = n \gg h_x(\frac{n}{2} + O(\log n)) = \frac{n}{2} + O(\log n)$ .

However, for every  $\alpha$  such that  $\lambda_x(i)$  decreases when  $i \rightarrow \alpha$  with  $i \leq \alpha$ , a witness set for  $\beta_x(\alpha)$  is also a witness set for  $\lambda_x(\alpha)$  and  $h_x(\alpha)$ . We will call such  $\alpha$  *critical* (with respect to  $x$ ): these are the model complexities at which the two-part MDL code-length decreases, while it is stable in between such critical points. We measure the criticality of  $\alpha$  by the function  $s_{x,\alpha}(\delta)$  defined as follows.

**DEFINITION 3.** *Let*

$$s_{x,\alpha}(\delta) = \max\{\varepsilon : \lambda_x(\alpha - \varepsilon) \leq \lambda_x(\alpha) + \delta\}$$

The function  $s_{x,\alpha}(\delta)$  does not decrease and the speed of its growth on small positive  $\delta$  measures the criticality of  $\alpha$ : the slower  $s_{x,\alpha}(\delta)$  increases, the more  $\alpha$  is critical. For critical  $\alpha$ , if  $\lambda_x(\alpha_1)$  is close to  $\lambda_x(\alpha)$  then  $\alpha_1$  is close to  $\alpha$ . More specifically,  $\alpha - \alpha_1 \leq s_{x,\alpha}(\lambda_x(\alpha_1) - \lambda_x(\alpha))$ .

The next theorem shows, for critical  $\alpha$ , that for every  $S \ni x$  with  $K(S) \approx \alpha$  and  $\delta(x | S) \approx \beta_x(\alpha)$ , we have  $\log |S| \approx h_x(\alpha)$  and  $\Lambda(S) \approx \lambda_x(\alpha)$ .

**THEOREM 3.** *Let  $x \in S$ , and let  $\Delta = \delta(x | S) - \beta_x(\alpha) + O(\log \Lambda(S))$ . Then,  $\log |S| \leq h_x(\alpha) + s_{x,\alpha}(\Delta) + \Delta$  and  $\Lambda(S) \leq \lambda_x(\alpha) + s_{x,\alpha}(\Delta) + \Delta + K(x) - \alpha$ .*

*Proof.* Let  $m = \Lambda(A)$ . By Lemma 2 we have

$$\lambda_x(K(A) - K(A | x) + O(\log m)) \leq \Lambda(A) - K(A | x) + O(\log m).$$

By (11) this implies  $\lambda_x(\delta(x | A) + k - \log |A| + O(\log m)) \leq \delta(x | A) + k + O(\log m)$ , and  $\lambda_x(\beta_x(\alpha) + \Delta + k - \log |A|) \leq \beta_x(\alpha) + \Delta + k$ , where  $\Delta = \delta(x | A) - \beta_x(\alpha) + O(\log m)$ . Hence

$$\lambda_x(\lambda_x(\alpha) + \Delta - \log |A|) \leq \lambda_x(\alpha) + \Delta.$$

By definition of  $s_{x\alpha}$  this implies

$$s_{x\alpha}(\Delta) \geq \alpha - (\lambda_x(\alpha) + \Delta - \log |A|) = \log |A| - (\lambda_x(\alpha) - \alpha + \Delta)$$

and

$$\log |A| \leq \lambda_x(\alpha) - \alpha + \Delta + s(\Delta) \leq h_x(\alpha) + \Delta + s(\Delta) + O(1).$$

□

**EXAMPLE 2. “Snooping Curves” for Logarithmic Loss:** In [24] the notion of a “snooping curve” of  $x$ ,  $L_x(\alpha) = \min_{K(P) \leq \alpha} \text{Loss}_P(x)$  was introduced. The minimum is taken over all prediction strategies of complexity at most  $\alpha$ . A prediction strategy  $P$  is a mapping from the set of strings of length less than  $|x|$  into the set of rational numbers in the segment  $[0, 1]$ . The value  $P(x_1 \dots x_i)$  is regarded as our belief (or probability) that  $x_{i+1} = 1$  after we have observed  $x_1, \dots, x_i$ . If the actual bit  $x_{i+1}$  is 1 the strategy suffers the loss  $-\log p$  otherwise  $-\log(1 - p)$ . The strategy is a finite object and  $K(P)$  may be defined as the complexity of this object, or as the minimum size of a program that identifies  $n = |x|$  and given  $y$  finds  $P(y)$ . The notation  $\text{Loss}_P(x)$  indicates the total loss of  $P$  on  $x$ , i.e. the sum of all  $n$  losses:  $\text{Loss}_P(x) = \sum_{i=0}^{|x|-1} (-\log |P(x_1 \dots x_i) - 1 + x_{i+1}|)$ .

A result of [24] describes possible shapes of  $L_x$  but only for  $\alpha = o(n)$ . Here we show that

**LEMMA 3.**  $L_x(\alpha \pm O(\log n)) = h_x(\alpha \pm O(\log n))$  for every  $x$  and  $\alpha$ . Thus, Lemma 1 and Theorem 1 describes also the coarse shape of all possible snooping curves for all  $\alpha \leq n$ .

*Proof.* ( $\leq$ ) A given finite set  $A$  of binary strings of length  $n$  can be identified with the following prediction strategy  $P$ : Having read the prefix  $y$  of  $x$  it outputs  $p = |A_{y1}|/|A_y|$  where  $A_y$  stands for the number of strings in  $A$  having prefix  $y$ .

It is easily seen, by induction, that  $\text{Loss}_P(y) = \log(|A|/|A_y|)$  for every  $y$ . Therefore,  $\text{Loss}_P(x) = \log |A|$  for every  $x \in A$ . Since  $P$  corresponds to  $A$  in the sense that  $K(P | A) = O(1)$ , we obtain  $L_x(\alpha + O(\log n)) \leq h_x(\alpha)$ . The term  $O(\log n)$  is required, because the initial set of complexity  $\alpha$  might contain strings of different lengths while we need to know  $n$  to get rid of the strings of lengths different from  $n$ .

( $\geq$ ) Conversely, assume that  $\text{Loss}_P(x) \leq m$ . Let  $A = \{x \in \{0, 1\}^n : \text{Loss}_P(x) \leq m\}$ . Since  $\sum_{|x|=n} 2^{-\text{Loss}_P(x)} = 1$  (proof by induction on  $n$ ), and  $2^{-\text{Loss}_P(x)} \geq 2^{-m}$  for every  $x \in A$ , we can conclude that  $A$  has at most  $2^m$  elements. Since  $K(A | P) = O(\log m)$ , we obtain  $h_x(\alpha + O(\log n)) \leq L_x(\alpha)$ . □

◇

**EXAMPLE 3. Foundations of MDL:** (i) Given a set  $S \ni x$  such that  $K(S)$  is small and  $|S|$  is small, we can find a simple strategy to predict bits of  $x$  (Example 2). Interpreting “to explain” as “to be able to predict well”, MDL in the sense of  $\lambda_x(\alpha)$  is about  $\Lambda(S)$  with  $K(S) \leq \alpha$  gives indeed a good explanation.

(ii) If  $K(S)$  is small and  $|S|$  is small then the data has small randomness deficiency with respect to  $S$ , and our intuition says that every simple  $S$  with a small randomness deficiency is a good explanation of  $x$ . (There is a theorem (by V. Vovk) supporting the latter intuition: if  $x$  is random with respect to a simple unknown measure  $\mu$  and both  $K(S)$  and  $\delta(x | S)$  are small, then  $S$  may be used to predict bits of  $x$  using preceding bits almost as well as if we knew  $\mu$ . Example 2 together with Theorem 5 Item (iii) gives an independent proof of Vovk’s result.)

(iii) In statistical applications of MDL [16, 1], MML [25], and related methods, one selects the model that minimizes the sum of the model code length and the data-to-model code length; in modern versions one chooses a model class first and then minimizes the data-to-model code length. In Lemma 1 we have shown that these methods are almost equivalent at all levels of model-complexity constraints. Theorem 2 clarifies questions left by [19]: under certain conditions ultimate compression of the two-part code may be achieved by a model for which the data is not typical. Consider the generalization of the finite set case to computable Bernoulli processes with bias  $p$  for outcome “1” ( $0 \leq p \leq 1$ ), and the data is  $n$  outcomes  $x = 00 \dots 0$ . In the spirit of MDL we look for the model minimizing the codelength of the model plus data. We can shortly encode the model  $p = \frac{1}{2}$  in  $O(1)$  bits, and compress the data code to  $K(x | n) = O(1)$  bits. But we find about the same code length if we take  $p = 0$ . Thus we have no basis to distinguish between the two, while obviously the second possibility is preferable. This shows that ultimate compression of the two-part code may result in a model for which the data has maximal randomness deficiency ( $-\log P(x) - K(x | n) = n$  for  $p = \frac{1}{2}$ ) and hence is maximally atypical. However, the data-to-model code for the model  $p = \frac{1}{2}$  is  $-\log(\frac{1}{2})^n = n$  bits, while  $p = 0$  results  $-\log 1^n = 0$  bits. Choosing the shortest data-to-model code results in the minimal randomness deficiency, as predicted by (the generalization to probability distributions of) Theorem 2.

(iv) Another question arising in MDL is its performance if the true model is not part of the used model class. In parametric estimation such complexity constraints arise if we restrict modeling of  $2k$ -parameter data to  $k$ -parameter models. Again, Theorem 2 shows that within these constraints we still select the  $k$ -parameter model for which the data is maximally typical. This is particularly significant for data  $x$  if the allowed complexity  $\alpha$  is significantly below the complexity of the Kolmogorov minimal sufficient statistic, that is, if  $h_x(\alpha) + \alpha \gg K(x) + c$ . This situation is potentially common, Example 4.  $\diamond$

**EXAMPLE 4. Non-stochastic objects:** The existence of non-stochastic objects, in the form of strings  $x$  of length  $n$  and complexity  $k \leq n + K(n)$  was established in [17] for  $\alpha \leq \frac{n}{2}$  and in [9] for  $\alpha = n - O(1)$ . Theorem 1 establishes the following: For every length  $n$  and complexity  $k \leq n + K(n) + O(1)$  (the maximal complexity) there are strings of that length and complexity that have a Kolmogorov minimal sufficient statistics of every complexity  $\alpha = \Theta(\log n), \dots, k/\Theta(\log n)$ . That is, for every complexity  $k$  and every level of nonstochasticity  $\alpha \leq k$ , there are strings of complexity  $k$  that are non-stochastic at level  $\alpha$  (up to a logarithmic additive term). (Continued in Example 8.)  $\diamond$

### 3 Realizing the Structure Function

We give a characterization of the finite sets witnessing  $\lambda_x$ , at all levels of model complexity, in terms of indexes of  $x$  in the enumeration of strings of given complexity, in terms of the “coarse” equivalence of Section 2. This extends a technique introduced in [9].

**DEFINITION 4.** Let  $N^l$  denote the number of strings of complexity at most  $l$ , and let  $|N^l|$  denote the length of the binary notation of  $N^l$ . For  $i \leq |N^l|$  let  $N_i^l$  stand for  $i$  most significant bits of binary notation of  $N^l$ . Let  $D$  denote the set of all pairs  $\langle x, l \rangle \mid K(x) \leq l$ . Fix an enumeration of  $D$  and denote by  $I_x^l$  the minimum index of a pair  $\langle x, i \rangle$  with  $i \leq l$  in that enumeration, that is, the number of pairs enumerated before  $\langle x, i \rangle$  (if  $K(x) > l$  then  $I_x^l = \infty$ ). Let  $m_x^l$  denote the maximal common prefix of binary notations of  $I_x^l$  and  $N^l$ , that is,  $I_x^l = m_x^l 0 * \dots *$  and  $N^l = m_x^l 1 * \dots *$  (we assume here that binary notation of  $I_x^l$  is written in exactly  $|N^l|$  bits with leading zeros if necessary).

(In [9] the notation  $m_x$  is used for  $m_x^l$  with  $l = K(x)$ .)

**THEOREM 4.** For every  $i \leq l$ , the number  $N_i^l$  is algorithmically equivalent to  $N^i$ , that is,  $K(N^i \mid N_i^l), K(N_i^l \mid N^i) = O(\log l)$ .

*Proof.* We first show that  $|m_x^l| \leq K(x) + O(\log l)$  for every  $x$  with  $K(x) \leq l$ . Indeed, given  $x, l$ ,  $|m_x^l|$  and the  $|N^l| - |m_x^l|$  least significant bits of  $N^l$  we can find  $N^l$ : find  $I_x^l$  by enumerating  $D$  until a pair  $\langle x, i \rangle$  with  $i \leq l$  appears and then complete  $m_x^l$  by using the  $|m_x^l|$  most significant bits of the binary representation of  $I_x^l$ . Given  $l$  and  $N^l$  we can find, using a constant-length program, the lexicographically first string not in  $N^l$ . By construction, this string has complexity at least  $l+1$ . Then,

$l \leq K(N^l) + O(\log l) \leq K(x) + |N^l| - |m_x^l| + O(\log l) \leq K(x) + l - |m_x^l| + O(\log l)$  (use  $|N^l| \leq l + O(1)$ ). Thus,  $|m_x^l| \leq K(x) + O(\log l)$ .

Let  $x$  be the string of complexity at most  $i$  with maximum  $I_x^l$ . Given  $m_x^l$  and  $i, l, |N^l|$  we can find all strings of complexity at most  $i$  by enumerating  $D$  until  $N$  pairs  $\langle y, j \rangle$  with  $j \leq l$  appear, where  $N$  is the number whose binary representation has prefix  $m_x^l 1$  and then  $(|N^l| - |m_x^l| - 1)$  zeros. Since  $|m_x^l| \leq i + O(\log l)$ , this proves  $K(N^i | N_i^l) = O(\log l)$ . Since  $K(N^i) \geq i - O(\log i) \geq K(N_i^l) - O(\log i)$  we have  $K(N_i^l | N^i) = O(\log l)$ .  $\square$

Before to proceed to the main theorem of this section we introduce some more notation.

**DEFINITION 5.** For  $i \leq l$  let  $S_i^l$  denote the set of all strings  $y$  such that the binary notation of  $I_y^l$  has the form  $N_i^l 0 * \dots *$  (we assume here that binary notations of indexes are written using exactly  $|N^l|$  bits.)

Let  $c$  denote a constant such that  $K(x) \leq \Lambda(S) + c$  for every  $x \in S$ . The following theorem shows that sets  $S_i^l$  form a universal family of statistics for  $x$ .

**THEOREM 5.** (i) If the  $(i + 1)$ st most significant bit of  $N^l$  is 1 then  $|S_i^l| = 2^{|N^l| - i - 1}$  and  $S_i^l$  is algorithmically equivalent to  $N_i^l$ , that is  $K(N_i^l | S_i^l), K(S_i^l | N_i^l) = O(\log l)$ .

(ii) For every  $S$  and every  $x \in S$ , let  $l = \Lambda(S) + c$  and  $i = |m_x^l|$ . Then  $x \in S_i^l$ ,  $K(S_i^l | S) = O(\log l)$ ,  $K(S_i^l) = i + O(\log l) \leq K(S) + O(\log l)$ , and  $\Lambda(S_i^l) \leq \Lambda(S) + O(\log l)$  (that is,  $S_i^l$  is not worse than  $S$ , as a model explaining  $x$ ).

(iii) If  $\alpha$  is critical then every  $S$  witnessing  $\lambda_x(\alpha)$  is algorithmically equivalent to  $N^\alpha$ . More specifically, for every  $S \ni x$ ,

$$K(N^\alpha | S) \leq \max\{0, \Lambda(S) - \lambda_x(\alpha) + O(\log l)\} + O(\log l)$$

and

$$K(S | N^\alpha) \leq \max\{0, s_{x,\alpha}(\Lambda(S) - \lambda_x(\alpha) + O(\log l))\} + K(S) - \alpha + O(\log l),$$

where  $l = \Lambda(S) + c$ .

*Proof.* (i) If the  $(i + 1)$ st most significant bit of  $N^l$  is “1,” then all the numbers with binary representation of the form  $N_i^l 0 * \dots *$  are used as indexes of some  $y$  with  $K(y) \leq l$ , that is,  $S_i^l$  has exactly  $2^{|N^l| - i - 1}$  elements. We can find  $S_i^l$  given  $l, i, |N^l|$  and  $N_i^l$  by enumerating all its elements. On the other hand,  $N_i^l$  can be found given  $S_i^l$  and  $i, l$  as the first  $i$  bits of  $I_x^l$  for every  $x \in S_i^l$ .

(ii) Since  $i = |m_x^l|$ , the length of the longest common prefix of binary representation of  $I_x^l$  and  $N^l$  has the form  $N_i^l 0 * \dots *$  and the  $(i + 1)$ st most significant bit of  $N^l$  is 1. In particular,  $x \in S_i^l$ .

Let  $J = \max\{I_y^l | y \in S\}$ . As  $x \in S$ , we have  $J \geq I_x^l$ . We can find  $N_i^l$  given  $i, l$  and  $S$  by finding  $J$  and taking the  $i$  first bits of  $J$ . Given  $N_i^l$  we can find  $S_i^l$ . Hence  $K(S_i^l | S) = O(\log l)$ . Therefore  $K(S_i^l) \leq K(S) + O(\log l)$ . By Item (i) and by previous theorem we have  $K(S_i^l) = i + O(\log l)$ . Again by Item (i) we have  $\Lambda(S_i^l) \leq l + O(\log l) = \Lambda(S) + O(\log l)$ .

(iii) Let  $i = |m_x^l|$ . We distinguish two cases.

**Case 1:**  $i \geq \alpha$ . Then  $K(N^\alpha | S) \leq K(N^\alpha | S_i^l) + O(\log l) \leq K(N^\alpha | N^i) + O(\log l) = O(\log l)$ . And  $K(S | N^\alpha) = K(S) - K(N^\alpha) + O(\log l) = K(S) - \alpha + O(\log l)$ .

**Case 2:**  $i < \alpha$ . Let us upper bound  $K(N^\alpha | S)$  and  $K(S | N^\alpha)$  in terms of  $K(S_i^l)$ . We have

$$K(N^\alpha | S) \leq K(N^\alpha | S_i^l) + O(\log l) = K(N^\alpha) - K(S_i^l) + O(\log l) = \alpha - K(S_i^l) + O(\log l)$$

and

$$K(S | N^\alpha) \leq K(S | S_i^l) + O(\log l) = K(S) - K(S_i^l) + O(\log l).$$

By Theorem 5 Item (ii) we have  $\lambda_x(K(S_i^l) + O(\log l)) \leq \Lambda(S) + O(\log l)$ . Therefore, if  $\Lambda(S)$  is close to  $\lambda_x(\alpha)$  and  $s_{x,\alpha}$  grows slowly then  $K(S_i^l)$  is close to  $\alpha$  hence  $K(N^\alpha | S)$  is small. If, moreover,  $K(S)$  is close to  $\alpha$  then  $K(S | N^\alpha)$  is small. The details follow: We have

$$\alpha - K(S_i^l) - O(\log l) \leq s_{x,\alpha}(\Lambda(S) + O(\log l) - \lambda_x(\alpha)).$$

This implies

$$K(N^\alpha | S) \leq s_{x,\alpha}(\Lambda(S) + O(\log l) - \lambda_x(\alpha)) + O(\log l)$$

and

$$K(S \mid N^\alpha) \leq K(S) - K(S_i^l) + O(\log l) \leq s_{x,\alpha}(\Lambda(S) + O(\log l) - \lambda_x(\alpha)) + O(\log l) + (K(S) - \alpha).$$

□

Note that Item (iii) of the theorem does not hold for non-critical points. For instance, for a random string  $x$  of length  $n$  there are independent  $S_1, S_2$  witnessing  $\lambda_x(\frac{n}{2}) = n$ : let  $S_1$  be the set of all  $x'$  of length  $n$  having the same prefix of length  $\frac{n}{2}$  as  $x$  and  $S_2$  be the set of all  $x'$  of length  $n$  having the same suffix of length  $\frac{n}{2}$  as  $x$ .

**COROLLARY 2.** *Let  $x$  be a string of length  $n$  and complexity  $k$ . For every  $K(n) + O(1) \leq \alpha \leq k$  there is  $l \leq n + K(n) + O(1)$  such that the set  $S_\alpha^l$  both contains  $x$  and witnesses  $h_x(\alpha)$ ,  $\lambda_x(\alpha)$ , and  $\beta_x(\alpha)$ , up to an  $O(\log n)$  additive term in the argument and value.*

## 4 Fine Structure and Sufficient Statistic

Above, we looked at the coarse shape of the structure function, but not at the fine detail. We show that  $h_x$  coming from infinity drops to the sufficiency line  $L$  defined by  $L(\alpha) + \alpha = K(x)$ . It first touches this line for a model complexity related to the information in the  $x$  about the halting problem. It then touches this line a number of times (bounded by a universal constant) and in between moves slightly (logarithmically) away in little bumps.

**Initial behavior:** Let  $x$  be a string of complexity  $K(x) = k$ . The structure function  $h_x(\alpha)$  defined by (4) rises sharply above the sufficiency line for very small values of  $\alpha$ . Let  $BB(k)$  denote maximal string of complexity  $k$  or less (with respect to lexicographical order on strings):  $BB(k) = \max\{y : K(y) \leq k\}$ . As in [12], define

$$m(x) = \min_y \{K(y) : y \geq x\}, \quad (12)$$

the minimum complexity of a natural number greater than  $x$ —that is,  $m(x)$  is the greatest monotonic non-decreasing lower bound on  $K(x)$ . Then, we naturally define the inverse of  $BB()$  as  $BB^{-1}(x) = m(x)$ .

For  $\alpha \in [0, BB^{-1}(x) - O(1))$  we have  $h_x(\alpha) = \infty$ : For a set  $S \ni x$  with  $K(S) = \alpha$  we can consider the largest element  $y$  of  $S$ . Then  $y+1$  has complexity  $\alpha + O(1) < BB^{-1}(x)$ , that is,  $K(y+1) < BB^{-1}(x)$ , which implies that  $y < x$ . But then  $x \notin S$  which is a contradiction.

**Sufficient Statistic:** A sufficient statistic of the data contains all information in the data about the model. In introducing the notion of sufficiency in classical statistics, Fisher [6] stated: “The statistic chosen should summarize the whole of the relevant information supplied by the sample. This may be called the Criterion of Sufficiency . . . In the case of the normal curve of distribution it is evident that the second moment is a sufficient statistic for estimating the standard deviation.” For the classical (probabilistic) theory see, for example, [5]. In [9] an algorithmic theory of sufficient statistic (relating individual data to individual model) was developed and its relation with the probabilistic version established. The algorithmic basics are as follows: Intuitively, a model expresses the essence of the data if the two-part code describing the data consisting of the model and the data-to-model code is as concise as the best one-part description. Formally:

**DEFINITION 6.** A finite set  $S$  containing  $x$  is *optimal* for  $x$  if

$$\Lambda(S) \leq K(x) + c. \quad (13)$$

Here  $c$  is some small value, constant or logarithmic in  $K(x)$ , depending on the context. A minimal length description  $S^*$  of such an optimal set is called a *sufficient statistic* for  $x$ . To specify the value of  $c$  we will say *c-optimal* and *c-sufficient*.

If a set  $S$  is  $c$ -optimal with  $c$  constant, then by (5) we have  $K(x) - c_2 \leq \Lambda(S) \leq K(x) + c$ . Hence, with respect to the structure function  $\lambda_x(\alpha)$  we can state that all optimal sets  $S$  and only those, cause the function  $\lambda_x$  to drop to its minimal possible value  $K(x)$ . We know that this happens for at least one set,  $\{x\}$  of complexity  $K(x) + O(1)$ .

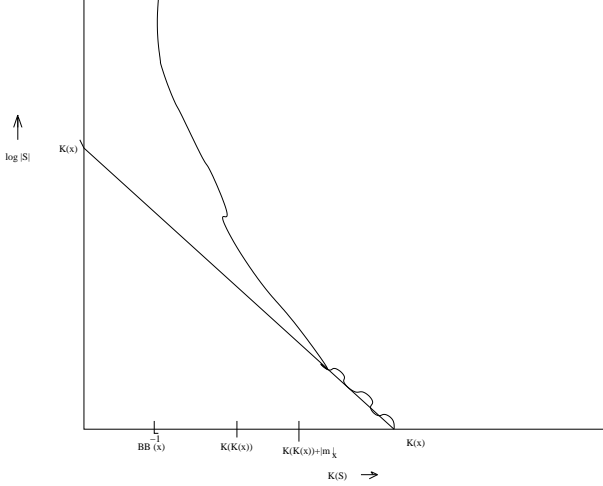


Figure 2: Kolmogorov structure function

We are interested in finding optimal sets that have low complexity. Those having minimal complexity are called *minimal optimal sets* (and their programs *minimal sufficient statistics*). To be rigorous we should say minimal among  $c$ -optimal. We know from [9] that the complexity of a minimal optimal set is at least  $K(K(x))$ , up to a fixed additive constant, for every  $x$ . So for smaller arguments the structure function definitively rises above the sufficiency line. We also know that for every  $n$  there are so-called *non-stochastic* objects  $x$  of length  $n$  that have minimal sufficient statistics of high complexity only. For example, there are  $x$  of complexity  $K(x | n^*) = n + O(1)$  such that every minimum sufficient statistic  $S$  has also complexity  $K(S | n^*) = n + O(1)$ , hence by the conditional version  $K(S | n^*) + \log |S| = K(x | n^*) + O(1)$  of (13) we find  $|S|$  is bounded by a fixed universal constant. This shows that  $S = \{x\} \cup S'$  and for every one of the constant number of elements  $y \in S'$  we have  $K(y | x) = O(1)$ . Clearly, for every object  $x$ , the function  $h_x$  is above the sufficiency line for the entire interval  $[0, \alpha_0]$  where  $\alpha_0$  is the complexity of the minimal sufficient statistic.

**EXAMPLE 5. Bumps in the Structure Function:** Consider  $x \in \{0, 1\}^n$  with  $K(x | n) = n + O(1)$  and the conditional variant  $h_x(\alpha | y) = \min_S \{\log |S| : S \ni x, |S| < \infty, K(S | y) \leq \alpha\}$  of (4). Since  $S_1 = \{0, 1\}^n$  is a set containing  $x$  and can be described by  $O(1)$  bits (given  $n$ ), we find  $h_x(\alpha | n) \leq n + O(1)$  for  $\alpha = K(S_1 | n) = O(1)$ . For increasing  $\alpha$ , the size of a set  $S \ni x$ , one can describe in  $\alpha$  bits, decreases monotonically until for some  $\alpha_0$  we obtain a first set  $S_0$  witnessing  $h_x(\alpha_0 | n) + \alpha_0 = K(x | n) + O(1)$ . Then,  $S_0$  is a minimal-complexity optimal set for  $x$ , and  $S_0^*$  is a minimal sufficient statistic for  $x$ . Further increase of  $\alpha$  halves the set  $S$  for each additional bit of  $\alpha$  until  $\alpha = K(x | n)$ . In other words, for every increment  $d$  we have  $h_x(\alpha_0 + d | n) = K(x | n) - (\alpha_0 + d + O(\log d))$ , provided the right-hand side is non-negative, and 0 otherwise. Namely, once we have an optimal set  $S_0$  we can subdivide it in a standard way into  $2^d$  parts and take as new set  $S$  the part containing  $x$ . The  $O(\log d)$  term is due to the fact that we have to consider self-delimiting encodings of  $d$ . This additive term is there to stay, it cannot be eliminated, Lemma 4. For  $\alpha \geq K(x | n)$  obviously the smallest set  $S$  containing  $x$  that one can describe using  $\alpha$  bits (given  $n$ ) is the singleton set  $S = \{x\}$ . The same analysis can be given for the unconditional version  $h_x(\alpha)$  of the structure function, which behaves the same except for possibly the small initial part  $\alpha \in [0, K(n))$  where the complexity is too small to specify the set  $S_1 = \{0, 1\}^n$ , see the initial part of Section 4.

The little bumps in the sufficient statistic region  $[K(K(x)), K(x)]$  in Figure 2 are due to the boundedness of the number of sufficient statistics.

**LEMMA 4.** *For every sub-interval of length  $2^d$  in  $[0, K(x))$  there is at least one value  $\alpha$  for which  $h_x(\alpha)$  exceeds the sufficiency line by  $d - O(1)$ . Let  $\alpha_0$  be the least value  $\alpha$  so that  $h_x(\alpha) + \alpha = K(x) + O(1)$ , the complexity of the minimal sufficient statistic. Then, in particular, in the interval  $[\alpha_0, K(x))$  there is an  $\alpha$  where this excess is about  $\log(K(x) - \alpha_0)$ . The excess cannot be significantly more on this*



interval.

*Proof.* There are at most  $2^{c+O(1)}$  arguments  $\alpha$  with  $K(S) = \alpha$  and  $K(S) + \log |S| \leq K(x) + c$  (as established above). So for every set of  $2^d$  arguments such that  $d > c + O(1)$  there is at least one argument  $\alpha$  such that no set  $S$  of complexity  $\alpha$  is  $c$ -optimal. That the excess cannot significantly more on the interval  $[\alpha_0, K(x))$  was shown above in this Example 5.  $\square$

$\diamond$

**EXAMPLE 6. Sufficient Statistic:** Let us look at a coin toss example. Let  $k$  be a number in the range  $0, 1, \dots, n$  of complexity  $\log n + O(1)$  given  $n$  and let  $x$  be a string of length  $n$  having  $k$  ones of complexity  $K(x | n, k) \geq \log \binom{n}{k}$  given  $n, k$ . This  $x$  can be viewed as a typical result of tossing a coin with a bias about  $k$ . A two-part description of  $x$  is given by the number  $k$  of 1's in  $x$  first, followed by the index  $j \leq \log |S|$  of  $x$  in the set  $S$  of strings of length  $n$  with  $k$  1's. This set is optimal, since  $K(x | n) = K(x, k | n) = K(k | n) + K(x | k, n) = K(S) + \log |S|$ .  $\diamond$

**EXAMPLE 7. Hierarchy of Sufficient Statistics:** All the information in the picture is described by a binary string  $x$  of length  $n = ml$ . Chop  $x$  into  $l$  substrings  $x_i$  ( $1 \leq i \leq l$ ) of equal length  $m$  each. Let  $k_i$  denote the number of ones in  $x_i$ . Each such substring metaphorically represents a patch of, say, color. The intended color, say “cobalt blue”, is indicated by the number of ones in the substring. The actual color depicted may be typical cobalt blue or less typical cobalt blue. The smaller the randomness deficiency of substring  $x_i$  in the set of all strings of length  $m$  containing precisely  $k_i$  ones, the more typical  $x_i$  is, the better it achieves a typical cobalt blue color. The metaphorical “image” depicted by  $x$  is  $\pi(x)$ , defined as the string  $k_1 k_2 \dots k_l$  over the alphabet  $\{0, 1, \dots, m\}$ , the set of colors available. We can now consider several statistics for  $x$ .

Let  $X \subseteq \{0, 1, \dots, m\}^l$  (the set of possible realizations of the target image), and let  $Y_i$  for  $i = 0, 1, \dots, m$  be the set of binary strings of length  $m$  with  $i$  ones (the set of realizations of target color  $i$ ). Consider the set

$$S = \{y : \pi(y) \in X, y_i \in Y_{k_i} \text{ for all } i = 1, \dots, l\}$$

One possible application of these ideas are to gauge how good the picture is with respect to the given summarizing set  $S$ . Assume that  $x \in S$ . The set  $S$  is then a statistic for  $x$  that captures both the colors of the patches and the image, that is, the total picture. If the randomness deficiency  $\delta(x | S)$  is small, then  $S$  is a sufficient statistic of  $x$ . This means that  $x$  perfectly expresses the meaning aimed for by the image and the true color aimed for in everyone of the color patches.

Another possible application of the theory is to find a good summarization of the meaningful information in a given picture. Let  $x$  be a string, and let  $S \ni x$  be the set above that has all the randomness deficiencies equal zero. Clearly,  $S$  summarizes the relevant information in  $x$  since it captures both image and coloring, that is, the total picture. But we can distinguish more sufficient statistics. The set

$$S_1 = \{y : \pi(y) \in X\}$$

is a statistic that captures only the image. It can be sufficient only if all colors used in the picture  $x$  are typical (have small randomness deficiency). The set

$$S_2 = \{y : y_i \in Y_{k_i} \text{ for all } i = 1, \dots, l\}$$

is a statistic that captures the color information in the picture. It can be sufficient only if the image is typical. Finally the set

$$A_i = \{y : y_i \in Y_{k_i}\}$$

is a statistic that captures only color of patch  $y_i$  in the picture. It can be sufficient only if  $K(i) \approx 0$  and all the other color applications and the image are typical.  $\diamond$

EXAMPLE 8. **“Positive” and “Negative” Individual Randomness:** (Continuing Example 4.) In [9] these results were sharpened to show the existence of strings for which essentially the singleton set consisting of the string itself is a minimal sufficient statistic. While a sufficient statistic of an object yields a two-part code that is as short as the shortest one part code, restricting the complexity of the allowed statistic may yield two-part codes that are considerably longer than the best one-part code (so the statistic is insufficient). This is what happens for the non-stochastic objects. In fact, for every object there is a complexity bound below which this happens—but if that bound is small (logarithmic) we call the object “stochastic” since it has a simple satisfactory explanation (sufficient statistic). Thus, Kolmogorov in [14] (full text given below) makes the important distinction of an object being random in the “negative” sense by having this bound high (they have high complexity and are not typical elements of a low-complexity model), and an object being random in the “positive, probabilistic” sense by both having this bound small and itself having complexity considerably exceeding this bound (like a string  $x$  of length  $n$  with  $K(x) \geq n$ , being typical for the set  $\{0,1\}^n$ , or the uniform probability distribution over that set, while this set or probability distribution has complexity  $K(n) + O(1) = O(\log n)$ ).

Corollary 1 establishes that for every length  $n$  and every complexity  $k \leq n + K(n) + O(1)$  (the maximal complexity of  $x$  of length  $n$ ) and every  $\alpha \in [0, k]$ , there are  $x$ ’s of length  $n$  and complexity  $k$  such that the minimal randomness deficiency  $\beta_x(i) \geq n - k \pm O(\log n)$  for every  $i \leq \alpha \pm O(\log n)$  and  $\beta_x(i) \pm O(\log n)$  for every  $i > \alpha \pm O(\log n)$ . Therefore, the set of  $n$ -length strings of every complexity  $k$  can be partitioned in subsets of strings that have a Kolmogorov minimal sufficient statistic of complexity  $\Theta(i \log n)$  for  $i = 1, \dots, k/\Theta(\log n)$ . For instance, there are  $n$ -length non-stochastic strings of almost maximal complexity  $n - \sqrt{n}$  having significant  $\sqrt{n} \pm O(\log n)$  randomness deficiency with respect to  $\{0,1\}^n$  or, in fact, every other finite set of complexity less than  $n - O(\log n)$ ! Translation by L.A. Levin [11] of Kolmogorov’s abstract [14]:

“To each constructive object corresponds a function  $\Phi_x(k)$  of a natural number  $k$ —the log of minimal cardinality of  $x$ -containing sets that allow definitions of complexity at most  $k$ . If the element  $x$  itself allows a simple definition, then the function  $\Phi$  drops to 1 even for small  $k$ . Lacking such definition, the element is “random” in a negative sense. But it is positively “probabilistically random” only when function  $\Phi$  having taken the value  $\Phi_0$  at a relatively small  $k = k_0$ , then changes approximately as  $\Phi(k) = \Phi_0 - (k - k_0)$ .”

◇

## 5 Computability Questions

How difficult is it to compute the functions  $h_x, \lambda_x, \beta_x$ , and the minimal sufficient statistic? To express the properties appropriately we require the notion of functions that are not computable, but can be approximated monotonically by a computable function.

DEFINITION 7. A function  $f : \mathcal{N} \rightarrow \mathcal{R}$  is *upper semi-computable* if there is a Turing machine  $T$  computing a total function  $\phi$  such that  $\phi(x, t+1) \leq \phi(x, t)$  and  $\lim_{t \rightarrow \infty} \phi(x, t) = f(x)$ . This means that  $f$  can be computably approximated from above. If  $-f$  is upper semi-computable, then  $f$  is lower semi-computable. A function is called *semi-computable* if it is either upper semi-computable or lower semi-computable. If  $f$  is both upper semi-computable and lower semi-computable, then we call  $f$  *computable* (or recursive if the domain is integer or rational).

Semi-computability gives no speed-of-convergence guaranties: even though the limit value is monotonically approximated we know at no stage in the process how close we are to the limit value. The functions  $h_x(\alpha), \lambda_x(\alpha), \beta_x(\alpha)$  have finite domain for given  $x$  and hence can be given as a table—so formally speaking they are computable. But this evades the issue: there is no algorithm that computes these functions for given  $x$  and  $\alpha$ . Considering them as two-argument functions we show the following (we actually quantify these):

- The functions  $h_x(\alpha)$  and  $\lambda_x(\alpha)$  are upper semi-computable but not computable.
- Moreover, there is no algorithm that given  $x^*$  and  $\alpha$  finds  $h_x(\alpha)$  or  $\lambda_x(\alpha)$ .

- The function  $\beta_x(\alpha)$  is not upper- or lower semi-computable, but we can compute it given an oracle for the halting problem.
- There is no algorithm that given  $x$  and  $K(x)$  finds a minimal sufficient statistic for  $x$ .

**Structure Function:** It is easy to see that  $h_x(\alpha)$  or  $\lambda_x(\alpha)$ , and the finite set that witnesses its value, are upper semi-computable: run all programs of length up to  $\alpha$  dovetailed fashion, check whether a halting program produced a finite set containing  $x$ , and replace the previous candidate with the new set if it is smaller.

The next question is: Is the function  $\lambda_x(\alpha)$ , as the function of two arguments, computable? Of course not, because if this were the case, then we could find, given every large  $k$ , a string of complexity at least  $k$ . Indeed, we know that there is a string  $x$  for which  $\lambda_x(k) > k$ . Applying the algorithm to all strings in the lexicographical order find first such  $x$ . Obviously  $K(x) \geq k - O(1)$ . But it is known that we cannot prove that  $K(x) > k$  for sufficiently large  $k$ , [12].

Assume now that we are given also  $K(x)$ . The above argument does not work any more but the statement remains true:  $\lambda_x(\alpha)$  is not computable even if the algorithm is given  $K(x)$ .

Assume first that the algorithm is required to output the correct answer given any approximation to  $K(x)$ . We show that no algorithm can find  $\lambda$  that is close to  $\lambda_x(\alpha)$  for some  $0 \ll \alpha \ll K(x)$ .

**THEOREM 6.** *For every constant  $c$  there is a constant  $d$  such the following holds. There is no algorithm that for infinitely many  $k$ , given  $k$  and  $x$  of length  $k + d \log k$  with  $|K(x) - k| \leq 2 \log k$ , always finds  $\lambda$  such that there is  $2 \log k \leq \alpha \leq k$  with  $|\lambda_x(\alpha) - \lambda| < c \log k$ .*

*Proof.* Fix  $c$ . The value of  $d$  will be chosen later. The proof is by contradiction. Let  $A$  be some algorithm. We want to fool it on some pair  $\langle x, k \rangle$ .

Fix large  $k$ . We will construct a set  $S$  of cardinality  $2^{k-2 \log k}$  such that every string  $x$  in  $S$  has length  $k + d \log k$  and complexity at most  $k + 2 \log k$ , and the algorithm halts on  $\langle x, k \rangle$  and outputs  $\lambda \geq (c+1) \log k$ . This is a contradiction. Indeed, there is  $x \in S$  with  $K(x) \geq k - 2 \log k$ . Hence the output  $\lambda$  of  $A$  on  $\langle x, k \rangle$  is correct, that is, there is  $\alpha$  with  $2 \log k \leq \alpha \leq k$  and  $|\lambda_x(\alpha) - \lambda| < c \log k$ . Then  $\lambda_x(\alpha) > \log k$ . On the other hand,  $\lambda(2 \log k) \leq k$  as witnessed by  $S$ . Thus we obtain

$$k < \lambda_x(\alpha) \leq \lambda_x(2 \log k) \leq k,$$

a contradiction.

Run in a dovetailed fashion all programs of length  $k$  or less. Start with  $x$  equal to first string of length  $k + d \log k$  and with  $S = B = \emptyset$ . Run  $A$  on  $\langle x, k \rangle$  and include in  $B$  all strings  $x'$  such that either a program  $p$  of length at most  $k$  has halted and output a set  $C \ni x'$  with  $|p| + \log |C| \leq k + (2c+1) \log k$ , or we find out that  $K(x') < k - 2 \log k$ . Once  $x$  gets in  $B$  we change  $x$  to the first string of length  $k + d \log k$  outside  $B \cup S$ . (We will show that at every step it holds  $|B \cup S| < 2^{k+d \log k}$ .)

We proceed in this way until  $A(x, k)$  prints a number  $\lambda$  or the number of changes of  $x$  exceed  $2^{k+2}$ . (Actually, below we will prove that the number of changes of  $x$  does not exceed  $2^{k+1} + 2^{k-2 \log k}$ .) Therefore  $K(x) \leq k + 2 \log k$  for all our  $x$ 's so we eventually will find  $x$  such that  $A(x, k)$  outputs a result  $\lambda$ . If  $\lambda \geq k + (c+1) \log k$  then include  $x$  in  $S$  and then change  $x$  to the first string of length  $k + d \log k$  outside (the current version of)  $B \cup S$ . Otherwise, when  $\lambda < k + (c+1) \log k$ , let  $\tilde{\lambda}_x$  be the current approximation of  $\lambda_x$ . We know that  $x$  is outside all known sets  $C$  with  $K(C) \leq k$ ,  $K(C) + \log |C| \leq k + (2c+1) \log k$ . Therefore, for every  $\alpha \leq k$  it holds  $\tilde{\lambda}_x(\alpha) > k + (2c+1) \log k$  and hence  $|\lambda_x(\alpha) - \lambda| > c \log k$ . This implies that either  $K(x) < k - 2 \log k$  or  $\lambda_x$  differs from  $\lambda_x$ . So we are sure that at least one more program of length  $k$  or less still has to halt. We wait until this happens, then include  $x$  in  $B$  and change  $x$  to the first string of length  $k + d \log k$  outside  $B \cup S$ .

Once we get  $2^{k-2 \log k}$  elements in  $S$  we halt. Every change of  $x$  is caused by a halting of a new program of length at most  $k$  or by including  $x$  in  $S$ , thus the total number of changes does not exceed  $2^{k+1} + 2^{k-2 \log k}$ .

Note that at every step we have

$$|B \cup S| \leq 2^{k-2 \log k} + 2^{k+(2c+1) \log k} + 2^{k-2 \log k} < 2^{k+d \log k}$$

provided that  $d > 2c + 1$ . □

What if the algorithm is required to approximate  $\lambda_x$  only if it is given the precise value of  $K(x)$ ? We are able to prove that in this case the algorithm cannot compute  $\lambda_x(\alpha)$  too. It is even impossible to approximate the complexity of minimal sufficient statistic. To formulate this result precisely consider the following promise problem:

**Input:**  $x, k = K(x), \alpha \in [\varepsilon, k - \varepsilon]$ .

**Output:**

1, if  $\lambda_x(\alpha - \varepsilon) < k + 6 \log k$ ,

0, if  $\lambda_x(\alpha + \varepsilon) > k + 3\varepsilon$ .

If neither of two above cases occurs the algorithm may output any value or no value at all.

**THEOREM 7.** *There is no algorithm  $A$  solving this promise problem for all  $x$  and  $\varepsilon = |x|/10 \log |x|$ .*

**COROLLARY 3.** *There is no algorithm that given  $x, k = K(x)$  finds an integer valued function  $\lambda$  on  $[0, k]$  such that  $\lambda_x = \mathcal{E}(\lambda)$  for  $\varepsilon = \delta = |x|/10 \log |x|$ .*

Indeed, if there were such algorithm we could solve the above promise problem by answering 1 when  $\lambda(\alpha) \leq k + 2\varepsilon$  and 0 otherwise.

*Proof.* The proof is by contradiction. The idea is as follows. Fix large  $k$ . We consider  $N = O(\log k)$  points  $\alpha_1, \dots, \alpha_N$  that divide the segment  $[0, k]$  into equal parts. We lower semicompute  $\lambda_x$  and  $K(x)$  for different  $x$ 's of length about  $k + 4\varepsilon$ . We are interested in strings  $x$  with  $\tilde{\lambda}_x(\alpha_1 + \varepsilon) > k + 3\varepsilon$  where  $\tilde{\lambda}_x$  is the current upper approximation to  $\lambda_x$ . By counting arguments there are many such strings. We apply the algorithm to  $\langle x, \tilde{K}(x), \alpha_1 \rangle$  for those  $x$ 's, where  $\tilde{K}(x)$  stands for the currently known upper bound for  $K(x)$ . Assume that  $A(x, \tilde{K}(x), \alpha_1)$  halts. If the answer is 1 then we know that  $K(x) < \tilde{K}(x)$  or  $\lambda_x(\alpha_1 + \varepsilon) < \tilde{\lambda}_x(\alpha_1 + \varepsilon)$  and we continue lower semicomputation until we get know which of two values  $\tilde{K}(x)$  or  $\tilde{\lambda}_x(\alpha_1 + \varepsilon)$  gets smaller. If the latter is decreased we just remove  $x$  (the total number of removed  $x$  will not increase  $2^{k+3\varepsilon}$  and thus they form a small fraction of strings of length  $k + 4\varepsilon$ ). If for many  $x$ 's the answer is 0 we make those answers incorrect by including those  $x$ 's in a set of cardinality  $2^{k-\alpha_1+2\varepsilon}$  and complexity  $\alpha_1 - \varepsilon$ . Then for all such  $x$ 's  $\lambda_x(\alpha_1 - \varepsilon) < k + \varepsilon$  and thus algorithm's answer is incorrect. Hence  $K(x) < \tilde{K}(x)$  and we continue lower semicomputation. For all those  $x$ 's for which  $\tilde{K}(x)$  is decreased we repeat the trick with  $\alpha_2$  in place of  $\alpha_1$ . In this way we will force  $\tilde{K}(x)$  to decrease very fast for many  $x$ 's. For most of  $x$ 's  $\tilde{K}(x)$  will become much less than  $k$ , which is impossible.

Here is the detailed construction. Fix large  $k$ . Let  $N = 3 \log k$ ,  $\delta = k/9 \log k$  (one third of the distance between consecutive  $\alpha_i$ ),  $\alpha_i = k - 3\delta i + \delta$ ,  $n = k + 4\delta$  (the length of  $x$ ). The value of parameter  $\varepsilon$  is chosen to be slightly less than  $\delta$  (we will need that  $\delta > \varepsilon + 4 \log k$  for large enough  $k$ ).

We will run all the programs of length at most  $k' = k + 2 \log k$  and the algorithm  $A$  on all possible inputs in a dovetailed fashion.

We will define a set  $X$  of  $2^k$  strings of length  $n$ . Our action will be determined by  $k$  only, hence  $K(x) \leq k + 2 \log k = k'$  for every  $x \in X$  provided  $k$  is large enough. We will also define some small sets  $B_l$  for  $l = 1, \dots, N$ , the sets of "bad" strings and  $B$  will denote their union. Every  $B_l$  will have at most  $2^{k-\delta}$  elements. We start with  $B_l = \emptyset$  for  $l = 1, \dots, N$ .

We make  $2^k$  stages. At every stage consider the sets

$$\begin{aligned} X_l &= \{x \in X \setminus B : \tilde{K}(x) = k' + 1 - l\} \quad \text{for } l = 1, \dots, N, \\ X_0 &= \{x \in X \setminus B : \tilde{K}(x) > k'\}. \end{aligned}$$

Before and after every stage the following invariant will be true.

- (1)  $|X_l| < 2^{3\delta l}$  for every  $0 \leq l \leq N$ ; in particular  $X_0 = \emptyset$ .
- (2) For all  $1 \leq l \leq N$  for all  $x \in X_l$  it holds  $A(x, \tilde{K}(x), \alpha_l) = 0$ .
- (3) For all  $0 \leq l < i \leq N$  and all  $x \in X_l$  it holds  $\tilde{\lambda}_x(\alpha_i + \delta) > k + 3\delta$ .
- (4)  $|B_i| \leq 2^{3i\delta - 3\delta + 1} \times (\text{the number of programs of length at most } k - 3i\delta + 2\delta \text{ that have halted so far})$ .

At the start all  $X_l$ 's and  $B_i$ 's are empty so the invariant is true. Each stage starts by including a new element in  $X$ . This element is the first string  $x_0$  of length  $n$  outside  $X$  such that  $\tilde{\lambda}_x(\alpha) > k + 3\delta$  for all  $\alpha \leq k$ . Thus by the choice of  $x_0$  the assertions (2), (3) and (4) remain true but (1) may not.

We claim that continuing the dovetailing and updating properly  $B_i$ 's we eventually make every one of (1), (2), (3) and (4) true. During the dovetailing the sets  $X_l$  change (an element can move from  $X_l$  to  $X_i$  for  $i > l$  and even to  $X \setminus (X_0 \cup \dots \cup X_N)$ ). We will denote by  $\tilde{X}_l$  the version of  $X_l$  at the beginning of the stage (and  $\tilde{X}_0 = \{x_0\}$ ) and keep the notations  $X_l, B_i$  for current versions of  $X_l, B_i$ , respectively. The rule to update  $B_i$ 's is very simple: once at some step of the dovetailing a new set  $C$  of complexity at most  $k - 3i\delta + 2\delta = \alpha_i + \delta$  appears, we include in  $B_i$  the set  $\bigcup_{j=0}^{i-1} \tilde{X}_j$ . As  $X_l \subset \bigcup_{j=0}^l \tilde{X}_j$  this keeps (3) true. Moreover, this keeps true also the following assertion:

(5) For all  $1 \leq l \leq N$  for all  $x \in X_l \setminus \tilde{X}_l$  it holds  $\tilde{\lambda}_x(\alpha_l + \delta) > k + 3\delta$ .

And this also keeps (4) true since  $|\bigcup_{j=0}^{i-1} \tilde{X}_j| < 1 + \sum_{j=1}^{i-1} 2^{3\delta j} < 2^{3\delta(i-1)+1}$ .

We continue the dovetailing and update  $B_i$ 's as discribed until both (1) and (2) are true. Let us prove that this happens eventually. It suffices to show that if (3), (4) and (5) are true but (2) is not, or (2), (3), (4) and (5) are true but (1) is not then at least one program of length  $\leq k'$  will halt or  $A(x, \tilde{K}(x), \alpha_l)$  is undefined for some  $l$  and some  $x \in X_l$ .

Consider the second case: (2), (3), (4) and (5) are true but (1) is not. Pick  $l$  such that  $|X_l| \geq 2^{3\delta l}$ . If  $l = 0$ , that is,  $\tilde{K}(x_0) > k'$ , we are done, as  $K(x_0) \leq k'$ . Otherwise, let  $S$  consist of the first  $2^{3\delta l}$  elements in  $X_l$ . We claim that  $K(S) \leq k - 3l\delta + 4\log k \leq \alpha_l - \varepsilon$ . To prove the claim we will show that all  $S \subset X_l$  obtained in this way are pairwise disjoint, therefore their number is at most  $2^k / 2^{3l\delta}$ . Thus  $S$  may be identified by  $k, l$  and its index among all such  $S \subset X_l$ .

Therefore for all  $x \in S$  we have  $\lambda_x(\alpha_l - \varepsilon) < k + 4\log k < \tilde{K}(x) + 6\log \tilde{K}(x)$  and the value  $A(x, \tilde{K}(x), \alpha_l) = 0$  is not correct. This implies that  $\tilde{K}(x)$  is not correct for all  $x \in S$ . We continue the dovetailing until all elements of  $S$  move outside  $X_l$ . Then  $S$  becomes disjoint with  $X_0 \cup \dots \cup X_l$  and therefore it will be disjoint with all future versions of  $X_l$ .

Consider the first case: (3), (4) and (5) are true but (2) is not. Pick  $l$  and  $x \in X_l$  such that  $A(x, \tilde{K}(x), \alpha_l)$  is undefined or  $A(x, \tilde{K}(x), \alpha_l) = 1$ . If  $A(x, \tilde{K}(x), \alpha_l)$  is undefined then we are done: since  $\tilde{\lambda}_x(\alpha_l + \varepsilon) \geq \tilde{\lambda}_x(\alpha_l + \delta) > k + 3\delta > \tilde{K}(x) + 3\varepsilon$ , either  $\tilde{\lambda}_x$  or  $\tilde{K}$  will decrease, or  $A(x, \tilde{K}(x), \alpha_l)$  will get defined. Consider the other case. Obviously  $x \notin X_l \setminus \tilde{X}_l$ . By (5) we have  $\tilde{\lambda}_x(\alpha_l + \varepsilon) \geq \tilde{\lambda}_x(\alpha_l + \delta) > k + 3\delta \geq \tilde{K}(x) + 3\varepsilon$ . Therefore  $\lambda_x(\alpha_l + \delta) < \tilde{\lambda}_x(\alpha_l + \delta)$  or  $\tilde{K}(x) < K(x)$  and we are done.

After  $2^k$  stages the set  $|X|$  has  $2^k$  elements and we have a contradiction. Indeed, all  $X_1, \dots, X_N$  form a very small part of  $X$  because the invariant is true. The sets  $B_1, \dots, B_N$  together form also a very small part of  $X$ . Thus for most strings  $x \in X$  it holds  $\tilde{K}(x) < k' - N + 1 \ll k$  which is a contradiction.  $\square$

REMARK 6. Let us replace in the above promise problem  $K(x)$ , the prefix complexity of  $x$ , by  $C(x)$ , the plain complexity of  $x$ . For the modified problem we can strengthen the above theorem by allowing  $\varepsilon = |x|/c$  where the constant  $c$  depends on the reference computer. Indeed for every  $x \in X$  we have  $C(x) \leq k + O(1)$ : every  $x \in X$  can be described by its index in  $X$  in exactly  $k$  bits and the value of  $k$  may be retrieved from the length of the description of  $x$ . Therefore we will need  $N = O(1)$  to obtain a contradiction.

After a discussion of these results, Andrei A. Muchnik suggested, and proved, that if we are also given an  $\alpha_0$  such that  $\lambda_x(\alpha_0) \approx K(x)$  but  $\lambda_x(\alpha)$  is much bigger than  $K(x)$  for  $\alpha$  much less than  $\alpha_0$  (which is therefore the complexity of the minimal sufficient statistic), then we can compute  $\lambda_x$  over all of its domain. This result underlines the significance of the information contained in the *minimal* sufficient statistic:

THEOREM 8. *There are a constant  $c \geq 0$  and an algorithm that given any  $x, k, \alpha_0$  with  $K(x) \leq k \leq \lambda_x(\alpha_0)$  finds a function  $\lambda$  defined on  $[0, k]$  such that  $\lambda_x = \mathcal{E}(\lambda)$  with  $\delta = \lambda_x(\alpha_0) - K(x) + O(1)$  and  $\varepsilon = \alpha_0 - \alpha_1 + c \log k$  where  $\alpha_1 = \min\{\alpha : \lambda_x(\alpha) \leq k + c \log k\}$ .*

*Proof.* The algorithm is as follows. Let  $D_k = \{\langle y, i \rangle \mid K(y) \leq i \leq k\} \subset D$ . Enumerate pairs  $\langle y, i \rangle \in D_k$  until a pair  $\langle x, i_0 \rangle$  appears and form a list of all enumerated pairs. For  $\alpha \leq \alpha_0$  define  $\lambda(\alpha)$  to be the

minimum  $i + \log |S|$  over all  $S \ni x$  such that a pair  $\langle x, i \rangle$  with  $i \leq \alpha$  is in the list. For  $\alpha_0 < \alpha \leq k$  let  $\lambda(\alpha) = k$ .

For every  $\alpha > \alpha_0$  we have  $\lambda_x(\alpha) \geq K(x) - O(1) \geq k - \lambda_x(\alpha_0) + K(x) - O(1) = \lambda(\alpha) - \delta$  and  $\lambda_x(\alpha) \leq \lambda_x(\alpha_0) \leq k + (\lambda_x(\alpha_0) - K(x)) \leq \lambda(\alpha) + \delta$ .

For every  $\alpha \leq \alpha_0$  we have  $\lambda_x(\alpha) \leq \lambda(\alpha)$ . So it remains to show that for every  $\varepsilon \leq \alpha \leq \alpha_0$  we have  $\lambda(\alpha) \leq \lambda_x(\alpha - \varepsilon) + \delta$ . We will prove a stronger statement:  $\lambda(\alpha) = \lambda_x(\alpha)$  for every  $\alpha \leq \alpha_0 - \varepsilon$  provided  $c$  is chosen appropriately. To prove this it suffices to show that all for all  $S$  with  $K(S) \leq \alpha_0 - \varepsilon$  the pair  $\langle S, K(S) \rangle$  belongs to the list.

By Theorem 5 Item (i) we have  $\lambda_x(|m_x^k| + c_1 \log k) \leq k + c_2 \log k$ . That is,  $\alpha_1 \leq |m_x^k| + c_1 \log k$  if  $c \geq c_2$  and  $\alpha_0 - \varepsilon = \alpha_0 - \alpha_0 + \alpha_1 - c \log k \leq |m_x^k| + (c_1 - c) \log k$ .

From the proof of Theorem 4 we see that there is a constant  $c_3$  such that for every  $y$  with  $K(y) \leq |m_x^k| - c_3 \log k$  the index of  $\langle y, K(y) \rangle$  in the enumeration of  $D_k$  has less than  $|m_x^k|$  common bits with  $N^k$ . Assuming that  $c \geq c_1 + c_3$  we obtain that the indexes of all pairs  $\langle y, K(y) \rangle$  with  $K(y) \leq \alpha_0 - \varepsilon$  in the enumeration of  $D_k$  are less than  $I_x^k$ .  $\square$

**Randomness Deficiency Function:** The function  $\beta_x(\alpha)$  is computable from  $x, \alpha$  given an oracle for the halting problem: run all programs of length  $\leq \alpha$  dovetailed fashion and find all finite sets  $S$  containing  $x$  that are produced. With respect to all these sets determine the conditional complexity  $K(x | S^*)$  and hence the randomness deficiency  $\delta(x | S)$ . Taking the minimum we find  $\beta_x(\alpha)$ . All these things are possible using information from the halting problem to determine whether a given program will terminate or not. It is also the case that the function  $\beta_x(\alpha)$  is upper semi-computable from  $x, \alpha, K(x)$  up to a logarithmic error: this follows from the semi-computability of  $\lambda_x(\alpha)$  and Theorem 2. More subtle is that  $\beta_x$  is not semi-computable, not even within a large margin of error:

**THEOREM 9.** *The function  $\beta_x(\alpha)$  is*

- (i) *not lower semi-computable to within precision  $|x|/3$ ; and*
- (ii) *not upper semi-computable to within precision  $|x|/\log^4 |x|$ .*

*Proof.* (i) The proof is by contradiction. Assume Item (i) is false. Choose an arbitrary length  $n$ . Let  $\beta$  be a function defined by  $\beta(i) = \frac{n}{2}$  for  $0 \leq i \leq \frac{n}{3}$ , and equal 0 otherwise. Then the function  $\beta_x$  with  $x$  of length  $n$ , corresponding to  $\beta$ , by Corollary 1, has  $x$  with  $k = K(x)$  satisfying  $\beta(0) = n - k \pm O(\log n)$  so that  $k = \frac{n}{2} \pm O(\log n)$ . Moreover,  $\beta_x(i) = \frac{n}{2} \pm O(\log n)$  for  $O(\log n) < i \leq \frac{n}{3} - O(\log n)$ , and  $\beta_x(i) = O(\log n)$  for  $i > \frac{n}{3} + O(\log n)$ . Write the set of such  $x$ 's as  $X$ . By dovetailing the lower approximation of  $\beta_x(i)$  for all  $x$  of length  $n$  and some  $i$  with  $\frac{n}{8} \leq i \leq \frac{n}{4}$ , by assumption on lower semi-computability of  $\beta_x$ , we must eventually find an  $x$ , if not  $x \notin X$  then  $x \in X$ , for which the lower semi-computation of  $\beta_x(i)$  exceeds  $\frac{n}{2} - \frac{n}{3} - O(\log n)$ . But we know from Corollary 1 that  $\beta_x(i) = O(\log n)$  for  $i > K(x) + O(\log n)$ , and hence we have determined that  $i - O(\log n) < K(x)$ . Therefore,  $K(x) > \frac{n}{8} - O(\log n)$ . But this contradicts the well-known fact [12] that in a fixed formal system (like arithmetic) we cannot prove for particular strings that they have complexity exceeding a fixed constant associated with that system.

(ii) The proof is by contradiction. Assume Item (ii) is false. Fix a large length  $n = 2^k$  and let  $A_1 = \{0, 1\}^n$ , so that  $\alpha = 2 \log k \geq K(A_1)$ . Let  $x$  be a string of length  $n$ , let  $N^\alpha < 2^{\alpha+1}$  be the number of halting programs of length at most  $\alpha$ , and let  $\mathcal{A} = \{A_1, \dots, A_m\}$  be the set of finite sets of complexity at most  $\alpha$ . Since  $x \in A_1$ , the value  $\beta_x(\alpha)$  is finite and  $\beta_x(\alpha) = \min_{A \in \mathcal{A}} \{\delta(x | A)\}$ . Assuming  $\beta_x$  is upper semi-computable, we can run the following algorithm:

**Algorithm:** Given  $N^\alpha$ ,  $\alpha$ , and  $x$ ,

**Step 1:** Enumerate all finite sets  $\mathcal{A} = \{A_1, \dots, A_m\}$  of complexity  $K(A_i) \leq \alpha$ . Since we are given  $N^\alpha, \alpha$  we can list them exhaustively.

**Step 2:** Dovetail the following computations simultaneously:

**Step 2.1:** Upper semi-compute  $\beta_x(\alpha)$ , for all  $x$  of length  $n$ .

**Step 2.2:** For all  $i = 1, \dots, m$ , lower semi-compute  $\delta(x | p_i) = \log |A_i| - K(x | p_i)$ , where  $p_i$  is the minimal length program computing  $A_i$ .

We write the approximations at the  $t$ th step as  $\beta_x^t(\alpha)$ ,  $\delta^t(x | A_i)$ , and  $K^t(x | A_i)$ , respectively. We continue the computation until step  $t$  such that

$$\beta_x^t(\alpha) < \min_{A \in \mathcal{A}} \{\delta^t(x | A)\} + n / \log^4 n.$$

This  $t$  exists by the assumption above. By definition,  $\min_{A \in \mathcal{A}} \{\delta(x | A)\} = \beta_x(\alpha) \leq \beta_x^t(\alpha)$ . Let  $p^x$  denote the minimal program for the set  $A^x$ , minimizing the right-hand side. (Here we use that  $x$  belongs to a set in  $\mathcal{A}$ .) Together, this shows that  $\log |A^x| - \beta_x^t(\alpha) \leq K(x | p^x)$  and  $\log |A^x| - \beta_x^t(\alpha) \geq K^t(x | p^x) - n/\log^4 n \geq K(x | p^x) - n/\log^4 n$ . Thus we obtained an estimation  $\log |A^x| - \beta_x^t(\alpha)$  of  $K(x | p^x)$  with precision  $n/\log^4 n$ . We use that  $K(x | p^x)$  is a good approximation to  $K(x)$ :

$$K(x | p^x) - c_1 \leq K(x) \leq K(x | p^x) + |p^x| + c_1 \leq K(x | p^x) + \alpha + c_1,$$

where  $c_1$  is a constant. Consequently,

$$K(K(x) | x) \leq K(N^\alpha, \alpha, K(x) - \log |A^x| + \beta_x^t(\alpha)) + c_2.$$

where the constant  $c_2$  is the length of a program to reconstruct  $\alpha, N^\alpha$  and  $K(x) - \log |A^x| + \beta_x^t(\alpha) \leq \alpha + c_1 + n/\log^4 n$ , and combining this information with the conditional information  $x$ , to compute  $K(x)$ . Observing  $K(N^\alpha) = \alpha - K(\alpha) + O(1)$  by [9], and substituting  $\alpha = 2 \log \log n$ , there is a constant  $c_3$  such that

$$K(K(x) | x) \leq 2 \log \log n + \log n - 4 \log \log n + c_3.$$

However, for every  $n$ , we can choose an  $x$  of length  $n$  such that  $K(K(x) | x) \geq \log n - \log \log n$  by [7], which gives the required contradiction.  $\square$

Here we have used a particular small  $\alpha$ . Exactly the same argument shows that the precision achievable in upper semi-computing  $\beta_x(\alpha)$  cannot be larger than  $2^{\log n - \alpha} / \log^2 n$  which is  $\sqrt{n} / \log^2 n$  for  $\alpha = \frac{1}{2} \log n$ .

## 6 Conclusion

The algorithmic statistical properties of a data string  $x$  are fully represented by the set of triples  $\langle \alpha, \beta, h \rangle$  such that there is a set  $S \ni x$  with  $K(S) = \alpha$ ,  $\delta(x | S) = \log |S| - K(x | S^*) = \beta$ ,  $\log |S| = h$ . The first component is the simplicity of the theory  $S$  explaining the data. The second component (the randomness deficiency) shows how typical is the data with respect to  $S$ . The last component reflects how short the total two part code of the data using theory  $S$  is, when we simply use a full-length index in the enumeration of  $S$  (and we thus ignore typicality of  $x$ ). As far as we know no complete characterization is known how this set may look like. A characterization was obtained by V'yugin [22, 23] for possible shapes of projection of this set on  $\alpha, \beta$ -coordinates but only for case when  $\alpha = o(K(x))$ . Our results describe possible shapes of the projection of this set on  $\alpha, \beta$ -coordinates for the full domain of  $\alpha$ , and similarly possible shapes of the projection on  $\alpha, h$ -coordinates. The major result of this work is that a finite set that witnesses  $h_x(\alpha)$  (minimizes the log-cardinality of a set containing  $x$  of complexity at most  $\alpha$ ) simultaneously witnesses  $\beta_x(\alpha)$  (minimizes the randomness deficiency of  $x$  with respect to a set containing it of complexity at most  $\alpha$ ). We have also addressed the non-computability of  $h_x$  (but it is upper semi-computable), and the fine structure of its shape (especially for  $\alpha$  below the minimal sufficient statistic complexity).

**Minimal model determination deficiency:** There is also the fourth important parameter,  $K(S | x^*)$  reflecting the determinacy of hypothesis  $S$  by the data  $x$ . However, the equality  $\log |S| + K(S) - K(x) = K(S | x^*) + \delta(x | S) + O(1)$  shows that this parameter can be expressed in  $\alpha, \beta, h$ . Expressing its minimum as a function of a complexity bound  $\alpha$ , in analogy with  $\beta_x(\alpha)$  and  $h_x(\alpha)$ , we define the *minimal model determination deficiency* of  $x$  with respect to finite sets of complexity at most  $\alpha$  by

$$\iota_x(\alpha) = \min_S \{K(S | x^*) : S \ni x, K(S) \leq \alpha\}.$$

Given  $x, h_x(\alpha), \alpha$  we can find the first enumerated set, containing  $x$ , of complexity  $\leq \alpha$  and  $\log |S| = h_x(\alpha)$ . Therefore,  $\iota_x(\alpha) = O(\log h_x(\alpha))$ , that is, logarithmic. What about the other sets witnessing  $h_x(\alpha)$ ? There are a priori at most  $2^\alpha$  of them, and hence  $K(S | x^*)$  can rise to  $\alpha$ . Then, the value  $h_x(\alpha) + \alpha - K(x) = K(S | x^*) + \delta(x | S) + O(1)$  could be split in a non-logarithmic constituent  $K(S | x^*)$  part in the right-hand side of the equation for different sets  $S \ni x$ , of log-cardinality  $h_x(\alpha)$  and at most complexity  $\alpha$ . However, the main result (7) establishes that this is not the case, and  $K(S | x^*)$  is logarithmic for *every* set  $S$  witnessing  $h_x(\alpha)$ . This also shows that there are at most polynomially many such sets.

## Acknowledgement

We thank Harry Buhrman, Andrei A. Muchnik, Marcus Hutter, for helpful discussions, and Tom Cover, Péter Gács, and Leonid A. Levin for historical details about Kolmogorov’s original proposal of the structure function in the early seventies and about their own unpublished work on the subject. After the first author questioned him whether the result in Theorem 2 was perhaps known before, Muchnik answered negatively and supplied an independent proof of it. He also suggested and proved Theorem 8.

## References

- [1] A.R. Barron, J. Rissanen, and B. Yu, The minimum description length principle in coding and modeling, *IEEE Trans. Inform. Theory*, IT-44:6(1998), 2743–2760.
- [2] T.M. Cover, Kolmogorov complexity, data compression, and inference, pp. 23–33 in: *The Impact of Processing Techniques on Communications*, J.K. Skwirzynski, Ed., Martinus Nijhoff Publishers, 1985.
- [3] T.M. Cover, Attending [15], Email to PV, January 24, 2002.
- [4] T.M. Cover, P. Gács and R.M. Gray, Kolmogorov’s contributions to Information Theory and Algorithmic Complexity, *Ann. Probab.*, 17(1989), 840–865.
- [5] T.M. Cover and J.A. Thomas, *Elements of Information Theory*, Wiley, New York, 1991.
- [6] R. A. Fisher, On the mathematical foundations of theoretical statistics, *Philosophical Transactions of the Royal Society of London, Ser. A*, 222(1922), 309–368.
- [7] P. Gács, On the symmetry of algorithmic information, *Soviet Math. Dokl.*, 15 (1974) 1477–1480. Correction: *ibid.*, 15 (1974) 1480.
- [8] P. Gács, Attending [15], Email to PV, January 24, 2002.
- [9] P. Gács, J. Tromp, P.M.B. Vitányi. Algorithmic statistics, *IEEE Trans. Inform. Th.*, 47:6(2001), 2443–2463.
- [10] Q. Gao, M. Li and P.M.B. Vitányi, Applying MDL to learn best model granularity, *Artificial Intelligence*, 121(2000), 1–29.
- [11] L.A. Levin. Emails to PV on February 7,11,20, 2002.
- [12] M. Li and P.M.B. Vitányi, *An Introduction to Kolmogorov Complexity and its Applications*, Springer-Verlag, New York, 2nd Edition, 1997.
- [13] A.N. Kolmogorov, Three approaches to the quantitative definition of information, *Problems Inform. Transmission* 1:1 (1965) 1–7.
- [14] A.N. Kolmogorov, Complexity of algorithms and objective definition of randomness, *Uspekhi Mat. Nauk*, 29:4(1974), 155 (Abstract of a talk for the Moscow Mathematical Society, April 16, 1974, in Russian. Translation in Section 8.)
- [15] A.N. Kolmogorov, Talk at the Information Theory Symposium in Tallinn, Estonia, 1974, according to [8, 3].
- [16] J.J. Rissanen, Stochastic complexity, *J. Royal Stat. Soc., Ser. B*, 49(1987), 223–239; Discussion: *ibid*, 252–265.
- [17] A.Kh. Shen, The concept of  $(\alpha, \beta)$ -stochasticity in the Kolmogorov sense, and its properties, *Soviet Math. Dokl.*, 28:1(1983), 295–299.
- [18] A.Kh. Shen, Discussion on Kolmogorov complexity and statistical analysis, *The Computer Journal*, 42:4(1999), 340–342.
- [19] P.M.B. Vitányi and M. Li, Minimum Description Length Induction, Bayesianism, and Kolmogorov Complexity, *IEEE Trans. Inform. Theory*, IT-46:2(2000), 446–464.
- [20] P.M.B. Vitányi, Meaningful information, Los Alamos National Laboratories Archives, <http://xxx.lanl.gov/abs/cs.CC/0111053>
- [21] V.G. Vovk, Learning about the parameter of the Bernoulli Model, *J. Comput. System Sci.*, 55(1997), 96–104.
- [22] V.V. V’yugin, On the defect of randomness of a finite object with respect to measures with given complexity bounds, *SIAM Theory Probab. Appl.*, 32:3(1987), 508–512.
- [23] V.V. V’yugin, Algorithmic complexity and stochastic properties of finite binary sequences, *The Computer Journal*, 42:4(1999), 294–317.



- [24] V.V. V'yugin. Does snooping help? *The Computer Journal*, 2002, To appear.
- [25] C.S. Wallace and P.R. Freeman, Estimation and inference by compact coding, *J. Royal Stat. Soc., Series B*, 49 (1987) 240-251; Discussion: *ibid.*, 252-265.