

N-particle N-level Singlet States: Properties and Applications

Adan Cabello

Departamento de Física Aplicada II, Universidad de Sevilla, 41012 Sevilla, Spain
(dated: December 17, 2019)

Three apparently unrelated problems which have no solution using classical tools are described: the "N-strangers", "secret sharing", and "liar detection" problems. A solution for each of them is proposed. Common to all three solutions is the use of quantum states of total spin zero of N spin- $(N-1)/2$ particles.

PACS numbers: 03.65.Ud, 03.67.Hk, 03.67.Dd

Not long ago, during a meeting on quantum information, a speaker asked the participants to make a list of "interesting" quantum states, namely those which have potential applications (particularly tasks which were impossible using classical physics) or illustrate fundamental issues of quantum mechanics [1]. The list was rather short: Einstein-Podolsky-Rosen-Bohm-Bell states of two particles [2, 3, 4], Greenberger-Horne-Zeilinger (GHZ) states of three or more qubits [5], Werner (mixed) states [6], Hardy states (pure non-maximally entangled states of two particles) [7], Horodecki "bound" states (entangled mixed states from which no pure entanglement can be distilled) [8], and W states of three qubits [9]. Curiously, most of them were first introduced in connection with Bell's theorem, and some appeared in the course of the classification of entanglement. Surprisingly, none of them was originally introduced as the answer to a practical problem without classical solution (although most of them have later found numerous applications of this kind [10, 11, 12, 13, 14, 15, 16, 17, 18, 19]).

Here we shall introduce three apparently unrelated problems without classical solution and then propose a solution for all of them, using quantum mechanics. Common to all these solutions is the use of a family of quantum states.

(1) The N-strangers problem. The scenario for this problem is an extension to a high number N of players of the situation described in Patricia Highsmith's novel and Alfred Hitchcock's movie *Strangers on a Train* [20]: N complete strangers A_i ($i = 1; \dots; N$), meet on a train. A_i wants B_i dead. During small talk, one suggests that an "exchange" murder between N complete strangers would be unsolvable. After all, how could the police find the murderer when he/she is a total and complete stranger with absolutely no connection whatsoever to the murdered victim? A_i could kill B_k , etc. [21]. However, such a plan suffers from an important problem: if all the players know who the murderer of each victim is, then the whole plan is vulnerable to individual denunciations. Alternatively, if the distribution of victims is the result of a secret lottery, how could the murderers be assured that the lottery was not rigged and that nobody had contrived the result or could ascertain it?

The problem is then how to distribute the victims

$fB_i g_1^N$ among the murderers $fA_i g_1^N$ in a way that guarantees that each murderer A_i knows only the identity of his/her victim and that nobody else (beside the murderers) knows anything about the assignment of the victims.

(2) The secret sharing problem. This problem was already described, for $N = 3$, in [15]. It could arise in the following context: A_1 wants to have a secret action taken on her behalf in a distant location. There she has $N-1$ agents, A_2, A_3, \dots, A_N who carry it out for her. A_1 knows that some of them are dishonest, but she does not know which one it is. She cannot simply send a secure message to all of them, because the dishonest ones will try to sabotage the action, but she knows that if all of them carry it out together, the honest ones will keep the dishonest ones from doing any damage.

The problem is then that A_1 wishes to convey a cryptographic key to A_2, A_3, \dots, A_N in such a way that none of them can read it on their own, only if all the A_i ($i = 2; 3; \dots; N$) collaborate. In addition, they wish to prevent any eavesdropper from acquiring information without being detected.

Different quantum solutions to this problem for $N = 3$ has been proposed using either GHZ [14, 15] or Bell states [16]. Below we shall propose a different solution for any N which exhibits some additional advantages.

(3) The liar detection problem. Let us consider the following scenario: three parties A, B , and C are connected by pairwise classical channels. Let us suppose that A sends a message m to B and C , and B sends the same message to C . If both A and B are honest, then C should receive the same m from A and B . However, A could be dishonest and send different messages to B and C , $m_{AB} \neq m_{AC}$ (Fig. 1 left), or, alternatively, B could be dishonest and send a message which is different to the one he receives, $m_{BC} \neq m_{AB}$ (Fig. 1 right). For C the problem is to ascertain without any doubt who is being dishonest. This problem is interesting for classical information distribution in pairwise connected networks. The message could be a database and the dishonest behavior a consequence of an error during the copying or distribution process. This problem apparently has no solution by classical means. It is at the heart of a slightly more complicated problem in distributed computing called the Byzantine agreement problem [23], a version of which

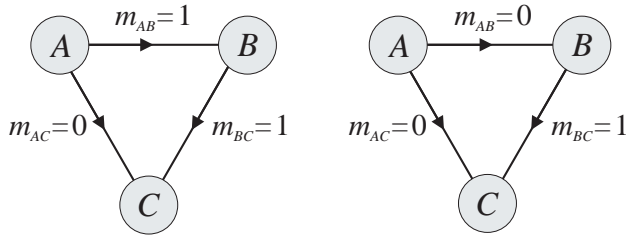


FIG. 1: The liar detection problem. Left: A is a liar because she sends different messages to B and C. Right: B is a liar because he sends C a message different from the one he received from A. The task is for C to identify who is being dishonest, A or B.

has been recently solved using quantum means by Fitz, Gisin, and Maurer [24]. Indeed, the solution for our liar detection problem is based on theirs.

The next step is to show that all of these problems can be solved if each of the N participants are in possession of a sequence of numbers with the following properties: (i) It is random. (ii) The possible numbers are integers from 0 to $N-1$. (iii) If a number i is at position j of the sequence of party k , i is not at position j in any other sequence. (iv) Each party knows only his/her own sequence. (v) Nobody else (beside the parties) knows the sequences. Properties (iv) and (v) are difficult to accomplish using classical tools due to the fact that information transmitted in classical form can be examined and copied without altering it in any detectable way. However, as quantum key distribution protocols show [10, 25], quantum information does not suffer from such a drawback.

Assuming we have a reliable method to generate sequences of numbers with properties (i) to (v) among N distant parties, a method that will be presented below, then the solutions to the above problems are as follows.

Solution to the N strangers problem. Each victim B_i is assigned a label, taken from 0 to $N-1$. If murderer A_i 's sequence starts with j , then A_i must kill B_j , etc. The remaining entries of the sequence can be used for subsequent rounds. The result tells every murderer who his/her victim is in such a way that prevents any murderer (or even a small group of them) from denouncing or blackmailing another. The only way to ascertain with certainty who murdered B_j is that all the other murderers confess [22].

Solution to the secret sharing problem. The key is defined as A_1 's sequence. The only way to reveal it is to make the remaining $N-1$ parties share their respective sequences; the key is then composed by the missing results. If one of the parties tries to be dishonest and gives a number which is different to his/her actual number at a given position j , then there is a probability $1/(r-1)$ of being detected, where r is the number of parties which have not yet revealed their numbers at position j .

Solution to the liar detection problem. Let us sup-

pose that the message m is a trit value 0, 1, or 2. The three parties agree to use the following protocol: (I) If the transmitted message is m_{ij} , then the sender i must also send j the list $l_{ij}^{(m_{ij})}$ of positions in his/her sequence in which the number m_{ij} appears. Note that if the sequences are random and long enough then any $l_{ij}^{(m_{ij})}$ must contain about one third of the total length L of the sequences. (II) The receiver j would not accept any message if the intersection between the received list $l_{ij}^{(m_{ij})}$ and his/her list $l_j^{(m_{ij})}$ is not null nor if $l_{ij}^{(m_{ij})} \cap l_j^{(m_{ij})} = L/3$ elements. We will assume that requirements (I) and (II) force the dishonest one to send correct but perhaps incomplete lists. Otherwise, if i sends a list containing erroneous data, then the probability that j does not accept the message m_{ij} would be $(2^n - 1)/2^n$. In addition, (III) B must send C the list $l_{BC}^{(m_{AB})}$ containing the sequence he has (supposedly) received from A . Therefore, when C finds that $m_{AC} \neq m_{BC}$, she has received three lists to help her to find out whether it is A or B who is being dishonest.

According to rules (I) to (III), if B wants to be dishonest $l_{BC}^{(m_{AB})} \cap l_{BC}^{(m_{AB})}$ must necessarily be a subset of $l_{BC}^{(m_{BC})}$, because B does not know $l_A^{(m_{AB})}$. However, the length of $l_{BC}^{(m_{BC})}$ is about $L/3$, while C is expecting to receive from B two lists with a total length of $2L/3$; then C would conclude that B was being dishonest. Alternatively, if it is A who is being dishonest, the lengths of the two lists that C received from B would total about $2L/3$; then C would conclude that A was being dishonest.

The next step is to present a method to generate among N distant parties sequences of numbers with properties (i) to (iv). A possible quantum solution, probably not the only one, but maybe the most natural, is by distributing among the N parties an N -particle N -level singlet state of total spin zero. For arbitrary N these states can be expressed as

$$\mathcal{S}_N = \frac{1}{N!} \sum_{\text{permutations of } 01:::(N-1)}^X (1^t | j_1 j_2 :: n_i) \quad (1)$$

where t is the number of transpositions of pairs of elements that must be composed to place the elements in canonical order (i.e., $0;1;2;:::(N-1)$) and $|j_1:::(N-1)i\rangle$ denotes the tensor product state $|j_1\rangle |j_2\rangle \dots |j_N\rangle$. Particular examples of \mathcal{S}_N are:

$$\mathcal{S}_2 = \frac{1}{2} (|01\rangle - |10\rangle); \quad (2)$$

$$\mathcal{S}_3 = \frac{1}{6} (|012\rangle - |021\rangle - |102\rangle + |120\rangle + |201\rangle - |210\rangle); \quad (3)$$

$$\mathcal{S}_4 = \frac{1}{24} (|0123\rangle - |0132\rangle - |0213\rangle + |0231\rangle + |0312\rangle - |0321\rangle - |1023\rangle + |1032\rangle + |1203\rangle - |1230\rangle - |1302\rangle + |1320\rangle + |2013\rangle - |2031\rangle - |2103\rangle + |2130\rangle + |2301\rangle - |2310\rangle - |3012\rangle + |3021\rangle + |3102\rangle - |3120\rangle - |3201\rangle + |3210\rangle); \quad (4)$$

If we identify subsystem s with spin- $(N-1)/2$ particles and associate the state $|j_i\rangle$ with the eigenvalue s_i (N

1)=2 of the spin observable in some fixed direction, then \mathcal{F}_N is the only state of N particles of spin- $(N-1)/2$ which has total spin zero. A protocol to distribute and test \mathcal{F}_N among three parties is described in [24] and can easily be generalized to N parties. The test requires that the parties compare a sufficiently large subset of their particles which are subsequently discarded.

In the following, we shall assume that the N parties share a large collection of sets of N particles prepared in the state \mathcal{F}_N .

For our purposes, some interesting properties of the states \mathcal{F}_N are:

(a) They provide correlated results. As can be easily seen in Eq. (1), whenever the N parties measure the spin of the N separated particles along the direction used in Eq. (1), each of them finds a different result in the set $\{0, \dots, N-1\}$; thus such results satisfy requirements (ii) and (iii).

(b) Moreover, \mathcal{F}_N are N -lateral rotationally invariant. This means that if we act on any of them with the tensor product of the N rotation operators referring to all the particles for any arbitrary rotation, the result will be to reproduce the same state (within a possible phase factor). Therefore, whenever the N parties measure the spin of the N separated particles along any direction (but it must be the same direction for everyone), each of them finds a different result in the set $\{0, \dots, N-1\}$; thus such results satisfy requirements (ii) and (iii). Therefore, the direction of measurement could be randomly chosen and publicly announced (once the particles have been distributed among the parties) before any set of measurements.

(c) In order to accomplish (i), (iv), and (v), an essential property is nonseparability, that is, the quantum predictions for the states \mathcal{F}_N cannot be reproduced by any local hidden variables model in which the results of the spin measurements are somehow determined before the measurement. To show the nonseparability of \mathcal{F}_N we have to study whether they violate Bell's inequalities derived from the assumptions of local realism. Most Bell's inequalities require two alternative local dichotomic (taking values ± 1 or ± 1) observables A_j and B_j on each particle j . To test nonseparability, we will use the dichotomic local observables proposed by Peres in [26]. A Peres' observable A_k can be operationally defined as follows: to measure A_k , first measure the spin component of particle k along direction A , $S_A^{(k)}$. If particle k is a spin- s particle, then measuring $S_A^{(k)}$ could give $2s+1$ different results. Then assign value 1 to results $s, s-2$, etc. and value -1 to results $s-1, s-3$, etc. The operator representing observable A_k can be written as

$$\hat{A}_k = \sum_{m=-s}^s (-1)^s \mathcal{F}_A^{(k)} = m i S_A^{(k)} = m \hat{j} \quad (5)$$

where $\mathcal{F}_A^{(k)} = m i$ is the eigenstate of the spin component

along direction A of particle k .

Probably the simplest way to show the nonseparability [27] of the \mathcal{F}_N states is by considering the following scenario: N distant observers share N N -level particles in the \mathcal{F}_N state; the N observers can choose between measuring $A_j = A$ and $B_j = a$; the remaining m observers can choose between measuring $A_k = B$ and $B_k = b$. Then nonseparability can be tested by means of the following Bell's inequality, which generalizes to N particles the Clauser-Horne-Shimony-Holt (CHSH) inequality [28]

$$E_N(A; \dots; A; B; \dots; B) + E_N(A; \dots; A; b; \dots; b) + E_N(a; \dots; a; B; \dots; B) - E_N(a; \dots; a; b; \dots; b) \leq 2 \quad (6)$$

Note that this inequality uses only a subset of all possible correlation functions (for instance, it does not use $E_N(A; a; \dots; a; B; \dots; B)$). Restricting our attention to Peres' observables, for the states \mathcal{F}_N , the correlation function $E_N^{(m)}(A; \dots; A; B; \dots; B)$, which represents the expectation value of the product of the results of m measuring, for instance, N observables A , and m observables B is given by

$$E_N^{(N-1)} = (-1)^{f(N-2)} \frac{1}{N} \frac{\sin(N \alpha_{AB})}{\sin \alpha_{AB}}; \quad (7)$$

$$E_N^{(N-2)} = (-1)^{f(N-2)} \frac{1}{N+2} \left[1 + \frac{\sin[(N+1) \alpha_{AB}]}{\sin \alpha_{AB}} \right] \quad (8)$$

where α_{AB} is the angle between directions A and B and $f(x)$ gives the greatest integer less than or equal to x . In case of $m=1$, that is, using correlation functions of the $E_N^{(N-1)}$ type, we have found that states \mathcal{F}_N violate inequality (6) for any N . The maximum violation for $N=2$ is $2\sqrt{2}$, for $N=3$ is 2.552 , and for $N \rightarrow 1$ tends to 2.481 . In case of $m=2$, that is, using correlation functions of the $E_N^{(N-2)}$ type, we have found that the states \mathcal{F}_N violate inequality (6) for any N . The maximum violation for $N=4$ is 2.418 , for $N=5$ is 2.424 and for $N \rightarrow 1$ tends to 2.481 .

(d) Nonseparability is robust against the loss of any number of parties if they can publicly announce the results of their measurements. For instance, let us suppose that $N-2$ observers measure the spin along the same direction A and publicly announce their results. Then, if the missing results are j and k , the state shared by the remained two observers is

$$j i_N = \frac{1}{2} (\mathcal{F}_A = j; S_A = k i_N + \mathcal{F}_A = k; S_A = j i_N); \quad (9)$$

Note that $j i_N$ is formally similar to the singlet state of two qubits. However, it belongs to the N^2 -dimensional Hilbert space $H_N \otimes H_N$ and not to $H_2 \otimes H_2$, and therefore does not exhibit rotational symmetry. For Peres' observables, the corresponding correlation function is

$$E_N(A; B) = (-1)^N \cos^{N-1} \alpha_{AB}; \quad (10)$$

The states j_{i_N} violate the CHSH inequality. For $N = 2$ the maximum violation is $2\sqrt{2}$, for $N = 3$ the maximum violation is 2.414 , and for $N \rightarrow \infty$ tends to 2.324 .

A similar situation occurs when any number p of observers (not necessarily two) measure the same spin component and publicly announce their results. Then, the state shared by the remaining $N - p$ observers is formally similar to \mathcal{H}_{N-p} , but belongs to a N^2 -dimensional Hilbert space $H_N \otimes H_N$ and therefore does not exhibit rotational symmetry.

Therefore, returning to the secret sharing scenario, if some of the parties get caught by the enemy, and they are nevertheless able to publicly announce their results, the remaining parties still share pseudo \mathcal{H}_{N-p} states and could still use them for secret sharing.

In addition, other advantage of the protocol for secret sharing proposed here is that A_1 always prepares the same state (while in Ref. [16] A_1 must choose between four states) and all users perform spin measurements along the same direction (while in all previous protocols each user had to randomly choose between several measurements, and many of the results were not useful for the key and were therefore rejected).

Only very recently has it been possible to prepare optical analogs to the singlet states of two N -level systems for every N (although with good efficiency only for low N) [29] and to test Bell inequalities for two qutrits [30].

So far, of the states $\mathcal{H}_{N,i}$, only the simplest one, the singlet state of two qubits, has been created in a laboratory. Preparing the aforementioned states for $N = 3$ is a formidable physical challenge. The aim of this Letter has been to point out some potential applications and some interesting properties of these states in order to stimulate the interest in that challenge.

The author thanks N. David Mermin for stimulating conversations, the Spanish Ministerio de Ciencia y Tecnología Grant No. BFM 2001-3943, the Junta de Andalucía Grant No. FQM-239 and the organizers of the Conference Quantum Information: Quantum Entanglement (Sant Feliu de Guixols, Spain, 2002) for support.

Electronic address: adan@us.es

- [1] J.I. Cirac, during the Sixth Benasque Center for Science, 2000.
- [2] A. Einstein, B. Podolsky, and N. Rosen, Phys. Rev. 47, 777 (1935).
- [3] D. Bohm, Quantum theory, Prentice-Hall, Englewood Cliffs, New Jersey, 1951.
- [4] J.S. Bell, Physics (Long Island City, NY) 1, 195 (1964).
- [5] D.M. Greenberger, M.A. Home, and A. Zeilinger, in Bell's Theorem, Quantum Theory, and Conceptions of the Universe, edited by M. Kafatos (Kluwer, Dordrecht, 1989), p. 69.

- [6] R.F. Werner, Phys. Rev. A 40, 4277 (1989).
- [7] L. Hardy, Phys. Rev. Lett. 71, 1665 (1993); D. Boschi, S. Branca, F. De Martini and L. Hardy, Phys. Rev. Lett. 79, 2755 (1997).
- [8] M. Horodecki, P. Horodecki, and R. Horodecki, Phys. Rev. Lett. 80, 5239 (1998).
- [9] W. Dur, G. Vidal, and J. I. Cirac, Phys. Rev. A 62, 062314 (2000).
- [10] A.K. Ekert, Phys. Rev. Lett. 67, 661 (1991).
- [11] C.H. Bennett and S.J.W. Wiesner, Phys. Rev. Lett. 69, 2881 (1992).
- [12] C.H. Bennett, G. Brassard, C. Crépeau, R. Jozsa, A. Peres, and W.K. Wootters, Phys. Rev. Lett. 70, 1895 (1993).
- [13] R. Cleve and H. Buhrman, Phys. Rev. A 56, 1201 (1997).
- [14] M. Żukowski, A. Zeilinger, M.A. Home, and H. Weinfurter, Acta Phys. Pol. 93, 187 (1998).
- [15] M. Hillery, V. Bužek, and A. Berthiaume, Phys. Rev. A 59, 1829 (1999).
- [16] A. Karlsson, M. Koashi, and N. Imoto, Phys. Rev. A 59, 162 (1999).
- [17] J. Lee and M.S. Kim, Phys. Rev. Lett. 84, 4236 (2000).
- [18] A. Cabelló, Phys. Rev. Lett. 85, 5635 (2000).
- [19] P. Xu, C.-F. Li, and G.-C. Guo, Phys. Rev. A 64, 032305 (2001).
- [20] P. Highsmith, Strangers on a Train (Harper and Brothers, New York, 1950); A. Hitchcock, Strangers on a Train (Warner Brothers, Hollywood, CA, 1951).
- [21] Or in more general, non-criminal, terms: each of N parties must perform one among N different tasks which they do not want to perform themselves. However, each party volunteers to perform some other party's task.
- [22] Of course, A_i has a probability of $1/N$ to have to kill his/her own victim B_i . But this only means that A_i has not solved his/her problem, which is not a problem for the remaining parties.
- [23] L. Lamport, R. Shostak, and M. Pease, ACM Trans. Programming Languages Syst. 4, 382 (1982).
- [24] M. Fitz, N. Gisin, and U. Maurer, Phys. Rev. Lett. 87, 217901 (2001).
- [25] C.H. Bennett and G. Brassard, Proc. of IEEE Int. Conf. on Computers, Systems, and Signal Processing (Bangalore, India, 1984) (IEEE, New York, 1984), p. 175.
- [26] A. Peres, Phys. Rev. A 46, 4413 (1992).
- [27] We have found that $\mathcal{H}_{3,i}$ violates Mermin's inequality for three observers and two alternative measurements per observer [N.D. Mermin, Phys. Rev. Lett. 65, 1838 (1990)]. The value found for the corresponding combination of quantum correlations is 2.224 , while 2 is the maximum value allowed by local models. Curiously, this value can be found even if one of the three observers always measures along the same direction. A more detailed study of the entanglement and nonseparability of the states $\mathcal{H}_{N,i}$ will be presented elsewhere.
- [28] J.F. Clauser, M.A. Home, A. Shimony, and R.A. Holt, Phys. Rev. Lett. 23, 880 (1969).
- [29] A. Las-Linares, J.C. Howell, and D. Bouwmester, Nature (London) 412, 887 (2001).
- [30] J.C. Howell, A. Las-Linares, and D. Bouwmester, Phys. Rev. Lett. 88, 030401 (2002).