

A quantitative comparison of sRNA-based and protein-based gene regulation

Pankaj Mehta^{1,*}, Sidhartha Goyal^{2,*} and Ned S. Wingreen¹

¹Department of Molecular Biology, Princeton University, Princeton, NJ 08544
and ²Department of Physics, Princeton University, Princeton, NJ 08544

* Corresponding authors. P Mehta, Department of Molecular Biology, Princeton University, Princeton, NJ 08544, USA. Tel: 609 258 8696; Fax: 1 609 258 8616; Email: pmehta@princeton.edu and S Goyal, Department of Physics, Princeton University, Princeton, NJ 08544, USA. Tel: 1 609 240 9316; Fax: 1 609 258 8616; Email: goyal@princeton.edu

November 16, 2021

Subject categories: Metabolic and regulatory networks; Signal Transduction; RNA

Keywords: genetic networks / small RNA / signal processing / biophysics

Character count: 47450

Abstract

Small, non-coding RNAs (sRNAs) play important roles as genetic regulators in prokaryotes. sRNAs act post-transcriptionally via complementary pairing with target mRNAs to regulate protein expression. We use a quantitative approach to compare and contrast sRNAs with conventional transcription factors (TFs) to better understand the advantages of each form of regulation. In particular, we calculate the steady-state behavior, noise properties, frequency-dependent gain (amplification), and dynamical response to large input signals of both forms of regulation. While the mean steady-state behavior of sRNA-regulated proteins exhibits a distinctive tunable threshold-linear behavior, our analysis shows that transcriptional bursting leads to significantly higher intrinsic noise in sRNA-based regulation than in TF-based regulation in a large range of expression levels and limits the ability of sRNAs to perform quantitative signaling. Nonetheless, we find that sRNAs are better than TFs at filtering noise in input signals. Additionally, we find that sRNAs allow cells to respond rapidly to large changes in input signals. These features suggest a “niche” for sRNAs in allowing cells to transition quickly yet reliably between distinct states. This functional niche is consistent with the widespread appearance of sRNAs in stress-response and quasi-developmental networks in prokaryotes. (**Supporting Information available at www.princeton.edu/~pmehta/publication.html**)

Introduction

It is now clear that small non-coding RNAs (sRNAs) play a crucial role in prokaryotic gene regulation as both positive and negative regulators. sRNAs are involved in many biological functions including quorum sensing (Lenz *et al.*, 2004; Fuqua *et al.*, 2001), stress response and virulence factor regulation (Gottesman, 2004; Majdalani *et al.*, 2005; Storz *et al.*, 2004; Storz *et al.*, 2005), and the regulation of outer-membrane proteins (Vogel and Papenfort, 2006; Guillier *et al.*, 2006). One major class of prokaryotic sRNAs (antisense sRNAs) negatively regulate proteins by destabilizing the target protein’s mRNA (Fig. 1). These ~ 100 bp antisense sRNAs prevent translation by binding to the target mRNAs in a process mediated by the RNA chaperone Hfq (Lenz *et al.*, 2004; Gottesman, 2004). Upon binding, both the mRNAs and sRNAs are degraded (Gottesman, 2004), suggesting that prokaryotic sRNAs - unlike their eukaryotic counterparts - act stoichiometrically on their targets. Other antisense sRNAs positively regulate protein expression by promoting ribosome binding to target mRNAs, also in a stoichiometric fashion (Gottesman, 2004).

Whereas transcription factor (TF)-based regulation is ubiquitous in prokaryotic gene circuits (Ptashne and Gann, 2001), thus far sRNAs have largely been found in circuits responding to strong environmental cues (e.g. extreme nutrient limitation). This leads to a natural question: are transcriptional regulation by TFs and post-transcriptional regulation by sRNAs distinctly well suited for different biological tasks?

To address this question, we report a quantitative comparison of the signaling properties of TF-based and sRNA-based gene regulation. In general, a signaling system can be characterized by how it processes different types of inputs. We therefore treat TF-based and sRNA-based regulation as signal-processing systems with an input signal – the average concentration of the TFs controlling RNA transcription rates – and an output signal – the average level of the regulated protein (Ptashne and Gann, 2001) – and calculate engineering properties of the system such as the steady-state behavior, noise properties, frequency-dependent gain (amplification), and dynamical response to large input signals (Detwiler *et al.*, 2000) (see Fig. 1.)

1 Results

In the main text, we focus on the case where sRNAs negatively regulate a target mRNA. Positive regulation by sRNAs is discussed in the Supplementary Information (SI). Post-transcriptional regulation via sRNAs is modeled using mass-action equations with three molecular species: the number of sRNA molecules s , the number of target mRNA molecules m , and the number of regulated protein molecules p (Elf *et al.*, 1995; Elf *et al.*, 2003; Lenz *et al.*, 2004; Levine *et al.*, 2007; Mitarai *et al.*, 2007; Shimoni *et al.*, 2007). The effect of intrinsic noise is modeled by Langevin terms, $\hat{\eta}_j$, that describe the statistical fluctuations in the underlying biochemical reactions (van Kampen, 1981). The kinetics of the

various species are described by the differential equations

$$\begin{aligned}
\frac{ds}{dt} &= \alpha_s - \tau_s^{-1}s - \mu ms + \hat{\eta}_s + \hat{\eta}_\mu \\
\frac{dm}{dt} &= \alpha_m - \tau_m^{-1}m - \mu ms + \hat{\eta}_m + \hat{\eta}_\mu \\
\frac{dp}{dt} &= \alpha_p m - \tau_p^{-1}p + \hat{\eta}_p.
\end{aligned} \tag{1}$$

The terms can be interpreted as follows. sRNAs (mRNAs) are transcribed at a rate α_s (α_m), and are degraded at a rate τ_s^{-1} (τ_m^{-1}). Additionally, sRNAs and mRNAs are *both* stoichiometrically degraded by pairing via Hfq at a rate that depends on the sRNA-mRNA interaction strength μ . Proteins are translated from mRNAs at a rate α_p and are degraded at a rate τ_p^{-1} .

The Langevin terms, $\hat{\eta}_j$, model intrinsic noise by treating the birth and death processes of the various species in Eq. (1) as independent Poisson processes (van Kampen, 1981). $\hat{\eta}_s$, $\hat{\eta}_m$, and $\hat{\eta}_p$ model the noise in the creation and degradation of individual sRNAs, mRNAs, and the regulated protein, respectively. $\hat{\eta}_\mu$ models sRNA-mRNA mutual-degradation noise. The Langevin terms are characterized within the linear-noise approximation by two-point time-correlation functions ($j = s, m, p, \mu$), which for steady states take the form

$$\langle \hat{\eta}_j(t) \hat{\eta}_j(t') \rangle = \sigma_j^2 \delta(t - t') \tag{2}$$

with $\sigma_s^2 = \alpha_s + \tau_s^{-1}\bar{s}$, $\sigma_m^2 = \alpha_m + \tau_m^{-1}\bar{m}$, $\sigma_p^2 = 2\tau_p^{-1}\bar{p}$, and $\sigma_\mu^2 = \mu\bar{m}\bar{s}$ where \bar{s} , \bar{m} and \bar{p} denote the mean number of sRNA, mRNA, and protein molecules, respectively. Notice we have separated the noise due to RNA production and degradation, $\hat{\eta}_s$ and $\hat{\eta}_m$, from the noise due to the binary reaction between mRNAs and sRNAs, $e\hat{t}a_\mu$. This allows us to write Eq. 2 in terms of four independent Langevin terms while still capturing the cross-correlation between sRNAs and mRNAs.

Recent evidence suggests that prokaryotic transcription may occur with RNA molecules being made in short intense bursts (Golding *et al*, 2005). The effects of transcriptional bursting can be incorporated into our model by allowing two states of gene activation, as reviewed below (for a detailed discussion see Paulsson, 2005). Specifically, genes can be in a transcriptionally inactive “off” state or in a transcriptionally active “on” state. The *average* transcription rate of RNA, α_j ($j = m, s$) in Eq. (1), is then related to the probability of the relevant gene being on, g_j^{on} , by

$$\alpha_j = g_j^{\text{on}} \alpha_j^{\text{on}} \tag{3}$$

with α_j^{on} being the mean transcription rate of the relevant RNA when the gene is always on. We model the dynamics of a repressor-controlled gene using the equation

$$\frac{dg^{\text{on}}}{dt} = k_-(1 - g^{\text{on}}) - k_+g^{\text{on}} + \hat{\eta}_g, \tag{4}$$

where k_- and k_+ are the unbinding and binding rates of the repressor and $\hat{\eta}_g$ is a Langevin noise term. At steady state, it follows from the fluctuation-dissipation theorem that $\langle \hat{\eta}_g(t) \hat{\eta}_g(t') \rangle = \sigma_g^2 \delta(t-t')$ with $\sigma_g^2 = 2k_+ g^{\text{on}}$ (Bialek and Setayeshgar, 2005). Thus, a full model that includes transcriptional bursting is described by Eq. 1 in conjunction with Eqs. (3) and (4).

For completeness, we also briefly review the equations describing transcriptional regulation (Elowitz *et al.*, 2002; Thattai and van Oudenaarden, 2001; Paulsson, 2004; Swain *et al.*, 2002). The kinetics of transcription regulation is modeled using the Langevin equations

$$\begin{aligned} \frac{dm}{dt} &= \alpha_m - \tau_m^{-1} m + \hat{\eta}_m \\ \frac{dp}{dt} &= \alpha_p m - \tau_p^{-1} p + \hat{\eta}_p \end{aligned} \quad (5)$$

with m the number of mRNA molecules, p the number of proteins, α_m the average rate of transcription, α_p the average rate of translation, and τ_m^{-1} and τ_p^{-1} the first-order degradation rates of mRNA molecules and proteins, respectively. The two Langevin terms, $\hat{\eta}_m$ and $\hat{\eta}_s$, model noise in the synthesis and degradation of the mRNA and protein, respectively, (see SI) and obey the equations ($j = m, p$)

$$\langle \hat{\eta}_j(t) \hat{\eta}_j(t') \rangle = 2\tau_j^{-1} j \delta(t-t'). \quad (6)$$

The effects of transcriptional bursting can also be included in this model using Eqs. (3) and (4).

Mean steady-state protein number

The mean steady-state protein number for regulation via sRNAs can be approximated by ignoring the Langevin terms and setting the time-derivatives to zero in Eq. 1 (see Supporting information (SI) and Paulsson, 2004, Levine *et al.*, 2007) The mean as calculated within this mean-field approximation may differ from the actual mean especially where noise is large. Nonetheless, the qualitative steady-state behavior of the mean can be understood within this approximation.

As shown in (Levine *et al.*, 2007) and (Elf *et al.*, 2005), the mean protein number exhibits a threshold-linear behavior as a function of the mRNA transcription rate α_m , with the threshold at α_s (see Fig. 2). This behavior should be contrasted with transcriptional regulation via TFs for which the mean protein number is a linear function of α_m (Elowitz *et al.*, 2002; Thattai and van Oudenaarden, 2001; Paulsson, 2004; Swain *et al.*, 2002). For sRNA-based regulation, the mean steady-state protein number depends on RNA transcription rates only through the difference $\alpha_m - \alpha_s$, and this dependence can be characterized by three distinct regimes: repressed $\alpha_s \gg \alpha_m$, expressing $\alpha_s \ll \alpha_m$, and a crossover regime $\alpha_s \approx \alpha_m$. Increasing the sRNA-mRNA interaction strength μ results in a sharper crossover between the repressed and expressing regimes. The dashed line in Fig. 2 depicts the $\mu \rightarrow \infty$ threshold-linear behavior.

In the repressed regime, on average, there are many more sRNAs transcribed than mRNAs. Consequently, almost all free mRNAs are quickly bound by sRNAs and degraded. This results in low levels of expression of the regulated protein. By contrast, in the expressing regime the average number of mRNAs greatly exceeds the number of sRNAs. The sRNAs degrade only a small fraction of the total mRNA population so mRNAs accumulate and are translated into proteins.

Signal transduction

To compare the signal-transduction properties of sRNA-based regulation with TF-based regulation, we consider the two regulation schemes as signal-processing systems. Figure 1 depicts how sRNA-based regulation, e.g. in quorum sensing, can be viewed as a signal-processing system (see also SI and Fig. 3). In the context of quorum sensing, the input signal is the time-averaged number of phosphorylated LuxO (LuxO~P) molecules in the cell, which, after a series of intermediate biochemical reactions, is converted into the output signal, the average number of LuxR molecules. Fluctuations in LuxO~P and LuxR about their averages can be thought of as the input and output noise, respectively. The noise in the output is a combination of *input noise* – fluctuations in the input signal, *intrinsic noise* – stochasticity inherent in gene regulation, and *extrinsic noise* – other sources of noise impinging on the signal-processing system not explicitly considered in the model, such as ribosome and RNA-polymerase fluctuations.

The fidelity of a signaling system is ultimately limited by the output noise of the system. The output noise, defined as the ratio of the variance in the output-protein number to the square of the mean output-protein number, can be thought of as the square of the “percentage error” in the output. The higher the output noise, the poorer the signaling fidelity of a gene-regulation scheme. Thus, examining the noise properties of sRNA-based and transcription-factor gene regulation is important for comparing these two forms of gene regulation.

Gene regulation takes place as part of a larger genetic and biomolecular network whose purpose is to convert a measured signal into a concentration of the regulated protein. A simple but important observation is that sRNA-based regulation also requires protein regulators in order to couple to external signals. In particular, a protein regulator is necessary to vary the transcription rate of the sRNAs in response to an input. For this reason, we take as the input signal to both systems a protein that either transcriptionally regulates the relevant protein directly or else transcriptionally regulates the sRNAs. In the case of direct transcriptional regulation, the protein regulator acts as a repressor whereas for post-transcriptional, sRNA-based regulation, it acts as an activator (see Fig. 3). Furthermore, the kinetics of the protein regulator are chosen to be identical in both cases. The upstream components of the network that controls the level of the relevant protein regulator are also assumed to be identical. This allows for a principled comparison of the two regulatory schemes.

Intrinsic noise

Gene regulation is intrinsically noisy. In this paper, we define intrinsic noise as the fluctuations in the output-protein number, given a fixed steady-state input, due to the stochastic nature of the underlying biochemical reactions. When calculating intrinsic noise we neglect the contributions to output noise from fluctuations in the input and from extrinsic noise sources such as variations in the number of ribosomes and RNA polymerase molecules (see Fig. 1).

We start by summarizing the noise properties of transcriptional regulation. For ordinary transcriptional regulation by a repressor, the intrinsic noise – defined as the variance in protein number divided by the mean protein number squared, σ_p^2/\bar{p}^2 , is given by (Elowitz *et al*, 2002; Thattai and van Oudenaarden, 2001; Paulsson, 2004; Swain *et al*, 2002; Golding *et al*, 2005; Paulsson, 2005) (and SI):

$$\eta_{\text{int}}^{\text{TF}} = \frac{\sigma_p^2}{\bar{p}^2} = \frac{(1+b)}{\bar{p}} + \frac{(p_{\text{max}} - \bar{p})\bar{p}^2}{\bar{p} + k_- \tau_p p_{\text{max}}} \quad (7)$$

where $b = \alpha_p \tau_m$ is the protein burst size (the average number of proteins made from an mRNA molecule) and $p_{\text{max}} = \alpha_m \alpha_p \tau_m \tau_p$ is the mean protein level in the absence of repressor. The first term in Eq. (7) captures the noise due to translational bursting (the protein burst from each mRNA due to the translation of multiple proteins from each mRNA molecule) and the second captures the noise due to transcriptional bursting (the RNA burst while no repressor is bound). The transcriptional bursting contribution is typically much smaller than that of translational bursting since the unbinding rate of the repressor is generally much faster than the protein degradation rate, $k_- \tau_p \gg 1$. Consequently, the intrinsic noise for protein-based regulation is often approximated as $\sigma_p^2/\bar{p}^2 \approx (1+b)/\bar{p}$.

The intrinsic noise of an sRNA-regulated protein differs significantly from that of a transcriptionally regulated protein. Noise in stoichiometrically coupled systems such as sRNA-based gene regulation has been studied previously (Elf and Ehrenberg, 2003; Elf *et al*, 2003; Paulsson and Ehrenberg, 2001). It was found by Elf *et al*, 2005 that the ultrasensitivity of stoichiometric systems in the crossover regime necessarily gives rise to enhanced stochastic fluctuations. This "near-critical" behavior was related to the behavior at phase transitions where fluctuations also diverge (McNeil and Wall, 1974). We have extended these previous analyses to the context of gene regulation by sRNAs, and have calculated the intrinsic protein noise within the linear-noise approximation (see SI and (van Kampen, 1981; Elf and Ehrenberg, 2003)), including the effects of transcriptional and translational bursting. We have checked our results using exact stochastic simulations (see SI and Figs. SI-2 and SI-3). The simulations confirm the existence of three regimes and verify that noise is enhanced in the crossover region due to critical fluctuations.

The full expressions for the intrinsic noise are lengthy and in the main text we present only our major findings. Figs. 4 and 5 show typical intrinsic noise profiles as functions of the transcription-rate ratio, α_s/α_m , and of the average protein level of the regulated protein, for various magnitudes of transcriptional

bursting. For a given sRNA-mRNA interaction strength μ , the intrinsic noise increases with larger transcriptional bursts (smaller k_-). Furthermore, for a fixed k_- , the intrinsic noise increases with increasing sRNA-mRNA interaction strength μ (see Fig. SI-1 and Elf and Ehrenberg, 2003). The intrinsic noise is small in the repressed regime $\alpha_s \gg \alpha_m$, and shows a pronounced peak in the crossover region, $\alpha_s \approx \alpha_m$ (see Fig. 4) as expected for a stoichiometric system. We have also obtained simplified, asymptotic expressions for the noise in the repressing and expressing regimes when $\tau_m \ll \tau_p$, and there is no transcriptional bursting (see SI). The expressions for the intrinsic noise in the repressing and expressing regimes are given by, respectively:

$$\eta_{\text{int}}^{\text{rep}} \approx \frac{(1 + b_{\text{eff}})}{\bar{p}} + \frac{\bar{p}}{p_{\text{max}}} \frac{\mu \tau_s \tau_m}{\tau_p}, \quad (8)$$

(where $p_{\text{max}} = \alpha_p \tau_m \alpha_m \tau_p$ and $b_{\text{eff}} = b(\bar{p}/p_{\text{max}}) \ll b$ is the new “effective” protein burst size (see SI and (Levine *et al*, 2007)), and

$$\eta_{\text{int}}^{\text{exp}} \approx \frac{(1 + b)}{\bar{p}} + \frac{p_{\text{max}}}{\bar{p}^4} \frac{\alpha_p^3 \tau_p}{\mu^2}. \quad (9)$$

We have written these expressions so that the contribution of sRNA-mRNA mutual-degradation noise is contained entirely in the second term of Eqs.(8) and(9).

Comparing the intrinsic noise of protein- and sRNA- based regulators in Fig. 5, we observe that sRNA regulators are significantly less noisy than TFs in the repressed regime. The dominant source of intrinsic noise for a TF-regulated protein, in the limit $\tau_m \ll \tau_p$, is that proteins are made in bursts of average size $b \gg 1$. For an sRNA-regulated protein, the average size of a protein burst, b_{eff} , is much smaller (see Eq. 8). This can be understood by noting that there are many more sRNAs than mRNAs in the repressed regime, and therefore any free mRNA is quickly bound by an sRNA and degraded. This leads to a reduction in the effective mRNA lifetime and consequently a reduced b_{eff} (Levine *et al*, 2007). The reduction in effective mRNA lifetimes and intrinsic noise takes place even when mRNAs and sRNAs are produced in bursts.

The fidelity of a signaling system can be characterized by the output noise $(\sigma_p^{\text{total}})^2/\bar{p}^2$. In general, high-fidelity signaling requires $(\sigma_p^{\text{total}})^2/\bar{p}^2 \ll 1$. Thus, from Fig. 5 it is clear that over a large range of output protein levels the large intrinsic noise due to transcriptional bursting makes it difficult for sRNAs to perform high-fidelity signaling.

One of the most striking features of Fig. 5 is that sRNA-based regulation is much more sensitive to transcriptional bursting than is protein-based regulation. For sRNAs, transcriptional bursting greatly enhances the near-critical fluctuations because the production of RNAs in bursts increases the anti-correlated sRNA-mRNA fluctuations in the crossover regime (see Elf *et al*, 2003; Elf and Ehrenberg, 2003 for more on the near-critical fluctuations). In contrast for transcriptional regulation directly by a TF, the contribution of transcriptional bursting to the intrinsic noise is relatively small for most choices of parameters

(see Fig. 5). Since recent experiments suggests that prokaryotic transcription may generically produce RNAs in bursts (Golding *et al*, 2005), this is likely to be a physiologically relevant effect for sRNA-based gene regulation.

The large intrinsic noise in the crossover regime, $\alpha_s \approx \alpha_m$ can be understood by considering the special case $\alpha_s = \alpha_m$ for very strong sRNA-mRNA binding, $\mu \rightarrow \infty$. In this limit, sRNAs and mRNAs, transcribed at the same average rate, quickly bind to each other and degrade and almost no protein is made. However, once in a while there is a fluctuation that produces more mRNAs than average. In this case, unless there is a corresponding fluctuation in sRNAs, the mRNAs cannot be degraded by sRNA-mRNA binding. The mRNAs produced in such a fluctuation will degrade by the usual slow degradation rate τ_m^{-1} resulting in a large burst of protein production, contributing to the large intrinsic noise. Transcriptional bursting further increases the magnitude of the aforementioned sRNA and mRNA fluctuations and consequently further increases the intrinsic noise in the crossover regime.

Gain and Filtering

We now consider, in the absence of noise, the change in output-protein number about some steady state or “operating point” in response to a small, time-varying input signal. A small time-varying change from the steady-state value of the number of proteins controlling the sRNA transcription rate, $\delta c(t) = c(t) - \bar{c}$, results in a corresponding time-varying change of the output-protein number from its steady-state value, $\delta p(t) = p(t) - \bar{p}$. For small enough signals, the dynamics are captured by linearized versions of the mass-action equations (Eq. 1) (see SI). In the frequency-domain, the relationship between the output protein response at frequency ω and the input signal at frequency ω takes the simple form

$$\delta \tilde{p}(\omega) = \tilde{g}(\omega) \delta \tilde{c}(\omega) \quad (10)$$

where the frequency-dependent gain is given by

$$\tilde{g}(\omega) \propto \underbrace{\frac{k_+ g^{\text{on}}}{i\omega + \tau_g^{-1}}}_{\text{I}} \underbrace{\frac{\mu \bar{m} \alpha_s^{\text{on}}}{(i\omega + \tau_+^{-1})(i\omega + \tau_-^{-1})}}_{\text{II}} \underbrace{\frac{\alpha_p}{i\omega + \tau_p^{-1}}}_{\text{III}}, \quad (11)$$

with $\tau_g = k_- + k_+$ the characteristic time the sRNA gene is ”on” and τ_{\pm} two times related to – and of the same order of magnitude as– the mRNA and sRNA lifetimes (see SI for exact definition of τ_{\pm}). Each term of the form $(i\omega + \tau^{-1})^{-1}$ can be interpreted as a low-pass filter with cut-off frequency τ^{-1} . The four low-pass filters in the frequency-dependent gain come from different intermediate-steps: **I** from the binding-unbinding of the protein regulator (activator), **II** from the transcription of RNAs and the sRNA-mRNA interaction, and **III** from the translation of mRNAs into proteins. The amplitude of the frequency-dependent gain decreases rapidly $\propto \omega^{-4}$ at high frequencies. This can be compared to the the gain in TF-based regulation which has only three low-pass filters and falls of at high frequencies $\propto \omega^{-3}$ (see Figure 6 and SI) . Thus, we conclude that

sRNA-based regulation is less sensitive to high-frequency input noise than is TF-based regulation.

The underlying reason for the enhanced noise filtering properties of sRNAs is that sRNA-based regulation involves an additional step when compared to transcriptional regulation. Namely, the input signal from upstream components in the genetic network is transmitted to the mRNAs encoding the output protein via sRNAs, which corresponds to an additional noise filter. This extra filtering could also be achieved by introducing an additional layer of transcriptional regulation in the genetic network. However, adding an extra layer of transcriptional regulation also leads to a slower kinetic response of the signaling network to changes in the input signal because an additional protein regulator must be synthesized or degraded in order to transmit signals. This kinetic cost is much smaller for sRNA-based regulation (see below). Consequently, sRNA-based regulation allows for an extra layer of noise filtering without sacrificing the ability to respond quickly to changes in input.

The above results hold only when the input signal is coupled to the sRNAs. Small input signals can also modulate the transcription of the protein-coding mRNAs instead of the sRNAs. In this case, at high frequencies, the gain falls off as $\propto \omega^{-3}$ as in TF-based regulation since the input signal does not pass through the sRNAs (see SI). Thus, coupling the input signal to sRNAs instead of mRNAs is necessary to achieve the advantageous high-frequency filtering properties of sRNA-based gene regulation. This may explain why input signals are often found coupled to the sRNAs rather than to the mRNAs in sRNA-based regulatory circuits.

Fidelity of small-signal response

Intrinsic noise limits the ability of a signaling system to faithfully respond to small signals. Typically, the ability of a system to transduce small signals is quantified by its gain (amplification factor) (Detwiler *et al*, 2000; Elf *et al*, 2003; Elf and Ehrenberg, 2003). A large gain is interpreted to mean the system can differentiate small changes in the input signal. However, even if the gain is large, if there is also high intrinsic noise – as is the case in sRNA-based regulation – it may be impossible to distinguish the output signal from the output noise (see Detwiler *et al*, 2000 and SI). Furthermore, the gain often depends on how input and output signals are defined (e.g. logarithmic gain versus linear gain). For this reason, we consider an alternative measure to compare the small-signal responses of sRNA- and protein-based regulators, namely the minimal signal that can be faithfully transmitted by the system (Detwiler *et al*, 2000).

As discussed above, the noise in the output protein limits the detection of small input signals. In order for an input signal to be detectable, the corresponding output signal must be greater than the output noise (Detwiler *et al*, 2000). In particular, the power of the output signal must be greater than the power of the output noise. Consider a periodic input signal at a frequency ω_0 and amplitude δc_{ω_0} , $\delta c_{\omega_0} e^{i\omega_0 t}$. For small input signals, the output signal is related to the input signal by the frequency-dependent gain $g(\omega)$. Thus, the

output signal is $O(t) = g(\omega_0)\delta c_{\omega_0}e^{i\omega_0 t}$ and the power of the output signal is by definition

$$\begin{aligned} \text{Power}_{\text{sig}} &= \omega_0 \int_0^{1/\omega_0} dt |O(t)|^2 \\ &= |g(\omega_0)\delta c_{\omega_0}|^2. \end{aligned} \quad (12)$$

On the other hand, the power of the output noise is calculated by integrating fluctuations over all frequencies, and is given within the linear-noise approximation by the expression

$$\text{Power}_{\text{noise}} = \int \frac{d\omega'}{2\pi} \frac{d\omega''}{2\pi} \delta p^*(\omega') \delta p(\omega'') = \sigma_p^2 \quad (13)$$

where $\delta p(\omega')$ is just the fluctuation in the output-protein level at a frequency ω due to intrinsic noise as calculated in the SI. For a signal to be detectable, we must have

$$\begin{aligned} \text{Power}_{\text{sig}} &\geq \text{Power}_{\text{noise}} \\ |g(\omega_0)\delta c_{\omega_0}|^2 &\geq \sigma_p^2. \end{aligned} \quad (14)$$

For a step-input signal with amplitude δc_o ($\omega_0 \rightarrow 0$ in the above expressions), the requirement that the output signal is larger than the noise sets a lower-bound on the detectable input signal $\delta c_o^{\text{min}} \geq \sigma_p/g_o$ (Detwiler *et al*, 2000). Of course, by time-averaging the output, one can reduce the output noise and hence detect smaller signals, but this does not affect our comparison. Therefore, we computed the minimum input signal without time-averaging for both sRNA-based and TF-based regulation and found that, for even moderate amounts of transcriptional bursting, protein regulators are better than sRNAs at responding to small signals across the whole range of output-protein levels. At low protein levels (repressed regime), the minimum detectable signal for sRNA-based regulation is larger due to the lower gain for sRNA-based regulation than for TF-based regulation. At intermediate to high levels of output protein (crossover and expressing regimes), the minimum detectable signal for sRNAs is also larger due to the large protein noise σ_p^2 arising from transcriptional bursting for sRNA-based regulation.

Consequently, contrary to previous speculations (Levine *et al*, 2007), results indicate that sRNA-based regulation is unlikely to be useful for amplifying small signals despite the large gain of sRNA-based regulation in the crossover region. Our results also imply that it is more advantageous to use transcription factor-based regulation than sRNA-based regulation in genetic networks designed to respond to small changes in upstream components.

Large-signal response

In nature, an organism may benefit from switching quickly between two different gene-expression states in response to a large persistent input signal. We have

compared here the rates at which a regulated protein can switch between an “off” and “on” state in response to an input signal when its mRNA is directly regulated by a TF or indirectly regulated by an sRNA.

Fig. 7 shows the time evolution of the average mRNA level for both sRNA-based and TF-based regulation in response to a step change in the input. The response for sRNA-based regulation depends on the initial conditions, and can be tuned by changing where in the repressed regime the system is initially. In particular, the effective mRNA degradation (and dilution) rate depends on the sRNA pool size and on the sRNA-mRNA interaction strength μ . However, our conclusions do not strongly depend on the choice of parameters (see SI).

We find that using sRNAs to switch protein expression on, i.e., going from low output-protein number to high output-protein number, is slower than direct TF regulation. This slower response is due to the sRNA pool that needs to be depleted before target mRNAs can accumulate. On the other hand, sRNA-based regulation can be faster than TF-based regulation when switching off expression of a protein – the large input signal rapidly increases the concentration of sRNAs resulting in fast degradation of target mRNAs (see Fig. 7 and Shimoni *et al.*, 2007). The slower response of the sRNA-based regulation at turning on protein expression stems from the delay introduced by having an additional layer of sRNA regulation in the signal transduction pathway when compared with protein-based regulation (see Fig. 7). However, this delay is much smaller than that which would be introduced by having an additional layer of transcriptional regulation since the synthesis and degradation rates of proteins are much slower than those of RNAs (see SI for a discussion comparing our results with Shimoni *et al.*).

Thus far we have considered the case where a protein is negatively regulated by sRNAs. However, a protein can also be positively regulated by sRNAs (see (Storz *et al.*, 2004; Hammer and Bassler, 2007 and SI), and in this case switching protein expression on using sRNAs can be faster than TF-based regulation. Typically, sRNAs positively regulate protein expression by preventing the formation of inhibitory secondary structures that occlude the ribosome binding sites of the regulated mRNA. Since there is generally a background pool of translationally-inactive target mRNAs, a large input signal that produces sRNAs allows the target mRNAs to be quickly converted into the translationally-active form.

Discussion

Small non-coding RNAs (sRNAs) play an important regulatory role in prokaryotic gene circuits. sRNAs are involved in a variety of critical physiological tasks such as quorum sensing, stress response, and the regulation of outer-membrane proteins. Yet, sRNAs are not currently thought to be as common as transcription factors (TFs) in prokaryotic gene regulatory circuits (at least based on our present knowledge), suggesting sRNAs may be well suited for certain biological tasks but not for others. This paper evaluates the suitability of sRNA-based regulation to particular biological tasks by treating gene regulation as a signal-

processing system.

Our analysis shows that for a large (intermediate to high) range of output-protein levels, the intrinsic noise for sRNA-based regulation is much larger than for TF-based regulation. However, even at a high level of transcriptional bursting, sRNA-based regulation is less noisy than TF-based regulation at low protein levels (in the repressed regime) because a large pool of sRNAs shortens the effective mRNA lifetime and buffers against target mRNA fluctuations. Thus, in all cases, protein expression can be kept off much more reliably by sRNAs than by TFs (see SI for a discussion of the dependence on kinetic parameters). We also find (when the input signal is coupled to the sRNAs) that sRNAs are better filters of high-frequency input noise than TFs since they implement an extra low-pass filter compared to TFs. This is likely to be physiologically relevant since sRNAs are often found in networks that couple to external signals (Majdalani *et al*, 2005). In such networks, high-frequency noise in the input could arise from noise in external concentrations or from the fast upstream protein-modification reactions such as phosphorylation-dephosphorylation of a two-component system. sRNAs also allow cells to respond quickly to large changes in input signal. In particular, sRNAs can quickly turn off negatively regulated genes and quickly turn on positively regulated genes (Shimoni *et al*, 2007). This ability to filter high-frequency noise without compromising the ability to rapidly respond to input signals is a defining feature of sRNAs. The above characteristics make sRNA-based regulation useful for constructing genetic switches. In contrast, even for moderate levels of transcriptional bursting, sRNA-based regulatory circuits are worse than TFs at transducing small input signals, suggesting that TFs are likely better suited for quantitative adjustment of protein expression. Additionally, the use of sRNAs in more complex network motifs such as feed-forward loops is likely to give rise to new behaviors (Shimoni *et al*, 2007). Our results are summarized in Table 1.

Indeed, sRNAs are often found in genetic circuits that switch gene-expression states in response to strong environmental cues. For example under iron limitation, the sRNA RyhB rapidly shuts off synthesis of several iron-binding proteins, making iron available for essential proteins (Masse and Gottesman, 2002). In the quorum-sensing network of *Vibrio harveyi* and of the human pathogen *Vibrio cholerae*, multiple sRNAs (Qrr1-5) switch the expression state of the cell in response to external cell density (Lenz *et al*, 2004). The fast dynamical response of sRNA-based regulation, accelerated by the presence of five sRNAs, may allow the pathogen *V. cholerae* to quickly switch expression states in response to a sudden change in the environment – for example, from a high bacterial cell density in a eukaryotic host to low cell density in the marine environment (Hammer and Bassler, 2007; Zhu *et al*, 2002). Recent modeling work by (Shimoni *et al*, 2007) suggests that the kinetic properties of sRNAs are crucial to understanding the behavior of *E. coli* regulatory circuits involved in responding to osmotic stress. In both the iron-metabolism and quorum-sensing circuits discussed above, the input signals, iron limitation and cell density, are coupled to the expression of sRNAs and not to the target mRNAs (Lenz *et al*, 2004; Masse *et al*, 2007), suggesting that filtering input noise may also be an important

consideration (see Fig. 4).

We have considered the case where a single sRNA species regulates a single mRNA species. However, as in the *Vibrio* quorum-sensing circuit, multiple sRNAs may regulate multiple mRNAs (Lenz *et al.*, 2004; Mitarai *et al.*, 2007; Repoila *et al.*, 2003). Even in such a case, mean steady-state protein numbers are expected to exhibit a threshold-linear behavior with three distinct regimes. The main difference from the single sRNA/mRNA case is that the threshold occurs when the combined sRNA transcription rate exceeds the target mRNA transcription rate (Levine *et al.*, 2007; Shimoni *et al.*, 2007). This may allow sRNAs to prioritize usage of different target mRNAs (Levine *et al.*, 2007; Mitarai *et al.*, 2007).

There are additional considerations that may favor sRNA-based or TF-based regulation. For example, TFs are likely to be better global regulators than sRNAs – since sRNAs degrade mRNAs stoichiometrically, only a limited number of genes can be regulated by a given sRNA. Also, the cost in space on the genome is generally larger for sRNA-based regulation than for direct regulation by TFs because in the former it is necessary to encode for the sRNA in addition to the regulatory region of the regulatory TF coupling the sRNA to external signals (see Fig. 3) (Semsey *et al.*, 2006). Additionally, sRNAs and TFs are likely to respond differently to extrinsic noise. For example, one expects sRNA-based regulation to be less sensitive to global RNA-polymerase fluctuations than TFs since sRNAs and their target mRNAs are affected identically by polymerase abundance (Paulsson and Ehrenberg, 2001). Finally, the metabolic costs of sRNA-based regulation and protein-based regulation may differ (Mitarai *et al.*, 2007).

In this paper, we have considered gene regulation by non-coding RNAs in prokaryotes. Regulatory RNAs are also found in eukaryotes. In eukaryotes, these regulatory RNAs are believed to act catalytically, not stoichiometrically. Nonetheless, our analysis suggests that, even in eukaryotes, regulatory RNAs are better at keeping protein expression off than TFs, since in both cases, regulatory RNAs shorten the effective lifetime of their target mRNAs, thus reducing protein fluctuations. Furthermore, our analysis also suggests that regulatory RNAs in eukaryotes are likely better than TFs at filtering out high-frequency input noise in upstream signals.

Recently, it has been shown that noise in protein expression may exhibit a universal behavior (Bar-Even *et al.*, 2006). However, our analysis for the intrinsic noise of an sRNA-regulated protein differs significantly from the proposed universal behavior in the presence of transcriptional bursting (see also (Tkacik *et al.*, 2006)). It would be interesting to test our predictions for intrinsic noise experimentally by quantifying intrinsic cell-to-cell variation of a fluorescent protein (Elowitz *et al.*, 2002) alternatively regulated by an sRNA or a TF, particularly with controllable transcriptional bursting (Blake *et al.*, 2006).

The analogy between biochemical circuits and signal-processing systems in engineering provides a general framework for characterizing the signal-transduction pathways found in biology (Detwiler *et al.*, 2000). Different biological tasks place different requirements on signal-transduction circuits. For example, in

chemotaxis, bacteria must respond quickly to changing input signals (Bialek and Setayeshgar, 2005; Berg, 2003; Keymer, 2006) whereas in quorum sensing or stress response, reliability may be more crucial than speed. One suspects that biological networks exhibit a harmony between network architecture and network function. For this reason, understanding the comparative advantages and disadvantages of different architectures is likely to yield new insights into biological function, as well as new schemes for synthetic circuits.

Materials and Methods

The analyses were carried out using rate-equation models extended to include stochastic fluctuations and our results were tested using Monte-Carlo (Gillespie) simulations. The equations account for the concentration of each component in the circuit, and for noise around the means of these components. The dynamics of gene regulation was modeled using Langevin equations for the various species in the system: mRNAs, sRNAs, and proteins. Using this model, we analyzed the signaling properties of the two regulation schemes, focusing on gain, filtering, and switching times in response to large input signals. For further details see the Supplementary Information.

Acknowledgments

We would like to thank Bonnie Bassler, Matthias Kaschube Anirvan Sengupta, Gasper Tkacik, Chris Waters and Kerwyn C. Huang for helpful discussions and suggestions on the manuscript. This work was partially supported by US National Institutes of Health (NIH) Grant PSO GM071508, the Defense Advanced Research Projects Agency (DARPA) under grant HR0011-05-1-0057, and the Burroughs Wellcome Fund Graduate Training Program.

References

- [1] Bar-Even A, Paulsson J, Maheshri N, Carmi M, O'Shea E, Pilpel Y, Barkai N (2006) Noise in protein expression scales with natural protein abundance. *Nat Genet* **38**: 636-43
- [2] Berg HC (2003) *E. coli in Motion* . Springer-Verlag, New York, USA
- [3] Bialek W and Setayeshgar S (2005) Physical limits to biochemical signaling. *Proc Natl Acad Sci USA* **102**: 10040-5
- [4] Blake WJ, Balazsi G, Kohanski MA, Isaacs FJ, Murphy KF, Kuang Y, Cantor CR, Walt DR, Collins JJ (2006) Phenotypic consequences of promoter-mediated transcriptional noise *Mol Cell* **24**: 853-865

- [5] Detwiler PB, Ramanathan S, Sengupta A, Shraiman BI (2000) Engineering aspects of enzymatic signal transduction: photoreceptors in the retina. *Biophys J* **79**: 2801-17
- [6] Elf, J, Paulsson, J, Berg, OG, Ehrenberg, M (2005) Mesoscopic kinetics and its applications in protein synthesis. In *Topics in Current Genetics: Systems Biology: Definitions and Perspectives*, Alberghina, L, Westerhoff HV (eds) pp 95-116. Springer-Verlag, Berlin, Germany
- [7] Elf J, Paulsson J, Berg OG, Ehrenberg M (2003) Near-critical phenomena in intracellular metabolite pools. *Biophys J*. **84**: 154-70
- [8] Elf J, Ehrenberg M (2003) Fast evaluation of fluctuations in biochemical networks with the linear noise approximation *Genome Research* **13**: 2475-84
- [9] Elowitz MB, Levine AJ, Siggia ED, Swain PS (2002) Stochastic gene expression in a single cell. *Science* **297**: 1183-6
- [10] Fuqua C, Parsek MR, Greenberg EP (2001) Regulation of gene expression by cell-to-cell communication: acyl-homoserine lactone quorum sensing. *Annu Rev Genet* **35**: 439-468
- [11] Golding I, Paulsson J, Zawilski SM, Cox EC (2005) Real-time kinetics of gene activity in individual bacteria. *Cell* **123**: 1025-36
- [12] Gottesman S (2004) The small RNA regulators of Escherichia coli: roles and mechanisms. *Annu Rev Microbiol* **58**: 303-328
- [13] Gottesman S, McCullen CA, Guillier M, Vanderpool CK, Majdalani N, Benhammou J, Thompson KM, Fitzgerald PC, Sowa NA, Fitzgerald DJ (2006) Small RNA regulators and the bacterial response to stress *Cold Spring Harb Symp Quant Biol* **71**: 1-11
- [14] Guillier M, Gottesman S, Storz G (2006) Modulating the outer membrane with small RNAs. *Genes Dev* **20**: 2338-48
- [15] Hammer, BK, Bassler BL (2007) Regulatory small RNAs circumvent the conventional quorum sensing pathway in pandemic *Vibrio cholerae*. *Proc Natl Acad Sci USA* **104**: 11145-9
- [16] Lenz DH, Mok KC, Lilley BN, Kulkarni RV, Wingreen NS, Bassler BL (2004) The small RNA chaperone Hfq and multiple small RNAs control quorum sensing in *Vibrio harveyi* and *Vibrio cholerae*. *Cell* **118**: 69-82
- [17] Levine E, Kuhlman T, Zhang Z, Hwa T (2007) Quantitative characteristics of gene regulation by small RNA. *PLOS Biology* **9**: 229
- [18] Majdalani N, Vanderpool CK, Gottesman S (2005) Bacterial small RNA regulators. *Crit Rev Biochem Mol Biol* **40**: 93-113

- [19] Masse E, Gottesman S (2002) A small RNA regulates the expression of genes involved in iron metabolism in *Escherichia coli*. *Proc Natl Acad Sci USA* **99**: 4620-5
- [20] Masse E, Salvail H, Desnoyers G, Arguin M (2007) Small RNAs controlling iron metabolism. *Curr Opin Microbiol***10**:140-5
- [21] McNeil KJ, Walls DF (1974) *J Stat Phys* **10(6)**: 439-48
- [22] Mitarai N, Andersson MC, Krishna S, Semsey S, Sneppen K. Efficient degradation and expression prioritization with small RNAs. *Phys. Biol.* **4** 164-171.
- [23] Paulsson J, Ehrenberg M (2001) Noise in a minimal regulatory network: plasmid copy number control. *Q Rev Biophys* **34(1)**: 1-59
- [24] Paulsson J (2004) Summing up the noise in gene networks. *Nature* **427**: 415-8.
- [25] Paulsson J (2005) Models of Stochastic Gene Expression. *Phys. Life Rev* **2**: 157-75
- [26] Ptashne M, Gann A (2001) *Genes and Signals*. Cold Spring Harbor Laboratory Press
- [27] Repoila F, Majdalani N, Gottesman S (2003) Small non-coding RNAs, coordinators of adaptation processes in *Escherichia coli*: the RpoS paradigm. *Mol Microbiol* **48**: 855-61.
- [28] Semsey S, Andersson AMC, Krishna S, Jensen MH, Masse E, Sneppen K (2006) Genetic regulation of fluxes: iron homeostasis of *Escherichia coli*. *Nucleic Acids Res* **34**: 4960-7
- [29] Shimoni Y, Friedlander G, Hetzroni G, Niv G, Altuvia S, Biham O, Margalit H (2007) Regulation of gene expression by small non-coding RNAs: a quantitative view. *Mol Syst Biol* **3**: 138
- [30] Storz G, Opdyke JA, Zhang A (2004) Controlling mRNA stability and translation with small, noncoding RNAs. *Curr Opin Microbiol* **7**: 140-144
- [31] Storz G, Altuvia S, Wassarman N (2005) An abundance of RNA regulators. *Annu Rev Biochem* **74**: 199-217
- [32] Swain PS, Elowitz MB, Siggia ED (2002) Intrinsic and extrinsic contributions to stochasticity in gene expression. *Proc Natl Acad Sci USA* **99**: 12795-800
- [33] Thattai M, van Oudenaarden A (2001) Stochastic gene expression in fluctuating environments. *Proc Natl Acad Sci USA* **98**: 8614-9

- [34] Tkacik G, Gregor T, Bialek W (2007) The role of input noise in transcriptional regulation. *arXiv:q-bio/0701002*
- [35] van Kampen NG (1981) *Stochastic Processes in Physics and Chemistry*. North-Holland, Amsterdam
- [36] Vogel J, Pappenfort K (2006) Small non-coding RNAs and the bacterial outer membrane. *Curr Opin Microbiol* **9**: 605-11
- [37] Keymer JE, Andres RG, Skoge M, Meir Y, Wingreen NS (2006) Chemosensing in Escherichia coli: two regimes of two-state receptors. *Proc Natl Acad Sci U S A* **103**: 1786-91
- [38] Zhu J, Miller MB, Vance RE, Dziejman M, Bassler BL, Mekalanos JJ (2002) Quorum-sensing regulators control virulence gene expression in Vibrio cholerae. *Proc Natl Acad Sci USA* **99**: 31293134

Figure legends

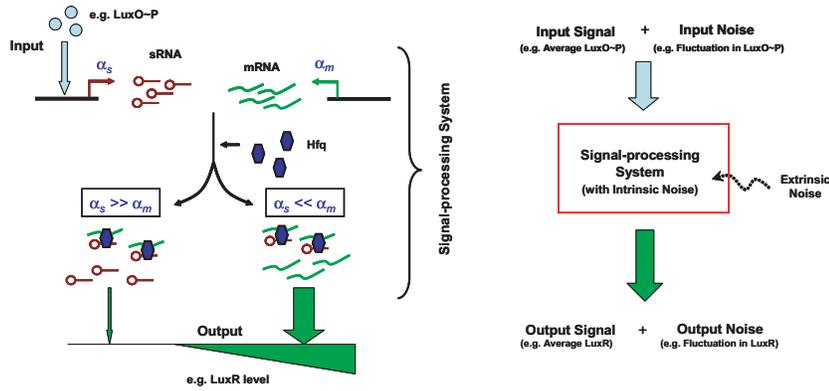


Figure 1: Genetic Regulation via sRNAs. Left: Small non-coding RNAs (sRNAs) regulate protein expression as part of a larger genetic network with a specific biological task (e.g. quorum sensing in *Vibrio* bacteria (Lenz *et al*, 2004)). The sRNAs (stem loops) regulate target proteins by destabilizing target-protein mRNAs (wavy lines), a stoichiometric process mediated by the RNA chaperone Hfq (hexagons). When the rate of sRNA transcription α_s greatly exceeds the rate of mRNA transcription α_m , i.e. when $\alpha_s \gg \alpha_m$, nearly all the mRNAs are bound by sRNAs and cannot be translated. By contrast, when $\alpha_m \gg \alpha_s$, there are many more mRNAs than sRNAs, and protein is highly produced. Right: The stochasticity (randomness) of cellular processes results in noise – statistical fluctuations in the molecular numbers. It is helpful to classify the total noise in the output (*output noise*) into (i) *input noise* – noise in the input signal from upstream-components in the gene circuit, (ii) *intrinsic noise* – noise from stochasticity inherent in gene regulation via sRNAs, and (iii) *extrinsic noise* – all other sources of noise impinging on the signal-processing system.

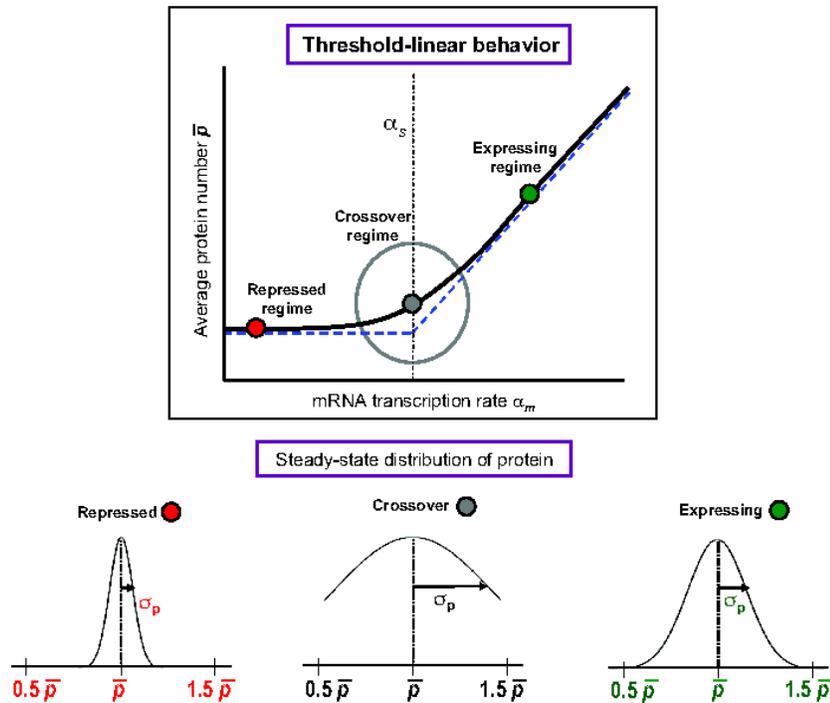


Figure 2: Steady-state behavior for gene regulation via sRNAs. For the regulated protein, the steady-state mean number \bar{p} exhibits an approximately threshold-linear behavior as a function of the mRNA transcription rate α_m . The threshold is set by the sRNA transcription rate α_s . Protein expression can be classified into three regimes: repressed ($\alpha_s \gg \alpha_m$), crossover ($\alpha_s \approx \alpha_m$), and expressing ($\alpha_s \ll \alpha_m$). In the repressed regime, the average protein number is low. By contrast, the protein number increases almost linearly with α_m in the expressing regime. The typical behavior of the noise σ_p , the standard deviation of the protein number, is shown for the three regimes.

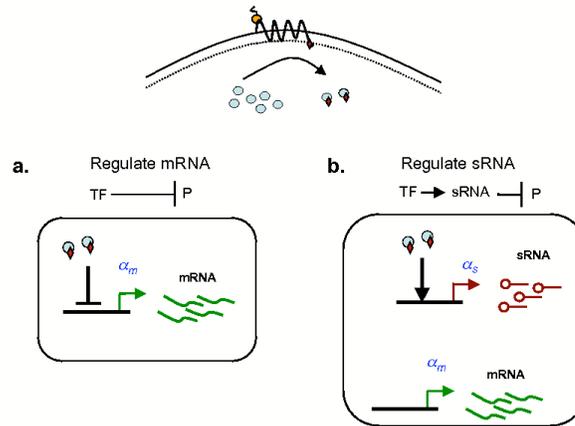


Figure 3: Schematic showing our comparison of transcriptional and post-transcriptional, sRNA-mediated regulation. We take as the input signal to both systems a protein regulator (blue discs) that either directly transcriptionally regulates the relevant gene by acting as a repressor or transcriptionally regulates an sRNA acting as an activator. The protein regulator is chosen to have identical kinetic properties in both cases.

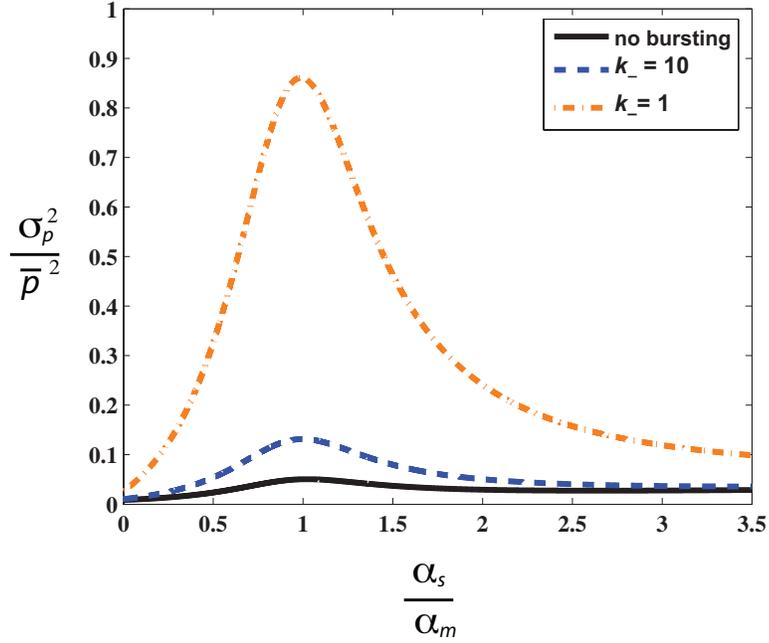


Figure 4: Protein noise with or without transcriptional bursting. Noise in protein expression σ_p^2 / \bar{p}^2 (variance divided by mean squared) as a function of the ratio of the sRNA and mRNA transcription rates, α_s / α_m , for different levels of transcriptional bursting. We have assumed that both the sRNAs and mRNAs are produced in bursts. The noise peaks in the crossover regime, $\alpha_s \approx \alpha_m$. A slower unbinding rate k_- for the repressor proteins controlling sRNA and mRNA expression results in larger transcriptional bursts. Parameters are (in min^{-1}): $\alpha_m = 3$, $\alpha_m^{\text{on}} = 10$, $\alpha_s^{\text{on}} = 30$, $\tau_m = 10$, $\tau_s = 30$, $\mu = 0.02$, $\alpha_p = 4$, $\tau_p = 30$, and k_+ is adjusted to set the mean protein levels (for a discussion of parameter dependence see Supplementary Information).

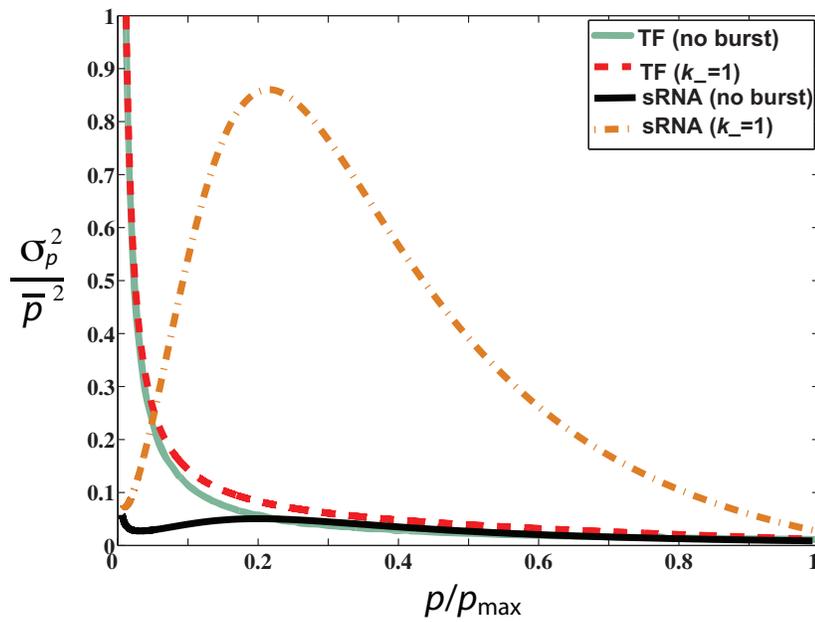


Figure 5: Comparison of analytic expressions for the intrinsic protein noise for TF-based and sRNA-based regulation. Shown is the intrinsic noise for sRNA-based regulation as a function of normalized average protein concentration, \bar{p}/p_{\max} , with and without transcriptional bursting. All parameters as in Fig. 4.

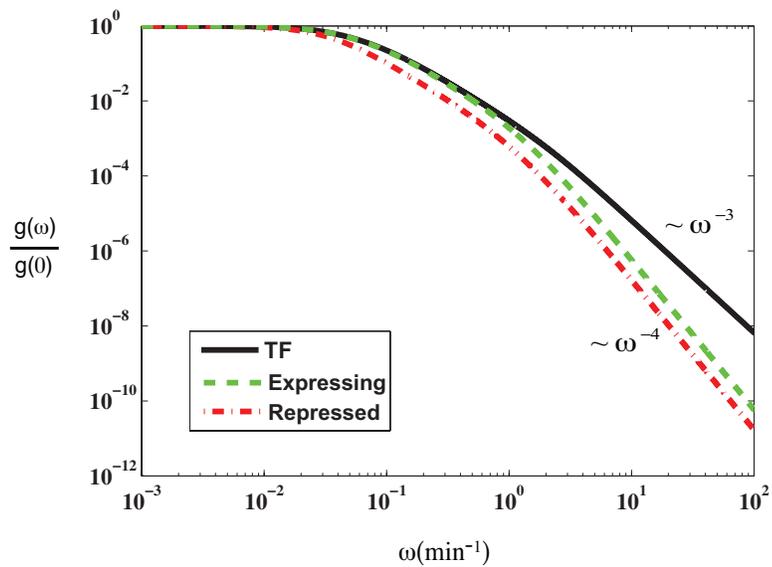


Figure 6: Normalized frequency-dependent gain, $g(\omega)/g(0)$, as a function of the frequency, ω , for a small input signal for TF-based regulation and for sRNA-based regulation in the repressed and expressing regimes. The amplitude of the frequency-dependent gain decreases rapidly $\propto \omega^{-4}$ at high frequencies for sRNAs compared to $\propto \omega^{-3}$ for TFs. Consequently, sRNA-based regulation is less sensitive to high-frequency input noise than is TF-based regulation. Parameters as in Fig. 4.

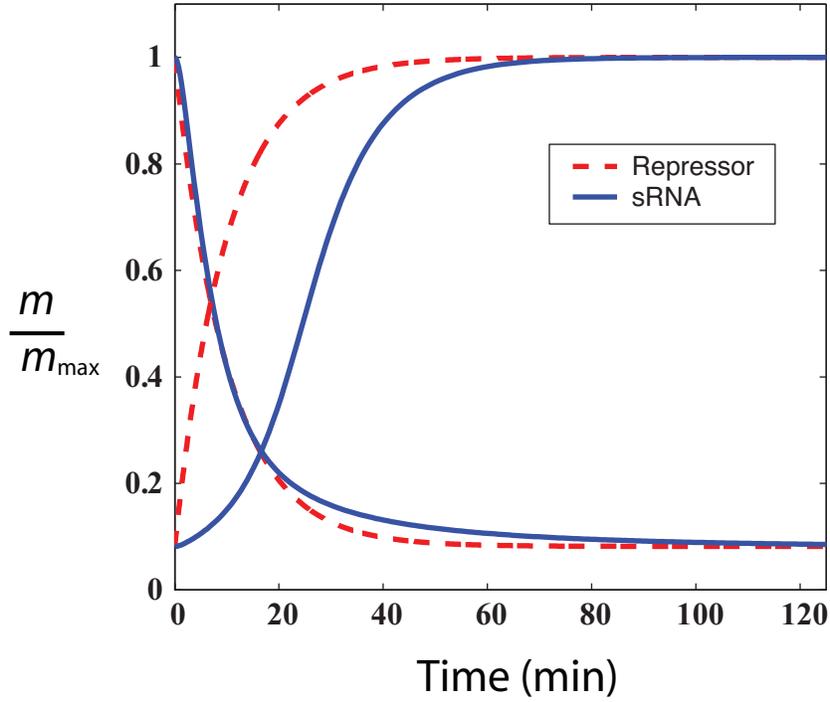


Figure 7: Large-signal switching. Normalized mRNA level m/m_{\max} , as a function of time, in response to step changes in the input, for both the sRNA-based and the TF-based regulation. Switching from high mRNA level (on state) to low mRNA level (off state) and vice versa. Switching from off to on state has a lag in the case of sRNA-based regulation, whereas the switching time from the on to off state for sRNAs is faster or comparable to that for TFs, depending on the choice of kinetic parameters. For sRNA-based regulation, $\alpha_m = 3.5$ and α_s goes from ≈ 0.35 to 4.5 for switching from low to high and vice versa for high to low. For TF-based switching α_m is such that both schemes have same steady states. Other parameters as in Fig. 4.

Tables

Summary comparison of signaling properties of sRNAs and protein regulators

Advantages of sRNAs	Advantages of protein regulators
<ul style="list-style-type: none">• sRNAs are better than protein regulators at keeping proteins "off" because a large pool of sRNAs shortens the effective mRNA lifetime and buffers against target mRNA fluctuations.• sRNAs can filter high-frequency noise without compromising the ability to rapidly respond to large changes in input signals <p>⇒ sRNAs likely fill a "niche" in allowing cells to transition quickly yet reliably between distinct states.</p>	<ul style="list-style-type: none">• The intrinsic noise for sRNA-based regulation is much larger than that for transcriptional regulation in a large (intermediate to high) range of expression levels of the regulated protein, especially in the presence of transcriptional bursting.• Protein regulators are better than sRNAs at transducing small input signals. <p>⇒ Protein regulators are likely better suited for quantitative adjustment of protein expression than sRNAs.</p>

Table 1: Table summarizing the advantages and disadvantages of sRNAs when compared to transcriptional protein regulators (transcription factors).