

FIG. 2: The DOS in the Hydrogen case ($\mathbf{V}_0 = 13, 6\text{eV}$, $L_0 = 2\text{\AA}$ and $\kappa = 1.526$)

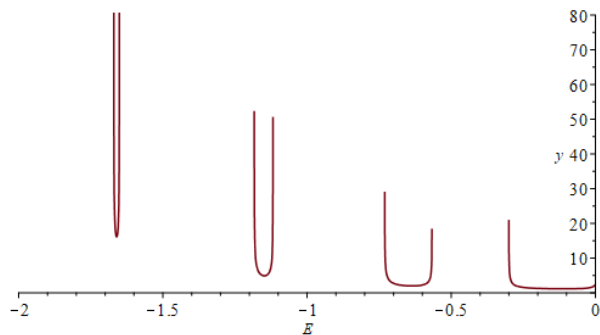


FIG. 3: The DOS in the Carbon case ($\mathbf{V}_0 = 489.99\text{eV}$, $L_0 = 3.08\text{\AA}$ and $\kappa = 10.682$)

of domain $D(H_{2N+1}) = \{\psi \in H^2(\mathbb{R}), \psi(-(2N+1)L_0) = \psi((2N+1)L_0)\}$ is a pure point spectrum. By convention, we call “level of energies of \mathbf{V}_{2N+1} ” the eigenvalues of H_{2N+1} and “spectral bands or gaps of \mathbf{V} ” the spectral bands and spectral gaps of H .

It is proven in [3] that there is no level of energy of \mathbf{V}_{2N+1} in the spectral gaps of \mathbf{V} and there are exactly $2N+2$ level of energies of \mathbf{V}_{2N+1} in each spectral band of \mathbf{V} .

A normalized counting function of the eigenvalues of H_{2N+1} reads

$$I_N(E) = \frac{1}{2L_0(2N+1)} \#\{\lambda \leq E, \lambda \in \sigma(H_{2N+1})\}.$$

The **Integrated Density of States** (IDS for short) is the limit of $I_N(E)$ as $N \rightarrow +\infty$. Note that in the normalization factor $2L_0(2N+1)$, $2N+1$ is the number of atoms in the finite lattice.

The IDS is a natural object defined through Birkhoff’s ergodic theorem and it is easier to compute and study than its derivative which is defined as the mathematical DOS, whenever possible.

Introduce $\mathbf{U}(x) = \pi(Bi'(-x - \kappa \frac{E}{\mathbf{V}_0})Ai(x) - Ai'(-x - \kappa \frac{E}{\mathbf{V}_0})Bi(x))$ and $\mathbf{V}(x) = \pi(Ai(-x - \kappa \frac{E}{\mathbf{V}_0})Bi(x) - Bi(-x -$

$\kappa \frac{E}{\mathbf{V}_0})Ai(x))$, as well as the function Φ , defined on $\sigma(H)$ through

$$\Phi(E) = 2 \arctan \sqrt{-\frac{\mathbf{U}\mathbf{V}}{\mathbf{U}\mathbf{V}'}} \left(-\frac{\kappa E}{\mathbf{V}_0} \right),$$

were, incidentally, we notice that

$$\sigma(H) = \{E, (\mathbf{U}\mathbf{U}'\mathbf{V}\mathbf{V}') \left(\frac{\kappa E}{\mathbf{V}_0} \right) \leq 0\},$$

the edges of the bands E_{min}^i, E_{max}^i being the roots of $\mathbf{U}\mathbf{U}'\mathbf{V}\mathbf{V}'$. The derivative of the IDS given by (3) yields, for all real numbers E and all $\kappa \geq \kappa_0$:

$$\text{DOS}(E) = (-1)^{p(\frac{\kappa E}{\mathbf{V}_0})} \frac{1}{2\pi} \frac{\kappa}{\mathbf{V}_0} \Phi' \left(\frac{\kappa E}{\mathbf{V}_0} \right) 1_{[E_{min}^{p(\frac{\kappa E}{\mathbf{V}_0})}, E_{max}^{p(\frac{\kappa E}{\mathbf{V}_0})}]} \quad (1)$$

where $p(\frac{\kappa E}{\mathbf{V}_0}) = \lceil \frac{4}{3\pi} \kappa^{\frac{3}{2}} (1 + \frac{E}{\mathbf{V}_0})^{\frac{3}{2}} \rceil$. Note that $p(\frac{\kappa E}{\mathbf{V}_0}) = 1$ corresponds to the conduction band.

Recall that for generic Schrödinger operators with periodic potentials, the density of states behave, at the bottom of the spectrum, as $C(E - E_{min}^0)^{-\frac{1}{2}}$ with $C > 0$ a constant. In general nothing is known about the other bands. For a mathematical proof, see [9, Theorem 2.1] where the assumption of non-degeneracy of the spectral edges needed to apply [10, Proposition 1.1] is proven. See also [4] for the non-degeneracy of the bottom of the continuous spectrum in the dimension 1 case. Our potential \mathbf{V} yields an example of periodic Schrödinger operator for which the IDS behaves as $K(E_b)|E - E_b|^{\frac{1}{2}}$ at all edges E_b of the spectral bands (see (4)). By derivation of our explicit expression (3), we recover that the DOS has asymptotics $|E - E_b|^{-\frac{1}{2}}$ at the edges of all spectral bands.

From the expression (1) or from the Figure 5, one notice that when N gets large, the eigenvalues of H_{2N+1} accumulate in the spectral bands. They accumulate more at the edges of the bands than in the middle of the bands. One also notice that the bands gets thinner when they approach the bottom of the spectrum and also when κ , our dimensionless parameter, gets larger.

The formula (1) allows us to add a simple model, analytically tractable, which does not need numerical computations, (apart from plotting a classical function deduced from the Airy functions), in the list of 1d models one could hope to compare to the experimental data.

B. Adding a random perturbation

Another related situation worth mentioning is the behavior of the IDS in the presence of a random perturbation. In this case, the behavior of the IDS changes drastically compared to the deterministic periodic case. In 1963, Lifshitz had conjectured that, for a continuous random Schrödinger operator acting on $L^2(\mathbb{R})$, there exist $c_1, c_2 > 0$ such that its IDS satisfies the asymptotic $c_1 \exp(-c_2(E - E_0)^{-\frac{1}{2}})$ as E tends to E_0 , where E_0 is the

bottom of the spectrum of the considered Schrödinger operator (see [14]). This asymptotic behavior is known as Lifshitz tails and the exponent $-1/2$ is called the Lifshitz exponent of the operator.

Note that the IDS itself is defined through a thermodynamical limit which existence is proven through Birkhoff's ergodic theorem. Hence the IDS is almost-surely a deterministic quantity and it is not surprising that its asymptotic behavior at the bottom of the spectrum does not depend on the random parameters defining the random model.

The Lifshitz tails behavior has been proven first for the Poisson model (see [6]) then for the Anderson model (see [10] for a general result about internal Lifshitz tails) and for the random displacement model (see [11]). The Lifshitz tails behavior means that the spectrum is very "thin" near E_0 and is a clue of the presence of the phenomenon of Anderson localization [1]. Actually, the random models for which the Lifshitz tails behavior has been rigorously proven present Anderson localization in the sense that the almost-sure spectrum of these models is pure point and all eigenfunctions associated to eigenvalues in this pure point spectrum are exponentially decaying at infinity. And indeed, a pure point spectrum corresponds to the idea of a "thin" spectrum, by comparison to an absolutely continuous spectrum which contains full intervals as in the periodic case.

The random case is, from a mathematical point of view, better understood in the framework of the IDS than in the one of the DOS. If there is a vast literature about the IDS for random Schrödinger operators, very few is known for the DOS of the same models.

III. SKETCH OF THE PROOF

The operator H is a self-adjoint operator, of non compact resolvent (because the potential is not compactly supported). Hence it has no pure point spectrum (see [2] where the results of Reed-Simon are recalled), and the absolutely continuous spectrum is composed of bands. Recall first that it has been proven in [2] that the bands of H (segments of the purely absolutely continuous spectrum) are the $[E_{min}^i, E_{max}^i]$, where $E_{min}^{2i}, E_{max}^{2i+1} \dots$ are the eigenvalues of $-\frac{\hbar^2}{2m} \frac{d^2}{dx^2} + \mathbf{V}(x)$ on $H^1([-L_0, L_0])$ supplemented with the boundary conditions $\psi(L_0) = \psi(-L_0)$ and $\psi'(L_0) = \psi'(-L_0)$ and $E_{max}^{2i}, E_{min}^{2i+1} \dots$, are the eigenvalues of $-\frac{\hbar^2}{2m} \frac{d^2}{dx^2} + \mathbf{V}(x)$ on $H^1([-L_0, L_0])$ supplemented with the boundary conditions $\psi(L_0) = -\psi(-L_0)$ and $\psi'(L_0) = -\psi'(-L_0)$.

The proofs are based upon the construction of a solution Ψ_E of the eigenvalues equation $H\Psi_E = E\Psi_E$ using transmission conditions between each period. We use there the uniqueness (up to a constant) of the solution outside the symmetric domain $[-(2N+1)L_0, (2N+1)L_0]$ and connect this solution to the inside of it.

Introduce the pair (U, V) of fundamental solutions of the Airy equation. The functions $U(\lambda(\mathbf{V}(x) - E))$ and

$\text{sign}(\mathbf{V}(x) - E - [\mathbf{V}(x) - E])V(\lambda(\mathbf{V}(x) - E))$ are solution of H outside the points nL_0 , and construct a Bloch mode of H if and only if an equality on E using U, V, U', V' is fulfilled (with four different equalities, see [2] for details). Extremely precise study of the behavior of the solutions of the Airy equations allow us to see the edges of the bands as all these ordered (interlaced) solutions of these equations.

It is then easy to define all eigenfunctions of H_{2N+1} as being equal to $A_n U(\mathbf{V}_{2N+1}(x)) + B_n V(\mathbf{V}_{2N+1}(x))$ for all $x \in [(2n-1)L_0, (2n+1)L_0]$. The regularity of the eigenfunction implies transfer conditions on $\begin{pmatrix} A_n \\ B_n \end{pmatrix}$, of the form $\begin{pmatrix} A_{n+1} \\ B_{n+1} \end{pmatrix} = T_{\frac{\kappa E}{\mathbf{V}_0}} \begin{pmatrix} A_n \\ B_n \end{pmatrix}$, supplemented with the conditions expressing the fact that the eigenfunction is a solution of the ODE $-\frac{\hbar^2}{2m} \frac{d^2}{dx^2} \psi = E\psi$ decaying at $\pm\infty$ outside the interval $[-(2N+1)L_0, (2N+1)L_0]$.

$$\begin{pmatrix} A_{-N} \\ B_{-N} \end{pmatrix} \propto \begin{pmatrix} 1 \\ -\kappa^{\frac{3}{2}} \sqrt{\frac{1}{-\mathbf{V}_0}} \end{pmatrix}, \begin{pmatrix} A_N \\ B_N \end{pmatrix} \propto \begin{pmatrix} 1 \\ \kappa^{\frac{3}{2}} \sqrt{\frac{1}{-\mathbf{V}_0}} \end{pmatrix}.$$

The eigenvalues E are thus solutions of

$$T^{2N} \begin{pmatrix} 1 \\ \kappa^{\frac{3}{2}} \sqrt{\frac{1}{-\mathbf{V}_0}} \end{pmatrix} \cdot \begin{pmatrix} \kappa^{\frac{3}{2}} \sqrt{\frac{1}{-\mathbf{V}_0}} \\ 1 \end{pmatrix} = 0. \quad (2)$$

This equation is explicitly written using again U, V, U', V' . These expressions allow us to study precisely the roots of the equation (2). The distribution of these roots then yields the IDS (the complete description of this method is done in [3]).

IV. APPENDIX: MATHEMATICAL CALCULATIONS

We are able to describe the DOS and the IDS in the conduction band and in the valence band. The potential that we are able to treat is \mathbf{V} , the $2L_0$ periodic function which restriction to $[-L_0, L_0]$ is $-\mathbf{V}_0 + \frac{\mathbf{V}_0}{L_0}|x|$.

For E a real number, $\text{IDS}(E)$ is given by

$$\frac{1}{2} p\left(\frac{\kappa E}{\mathbf{V}_0}\right) + \begin{cases} \frac{1}{2\pi} \Phi\left(\frac{\kappa E}{\mathbf{V}_0}\right) 1_{[E_{min}^{p(\frac{\kappa E}{\mathbf{V}_0)}}, E_{max}^{p(\frac{\kappa E}{\mathbf{V}_0)}]}], & p\left(\frac{\kappa E}{\mathbf{V}_0}\right) \text{ even} \\ \left(\frac{1}{2} - \frac{1}{2\pi} \Phi\left(\frac{\kappa E}{\mathbf{V}_0}\right)\right) 1_{[E_{min}^{p(\frac{\kappa E}{\mathbf{V}_0)}}, E_{max}^{p(\frac{\kappa E}{\mathbf{V}_0)}]}], & p\left(\frac{\kappa E}{\mathbf{V}_0}\right) \text{ odd} \end{cases}, \quad (3)$$

where $p\left(\frac{\kappa E}{\mathbf{V}_0}\right) = \left[\frac{4}{3\pi} \kappa^{\frac{3}{2}} \left(1 + \frac{E}{\mathbf{V}_0}\right)^{\frac{3}{2}}\right]$ for $\kappa \geq \kappa_0$.

Here, $-\kappa_0$ is the largest zero of V introduced above ($\kappa_0 \simeq 1.515$). This is proven in [3]. The presence of the integer multiple of $\frac{1}{2} = \frac{\pi}{2\pi}$ is also a consequence of the gap-labelling theorem (see [8]). For a simple explanation, see [5, Page 390].

In the case E not close to zero, one proves that ($i \leq p$)

$$\frac{\text{IDS}(E)}{\sqrt{E - E_{min}^i}} = K_{min}^i(E), \quad \frac{\text{IDS}(E)}{\sqrt{E_{max}^i - E}} = K_{max}^i(E) \quad (4)$$

where the functions $K_{min}^i(E), K_{max}^i(E)$ are smooth, respectively, in the neighborhood of E_{min}^i, E_{max}^i . One has

respectively in the neighborhood of E_{min}^i, E_{max}^i , the existence of functions R_{min}^i, R_{max}^i smooth such that

$$\begin{aligned} \text{DOS}(E) &= (E - E_{min}^i)^{-\frac{1}{2}} R_{min}^i(E), \\ \text{DOS}(E) &= (E_{max}^i - E)^{-\frac{1}{2}} R_{max}^i(E). \end{aligned}$$

We also obtain the following exact expression equivalent to (3), where $\tau_0 = \frac{A_i}{B_i}(-\frac{cE}{V_0}), \tau_1 = \frac{A_i'}{B_i'}(-\frac{cE}{V_0}), P$ and Q are functions defined through the fractional Bessel functions (see [2, 13]), $\zeta = \frac{2}{3}(\kappa + E)^{\frac{3}{2}}$, and a, b, c, d are constructed with $P, Q, \cos \zeta, \sin \zeta$

$$\Phi(E) = \sqrt{\frac{a + \tau_0 b - \tau_1 c - \tau_0 \tau_1 d}{a + \tau_0 c - \tau_1 b - \tau_0 \tau_1 d}} \simeq \sqrt{\frac{\tau_0 - \frac{1}{\tau_1} - 2 \cos \zeta}{\tau_1 - \frac{1}{\tau_0} + 2 \cos \zeta}}.$$

The graph for the IDS is given at Figure 4. This is the graph of a function, given by (3). The graph of the DOS is given at Figure 5.

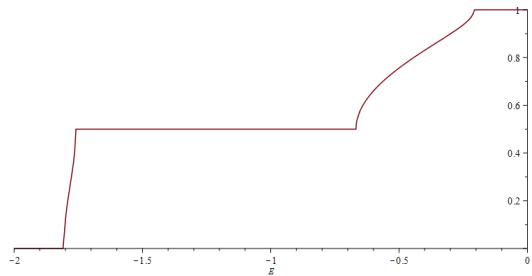


FIG. 4: Integrated density of states for $\kappa = 2.8$

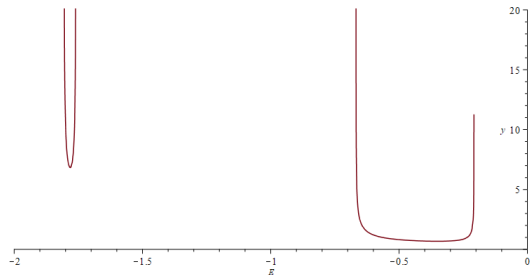


FIG. 5: The DOS associated to the potential V for $\kappa = 2.8$

-
- [1] M. Aizenman, S. Warzel: Random operators. Disorder effects on quantum spectra and dynamics, Vol. 168 (Providence, RI : American Mathematical Society (AMS), 2015)
- [2] H. Boumaza, O. Lafitte: The band spectrum of the periodic Airy-Schrödinger operator on the real line, *J. Differential Equations* 264(1), 455-505 (2018), DOI:10.1016/j.jde.2017.09.013
- [3] H. Boumaza, O. Lafitte: Integrated density of states: from the finite range to the periodic Airy-Schrödinger operator, *J. Math. Phys.* 62, 043503 (2021), <https://doi.org/10.1063/5.0015181>
- [4] H. Boumaza, H. Najjar, Lifshitz tails for continuous matrix-valued Anderson models, *J. Stat. Phys.* 160, No. 2, 371-396 (2015).
- [5] R. Carmona and J. Lacroix: Spectral Theory of Random Schrödinger Operators, *Probability and Its Applications, Birkhäuser, Boston, (1990)*
- [6] M. Donsker, S. Varadhan: Asymptotic for the Wiener sausage, *Commun. Pure Appl. Math.* 28, 525-565 (1975).
- [7] E. Jeckelmann: Local density of states of the one-dimensional spinless fermion model *J. Phys.: Condens. Matter* 25 (2013) 014002
- [8] R. A. Johnson: Exponential dichotomy, rotation number, and linear differential operators with bounded coefficients. *J. Differential Equations*, 61(1):54-78, (1986).
- [9] W. Kirsch, B. Simon: Comparison theorems for the gap of Schrödinger operators, *J. Funct. Anal.* 75(2), 396-410 (1987).
- [10] F. Klopp : Internal Lifshitz tails for random perturbations of periodic Schrödinger operators, *Duke Math. J.* 98(2), 335-396 (1999).
- [11] F. Klopp, M. Loss, S. Nakamura, G. Stolz: Localization for the random displacement model, *Duke Math. J.* 161, No. 4, 587-621 (2012).
- [12] Krasavin et al: Restoration of valence density of states from XPS spectra *IOP Conf. Series: Journal of Physics: Conf. Series* 1923364(526071879)012014
- [13] F. W. J. Olver, Asymptotics and special functions, Computer Science and Scientific Computing, Academic Press, San Diego, (1974).
- [14] I. Lifshitz: Structure of the energy spectrum of impurity bands in disordered solid solutions, *Soviet Phys. JETP* 17, 1159-1170 (1963)
- [15] Masoud Seifkar et al: Self-consistent Green's function method for dilute nitride conduction band structure 2014 *J. Phys.: Condens. Matter* 26 365502