

Efficient Reachable Sets on Lie Groups Using Lie Algebra Monotonicity and Tangent Intervals

Akash Harapanahalli and Samuel Coogan

Abstract—In this paper, we efficiently compute overapproximated reachable sets for control systems evolving on Lie groups, building off results from monotone systems theory and geometric integration theory. We propose to consider intervals living in the Lie algebra, which through the exponential map, describe real sets on the Lie group. A local equivalence between the original system and a system evolving on the Lie algebra allows existing interval reachability techniques to apply in the tangent space. Using interval bounds of the Baker–Campbell–Hausdorff formula, a Runge-Kutta-Munthe-Kaas reachability algorithm is proposed, providing reachable set estimates for arbitrary time horizons at little computational cost. The algorithm is demonstrated on through consensus on a torus and attitude control on $SO(3)$.

I. INTRODUCTION

One way to verify the safe behavior of a complex control system is to over-approximate its reachable set, the set of all possible states the system might reach under uncertainties in initial conditions and input. When working with safety-critical systems, computing such reachable sets in a computationally efficient manner can help to verify the satisfaction of goal and safety specifications. There has been a growing body of work in efficiently computing reachable sets for control systems under uncertainty [1], including several tools such as CORA [2] for polytope-based reachability, JuliaReach [3] using Taylor model flowpipes, and DynIBEX [4] for robust Runge-Kutta schemes. However, almost every tool existing in the literature deals with systems evolving on Euclidean state spaces.

Many real mechanical systems evolve on manifolds, which locally resemble vector spaces, but have different global properties. For example, many robotics applications use Lie groups to model rigid body motions [5], the attitude of a spacecraft [6] evolves on $SO(3)$, and the Hamiltonian control system [7] evolves on a symplectic manifold. Manifold state spaces have been studied extensively in the field of Geometric Control [8]—and working directly with manifolds often allows one to better capture the underlying geometric properties of a state space.

Monotone systems theory [9] and mixed monotone systems theory [10] allows the computation of a reachable set at the relatively small cost of simulating only two trajectories of the system. There has been some work in characterizing coordinate-free structures similar to monotonicity on manifolds. Since manifolds are not generally globally orderable, cone fields [11] provide a local notion ordering. Differential

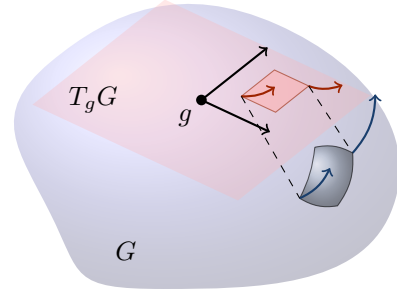


Fig. 1. A pictorial representation of Theorems 4 and 5. An interval in the tangent space $T_g G$, pictured as the red box, is exponentiated to a real set on the manifold, pictured in gray. Two trajectories in the Lie algebra provide an over-approximated reachable set on the Lie group, through exponentiation.

positivity [12], the infinitesimal version of monotonicity, uses these cone fields to study a Perron-Frobenius theory. Differential positivity has been studied in Lie groups [13], and homogeneous spaces [14]. However, these works study purely infinitesimal properties, and do not examine set-valued properties like reachable sets.

There is a wealth of literature in geometric numerical integration techniques in Lie groups and Homogeneous spaces [15], [16] that capture underlying geometric structure, such as the Runge-Kutta-Munthe-Kaas technique [17] and the Magnus expansion [18]. In this paper, we seek to develop a similar geometric method for efficient reachable set computation on Lie groups.

A. Contributions

In this paper, we derive an approach inspired by monotone systems theory and geometric integration theory to efficiently overapproximate reachable sets for control systems evolving on Lie groups. In Proposition 2, we discuss the local equivalence of a control system on a Lie group with a control system evolving on the Lie algebra. Definition 3 introduces the *tangent interval*, which is an interval living in the tangent space to a manifold. Coupled with the exponential map, the tangent interval allows us to study real sets on the Lie group state space. When the equivalent system is monotone, in Theorem 4, for small t , we can compute the reachable set of an exponentiated tangent interval by flowing two trajectories in the Lie algebra. When the equivalent system is not monotone, but the cone in the Lie algebra is simplicial, in Theorem 5, we can similarly compute the reachable set by flowing one trajectory of an embedding system of twice the dimension. Using an inclusion function for the Baker-Campbell-Hausdorff (BCH) formula, Proposition 6

describes how we can “recenter” the tangent interval to extend this reachable set to any desired $T > 0$, culminating in Algorithm 1, which builds on the Runge-Kutta-Munthe-Kaas numerical integration method to compute overapproximating reachable sets of the system. In Proposition 7, we show how this approach simplifies for abelian Lie groups. Finally, in Section V, we demonstrate Algorithm 1 on two case studies: coupled oscillators evolving on a torus, and attitude control on $SO(3)$.

II. NOTATION AND BACKGROUND

A. Interval analysis and (mixed) monotone systems

A (pointed) *cone* is a convex subset $K \subset V$ of a vector space V such that $K + K \subset K$, $\lambda K \subset K$ for every $\lambda \geq 0$, and $K \cap -K = \{0\}$. A pointed cone induces a partial order on V as follows: for $x, y \in V$, $x \leq_K y \iff y - x \in K$. For $x \leq_K y$, denote the K -interval as $[x, y]_K = \{z \in V : x \leq_K z \leq_K y\}$. Let $\mathbb{I}_K V$ be the set of all K -intervals.

Let V and W be n - and m -dim vector spaces with cones K and C inducing partial orders \leq_K and \leq_C . Given a map $f : V \rightarrow W$, the map $F : \mathbb{I}_K V \rightarrow \mathbb{I}_C W$ is called an *inclusion function* for f if

$$f(v) \in F([\underline{v}, \bar{v}]),$$

for every $v \in [\underline{v}, \bar{v}]_K$. K and C are called *simplicial cones* if can be identified with the positive orthants \mathbb{R}_+^n and \mathbb{R}_+^m with the right bases, and in that case, V and W are equivalent to \mathbb{R}^n and \mathbb{R}^m with the standard elementwise ordering \leq . We use $\mathbb{I}\mathbb{R}^n$ to denote the set of \mathbb{R}_+^n -intervals. This case, often called Interval Analysis, has been very well studied in the literature [19] and allows for rapid robust computation of functions under input perturbations, such as floating point inaccuracies and sensor noise.

Consider the nonlinear control system

$$\dot{v} = f(v, u), \quad (1)$$

where $v \in V$ is the state, $u \in \mathcal{U} \subset W$ is the control input in a subset \mathcal{U} of W , and f is a parameterized vector field on V . The system (1) is *monotone* with respect to (\leq_K, \leq_C) if

$$\begin{aligned} v_1 \leq_K v_2 \text{ and } \mathbf{u}_1(t) \leq_C \mathbf{u}_2(t) \text{ a.e.} \\ \implies \phi_t(v_1, \mathbf{u}_1) \leq_K \phi_t(v_2, \mathbf{u}_2), \end{aligned}$$

where ϕ_t denotes the usual flow of (1) to time t [9]. The defining property of a monotone system allows one to overapproximate its reachable set by simulating two extreme trajectories of the system. In particular,

$$\begin{aligned} v_0 \in [\underline{v}_0, \bar{v}_0]_K \text{ and } \mathbf{u}(t) \in [\underline{\mathbf{u}}(t), \bar{\mathbf{u}}(t)]_C \text{ a.e.} \\ \implies v(t) \in [\underline{v}(t), \bar{v}(t)]_K, \end{aligned}$$

where $v(t) = \phi_t(v_0, \mathbf{u})$, $\underline{v}(t) = \phi_t(\underline{v}_0, \underline{\mathbf{u}})$, and $\bar{v}(t) = \phi_t(\bar{v}_0, \bar{\mathbf{u}})$.

Now, consider the case that the dynamics (1) are not monotone. Assume K and C are simplicial cones, so in the right basis, $V = \mathbb{R}^n$, $W = \mathbb{R}^m$, and $f : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}^n$. If

one can find an inclusion function¹ $F : \mathbb{I}\mathbb{R}^n \times \mathbb{I}\mathbb{R}^m \rightarrow \mathbb{I}\mathbb{R}^n$ for f , one can embed the dynamics (1) into a *mixed monotone embedding system* in $2n$ dimensions,

$$\begin{aligned} \dot{\underline{v}}_i &= \underline{F}([\underline{v}, \bar{v}], [\underline{u}, \bar{u}])_i := \underline{F}([\underline{v}, \bar{v}]_{i;\underline{v}}, [\underline{u}, \bar{u}])_i, \\ \dot{\bar{v}}_i &= \bar{F}([\underline{v}, \bar{v}], [\underline{u}, \bar{u}])_i := \bar{F}([\underline{v}, \bar{v}]_{i;\bar{v}}, [\underline{u}, \bar{u}])_i, \end{aligned} \quad (2)$$

for each $i = 1, \dots, n$, where $[\frac{v}{\bar{v}}] \in \mathbb{R}^{2n}$, $\underline{v} \leq \bar{v}$, $[\frac{u}{\bar{u}}] \in \mathbb{R}^{2m}$, $\underline{u} \leq \bar{u}$. The system (2) is a monotone system with respect to the *southeast orders* in \mathbb{R}^{2n} and \mathbb{R}^{2m} , defined as $[\frac{v}{\bar{v}}] \leq_{SE} [\frac{w}{\bar{w}}]$ if and only if $\underline{v} \leq \underline{w}$ and $\bar{w} \leq \bar{v}$. Since the original system is embedded in (2), its monotonicity implies that

$$\begin{aligned} v_0 \in [\underline{v}_0, \bar{v}_0]_K \text{ and } \mathbf{u}(t) \in [\underline{\mathbf{u}}(t), \bar{\mathbf{u}}(t)]_C \text{ a.e.} \\ \implies v(t) \in [\underline{v}(t), \bar{v}(t)]_K, \end{aligned}$$

where $[\frac{v(t)}{\bar{v}(t)}] = \Phi_t([\frac{v_0}{\bar{v}_0}], [\frac{u}{\bar{u}}])$, where Φ_t denotes the flow of (2) [10], [20].

B. Lie groups

Let M be a (smooth) manifold, $T_p M$ denote the tangent space at $p \in M$ and $TM := \bigsqcup_{p \in M} T_p M$ denote the tangent bundle. Given a smooth map $g : M \rightarrow N$ between manifolds, denote its differential map $dg_p : T_p M \rightarrow T_{g(p)} N$. A vector field f on M is a possibly parameterized smooth section of the tangent bundle TM .

A Lie group G is a smooth manifold with group structure compatible with the manifold, *i.e.*, the group operation is a smooth mapping from the product manifold $G \times G$ to G , and the group inverse is a smooth mapping from G to G . For simplicity, we will assume that G is a matrix Lie group, a subgroup of $GL(n)$ for some n . For $g \in G$, define the left translation map $L_g : G \rightarrow G$ such that $L_g(h) = gh$. A Lie group G is immediately associated with its Lie algebra \mathfrak{g} , the set of left-invariant vector fields on G . A vector field f on G is left-invariant if for every $g, h \in G$,

$$f(gh) = (dL_g)_h(f(h)).$$

Every left-invariant vector field f can be identified with a tangent vector $\Theta \in T_e G$ at the identity $e \in G$, as

$$f(g) = (dL_g)_e(\Theta),$$

so, equivalently, $\mathfrak{g} = T_e G$. The Lie algebra \mathfrak{g} is endowed with the Lie bracket $[\cdot, \cdot]$ from the typical Lie bracket of two vector fields, where we use double square brackets to avoid confusion with intervals. The adjoint action of a Lie algebra element $\Theta_1 \in \mathfrak{g}$ is the mapping $\text{ad}_{\Theta_1}(\Theta_2) = [[\Theta_1, \Theta_2]]$ for every $\Theta_2 \in \mathfrak{g}$.

An element $\Theta \in \mathfrak{g}$ of the Lie algebra defines a unique one-parameter subgroup $\gamma_\Theta : \mathbb{R} \rightarrow G$, as the integral curve of the left-invariant vector field associated to Θ passing through $\gamma_\Theta(0) = e$. Define the exponential map $\exp : \mathfrak{g} \rightarrow G$, such that $\exp(\Theta) = \gamma_\Theta(1)$. Then, \exp maps a neighborhood of $0 \in \mathfrak{g}$ diffeomorphically to a neighborhood of $e \in G$ —denote this neighborhood $N_{\text{exp}} \subset G$. In the case of a matrix Lie

¹For the embedding system to be monotone, the inclusion function F should be monotone [19].

group, the exponential map coincides with the usual matrix exponential,

$$\exp(\Theta) = \sum_{k=0}^{\infty} \frac{\Theta^k}{k!}.$$

The group structure allows us to identify every tangent space $T_g G \simeq \mathfrak{g}$ with the left-translation map through *left-trivialization*. For a vector field f on G ,

$$\begin{aligned} \dot{g} = f(g) &= d(L_g \circ L_{g^{-1}})_g(f(g)) \\ &= (dL_g)_e \underbrace{((dL_{g^{-1}})_g(f(g)))}_{=: A(g)} = gA(g), \end{aligned}$$

where $A : G \rightarrow \mathfrak{g}$ and the last equality holds for matrix Lie groups. Any vector field is fully defined by such a left-trivialized mapping to the Lie algebra.

A *cone field* on a manifold M is a mapping \mathcal{K} such that for every $p \in M$, $\mathcal{K}(p) \subset T_p M$ is a cone in the tangent space at p . A cone field \mathcal{K} on Lie group G is left-invariant if

$$\mathcal{K}(gh) = (dL_g)_h(\mathcal{K}(h)),$$

for every $g, h \in G$. Similar to how any left-invariant vector field can be identified with a tangent vector at the identity e , every left-invariant cone field can be identified with a cone $K \subset \mathfrak{g}$ at the tangent space at the identity as

$$\mathcal{K}(g) = (dL_g)_e(K).$$

III. CONTROL SYSTEMS ON LIE GROUPS

A control system evolving on a Lie group state space \mathcal{X} is a nonlinear vector field on \mathcal{X} parameterized by an input in a vector space \mathcal{U} . Since the vector field can be left-trivialized by a mapping to the Lie algebra, without loss of generality, we assume that the control system is a tuple $\Sigma = (\mathcal{X}, \mathcal{U}, A)$, of a n -dimensional Lie group \mathcal{X} , a subset $\mathcal{U} \subset W$ of a m -dimensional vector space W , and a left-trivialized mapping $A : \mathcal{X} \times \mathcal{U} \rightarrow \mathfrak{g} = T_e \mathcal{X}$ defining the dynamics,

$$\Sigma : \{ \dot{x} = (dL_x)_e(A(x, u)) = xA(x, u), \quad (3) \}$$

where $t \in [0, \infty)$, $x \in \mathcal{X}$, and $u \in \mathcal{U}$. Note that the last equality holds for matrix Lie groups. This models a nonlinear control system on a Lie group. For simplicity, we will assume *forward completeness*, *i.e.*, for a fixed measurable $\mathbf{u} : [0, \infty) \rightarrow \mathcal{U}$, the solution to (3) is defined for every $t \in [0, \infty)$, and let $\phi_t(x_0, \mathbf{u})$ denote its trajectory from initial condition x_0 .

The Lie group structure allows us to define a locally equivalent system evolving on the Lie algebra $\mathfrak{g} = T_e \mathcal{X}$, using the differential of the exponential map. We follow a similar treatment as [15], with slight deviations for left-trivialization instead of right-trivialization.

Definition 1 (Differential of exp). For a Lie group G with Lie algebra \mathfrak{g} and exponential map $\exp : \mathfrak{g} \rightarrow G$, define the

function $\text{dexp} : \mathfrak{g} \times \mathfrak{g} \rightarrow \mathfrak{g}$ as the left-trivialized tangent of the exponential map, *i.e.*,

$$\begin{aligned} \frac{d}{dt} \exp(\Theta(t)) &= (dL_{\exp(\Theta(t))})_e(\text{dexp}_{\Theta(t)}(\Theta'(t))) \\ &= \exp(\Theta(t)) \text{dexp}_{\Theta(t)}(\Theta'(t)), \end{aligned}$$

where $\Theta(t) \in \mathfrak{g}$, $\Theta'(t) \in \mathfrak{g}$, and the last equality holds for matrix Lie groups.

For $\Theta \in \mathfrak{g}$, dexp_{Θ} has an analytic expression using the adjoint action of Θ ,

$$\text{dexp}_{\Theta} = \frac{1 - \exp(-\text{ad}_{\Theta})}{\text{ad}_{\Theta}} = \sum_{k=0}^{\infty} \frac{(-1)^k}{(k+1)!} (\text{ad}_{\Theta})^k, \quad (4)$$

and its inverse, $\text{dexp}_{\Theta}^{-1}$, can be obtained by inverting the analytic expression and taking its summation expansion,

$$\text{dexp}_{\Theta}^{-1} = \frac{\text{ad}_{\Theta}}{1 - \exp(-\text{ad}_{\Theta})} = \sum_{k=0}^{\infty} \frac{B_k}{k!} (\text{ad}_{\Theta})^k, \quad (5)$$

where B_k are the Bernoulli numbers with $B_1 = \frac{1}{2}$. dexp^{-1} allows one to define a vector field on the Lie algebra which exactly characterizes the local behavior of the true dynamics evolving on the original Lie group. In the literature [15], this is often called canonical coordinates of the first kind—in a sense, the integration is done in canonical coordinates centered around $\dot{x} = x_0 \exp(\Theta_0)^{-1}$.

Proposition 2 (Canonical coordinates). Consider the control system (3). For small $t \geq 0$, the trajectory $t \mapsto x(t)$ from initial condition x_0 under measurable $\mathbf{u} : [0, \infty) \rightarrow \mathcal{U}$ is given by

$$\Upsilon : \begin{cases} x(t) = x_0 \exp(\Theta_0)^{-1} \exp(\Theta(t)), \\ \dot{\Theta}(t) = \text{dexp}_{\Theta(t)}^{-1}(A(x(t), \mathbf{u}(t))), \\ \Theta(0) = \Theta_0, \end{cases} \quad (6)$$

for every $\Theta_0 \in N_{\text{exp}}$, $\Theta(t) \in \mathfrak{g}$ and dexp^{-1} defined as (5).

Proof. Let $t \mapsto \Theta(t)$ be defined such that $x(t) = x_0 \exp(\Theta_0)^{-1} \exp(\Theta(t))$. Since $x(0) = x_0$, $\Theta(0) = \Theta_0$. Differentiating with respect to t ,

$$\begin{aligned} \dot{x}(t) &= x_0 \exp(\Theta_0)^{-1} \exp(\Theta(t)) \text{dexp}_{\Theta(t)}(\dot{\Theta}(t)) \\ &= x(t) \text{dexp}_{\Theta(t)}(\dot{\Theta}(t)). \end{aligned}$$

But since $\dot{x}(t) = x(t)A(t, x(t), \mathbf{u}(t))$, this implies that $\text{dexp}_{\Theta(t)}(\dot{\Theta}(t)) = A(t, x(t), \mathbf{u}(t))$. Since $\Theta(0) = \Theta_0 \in N_{\text{exp}}$, N_{exp} is open, and the exponential map is bijective on N_{exp} , there exists a $T > 0$ such that for a.e. $t \leq T$,

$$\dot{\Theta}(t) = \text{dexp}_{\Theta(t)}^{-1}(A(t, x(t), \mathbf{u}(t))),$$

with $\Theta(t) \in N_{\text{exp}}$. \square

Proposition 2 provides a natural approach to adapt existing tools for numerical integration to Lie groups. If one were to apply traditional integration techniques to the nonlinear space \mathcal{X} , thought as a submanifold/subgroup of a known vector space, *e.g.*, $GL(n)$, the numerical approximation error will

quickly accumulate, causing the solution to drift away from the manifold. Instead, one can apply standard integration techniques to the system (6) evolving on the linear space \mathfrak{g} , with a small enough step size, and the exponential map guarantees that the solution will remain on the manifold. These types of geometric numerical integrators are explored in depth in [15], and a variant of the Runge-Kutta-Munthe-Kaas integration scheme [17] is implemented in Algorithm 1 for reachability.

IV. REACHABILITY VIA LIE ALGEBRA

Proposition 2 established a local equivalence between the control system (3) and the system (6), allowing us to improve simulation capabilities using the linear Lie algebra. In this section, we perform reachability analysis in the equivalent system (6) to obtain estimates in the original Lie group control system (3).

A. The tangent interval

We propose to study the following object living in the tangent space to the manifold.

Definition 3 (Tangent interval). Given a cone field \mathcal{K} on a differentiable manifold M , a point $p \in M$, and two vectors $\underline{v}_p, \bar{v}_p \in T_p M$ such that $\underline{v}_p \leq_{\mathcal{K}(p)} \bar{v}_p$, let

$$[\underline{v}_p, \bar{v}_p]_{\mathcal{K}(p)} := \{v_p \in T_p M : \underline{v}_p \leq_{\mathcal{K}(p)} v_p \leq_{\mathcal{K}(p)} \bar{v}_p\},$$

denote a *tangent interval*.

On its own, the tangent interval is not directly useful as it has no relation to the original manifold. However, when coupled with additional structure on the manifold, like the Lie group structure, this can become a useful object to study.

Suppose G is a Lie group with a left-invariant cone field \mathcal{K} identified by the cone $K \subset \mathfrak{g}$. One can left-trivialize a tangent interval $[\underline{v}_g, \bar{v}_g]_{\mathcal{K}(g)}$ by identifying the tangent space $T_g G$ with \mathfrak{g} in the usual way,

$$\begin{aligned} [\underline{v}_g, \bar{v}_g]_{\mathcal{K}(g)} &= d(L_g \circ L_{g^{-1}})_g([\underline{v}_g, \bar{v}_g]_{\mathcal{K}(g)}), \\ &= (dL_g)_e(\underbrace{(dL_{g^{-1}})_g([\underline{v}_g, \bar{v}_g]_{\mathcal{K}(g)})}_{=: [\underline{\Theta}, \bar{\Theta}]_K}), \end{aligned}$$

with $\underline{\Theta}, \bar{\Theta} \in \mathfrak{g}$, $\underline{\Theta} \leq_K \bar{\Theta}$, which follows since the cone field $\mathcal{K}(g)$ is left-invariant. Note that the last equality, read as the set image $\{g\Theta : \Theta \in [\underline{\Theta}, \bar{\Theta}]_K\}$, holds for matrix Lie groups. With the exponential map, a tangent interval represents a real set on the Lie group, namely

$$g \exp([\underline{\Theta}, \bar{\Theta}]_K) = \{g \exp(\Theta) : \underline{\Theta} \leq_K \Theta \leq_K \bar{\Theta}\},$$

which we call the *exponentiated tangent interval*.

B. Monotone Lie algebra dynamics

Equipped with the tangent interval, traditional monotone systems theory can be applied to the equivalent system (6), evolving in the vector space Lie algebra.

Theorem 4 (Monotone Lie algebra). Consider the control system (3), and the associated system (6) in the Lie algebra. Let \mathcal{K} be a left-invariant cone field on \mathcal{X} identified by $K \subset \mathfrak{X}$,

and let C be a cone on W . If Υ from (6) is monotone with respect to (\leq_K, \leq_C) , then for small $t \geq 0$,

$$\begin{aligned} x_0 \in \hat{x} \exp([\underline{\Theta}_0, \bar{\Theta}_0]_K) \text{ and } \mathbf{u}(t) \in [\underline{\mathbf{u}}(t), \bar{\mathbf{u}}(t)] \text{ a.e.} \\ \implies x(t) \in \hat{x} \exp([\underline{\Theta}(t), \bar{\Theta}(t)]_K), \end{aligned}$$

where $x(t) = \phi_t^\Sigma(x_0)$, $\underline{\Theta}(t) = \phi_t^\Upsilon(\underline{\Theta}_0)$, $\bar{\Theta}(t) = \phi_t^\Upsilon(\bar{\Theta}_0)$.

Proof. Let $x_0 \in \exp([\underline{\Theta}_0, \bar{\Theta}_0]_K)\hat{x}$, which implies the existence of $\Theta_0 \in [\underline{\Theta}_0, \bar{\Theta}_0]_K$ such that $x_0 = \exp(\Theta_0)\hat{x}$. In particular, this implies that $\underline{\Theta}_0 \leq_K \Theta_0$ and $\Theta_0 \leq_K \bar{\Theta}_0$. By hypothesis, (6) is monotone, thus,

$$\underline{\Theta}(t) \leq_K \Theta(t) \leq_K \bar{\Theta}(t), \quad (7)$$

where $\Theta(t) = \phi_t^\Upsilon(\Theta_0)$. Using Proposition 2, for small $t \geq 0$,

$$x(t) = \exp(\Theta(t)) \exp(\Theta_0)^{-1} x_0 = \exp(\Theta(t))\hat{x},$$

since $x_0 = \exp(\Theta_0)^{-1}\hat{x}$, completing the proof. \square

Theorem 4 allows us to simulate two trajectories in the Lie algebra to bound the reachable set on the original manifold for small $t > 0$. However, this is only valid as long as the interval $[\underline{\Theta}, \bar{\Theta}]_K$ remains inside the neighborhood N_{exp} , which cannot be guaranteed for any desired time $T > 0$.

C. Nonmonotone Lie algebra dynamics

In the case that the control system (6) is not monotone, when K and C are simplicial cones, one can build a mixed monotone embedding system instead. Recall that in the case of simplicial cones, the cone K can be identified with \mathbb{R}_+^n , and the vector space \mathfrak{g} can be identified with \mathbb{R}^n . Let $\hat{\cdot} : \mathbb{R}^n \rightarrow \mathfrak{g}$ denote this identification, and let $\cdot^\vee : \mathfrak{g} \rightarrow \mathbb{R}^n$ denote the inverse map. Under these identifications, *i.e.*, $\Theta = \hat{v}$, the system (6) can be written as follows,

$$\begin{aligned} \dot{v}(t) &= \hat{\Theta}(t)^\vee \\ &= \underbrace{\text{dexp}_{\hat{v}}^{-1}(A(x_0 \exp(\hat{v}_0))^{-1} \exp(\hat{v}), u)^\vee}_{=: f(v, u)}, \quad (8) \end{aligned}$$

where $v \in \mathbb{R}^n$, $u \in \mathbb{R}^m$, and $f : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}^n$. With an inclusion function $F : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}^n$ for f , the embedding system (2) can be used to obtain interval bounds on the reachable set of the Lie algebra system (6).

Theorem 5 (Embedded Lie algebra). Consider the control system (3), and the associated system (6) in the Lie algebra. Let \mathcal{K} be a left-invariant cone field on \mathcal{X} identified by simplicial cone $K \subset \mathfrak{X}$, and let C be a simplicial cone on W . If E (2) is the embedding system induced by an inclusion function F on (8), then for small $t \geq 0$,

$$\begin{aligned} x_0 \in \hat{x} \exp([\underline{\Theta}_0, \bar{\Theta}_0]_K) \text{ and } \mathbf{u}(t) \in [\underline{\mathbf{u}}(t), \bar{\mathbf{u}}(t)] \text{ a.e.} \\ \implies x(t) \in \hat{x} \exp([\underline{\Theta}(t), \bar{\Theta}(t)]_K), \end{aligned}$$

where $x(t) = \phi_t^\Sigma(x_0)$, $t \mapsto \begin{bmatrix} v(t) \\ \bar{v}(t) \end{bmatrix}$ is the trajectory of the embedding system (2), and $\underline{\Theta}(t) = \hat{v}(t)$, $\bar{\Theta}(t) = \hat{\bar{v}}(t)$.

Proof. The proof is identical to Theorem 4, with a slight modification to obtain the bound (7). Since (2) is an embedding system for (8),

$$\underline{v}(t) \leq v(t) \leq \bar{v}(t),$$

by [20, Proposition 5], which implies that

$$\underline{\Theta}(t) \leq_K \Theta(t) \leq_K \bar{\Theta}(t),$$

where $\Theta(t) = \phi_t^\Upsilon(\Theta_0)$ and $v(t) = \Theta(t)^\vee$. \square

In practice, obtaining an inclusion function F of f may be a difficult procedure, involving matrix exponentials, infinite summations, and nonlinearities.

D. Recentering via Baker-Campbell-Hausdorff (BCH) Formula

To extend Theorem 4 to arbitrary time horizons, we use an interval over-approximation of the BCH formula to “recenter” the tangent interval to ensure it remains in N_{exp} . Let G be a Lie group, with Lie algebra $\mathfrak{g} = T_e G$ and exponential map $\exp : \mathfrak{g} \rightarrow G$. Given sufficiently small $\Theta_1, \Theta_2 \in \mathfrak{g}$, the BCH formula solves for Θ_3 satisfying

$$\exp(\Theta_1) \exp(\Theta_2) = \exp(\Theta_3). \quad (9)$$

The non-commutativity of G implies that the solution will generally not be $\Theta_3 = \Theta_1 + \Theta_2$. Indeed, the BCH provides the solution as an infinite sum of commutators in the Lie algebra,

$$\begin{aligned} \Theta_3 = \text{bch}_{\Theta_2}(\Theta_1) &= \Theta_1 + \Theta_2 + \frac{1}{2} [\Theta_1, \Theta_2] \\ &+ \frac{1}{12} [\Theta_1, [\Theta_1, \Theta_2]] - \frac{1}{12} [\Theta_2, [\Theta_1, \Theta_2]] + \dots \end{aligned} \quad (10)$$

For some Lie group/Lie algebra pairs, the BCH formula may admit a simpler closed-form solution, as is the case for, *e.g.*, the Lie group $SO(3)$ [15, Appendix B].

Now, given a cone $K \subset \mathfrak{g}$ inducing the partial order \leq_K , we assume availability of an inclusion function $\text{BCH}_{\Theta_2} : \mathbb{I}_K \mathfrak{g} \rightarrow \mathbb{I}_K \mathfrak{g}$ for any $\Theta_2 \in \mathfrak{g}$, such that for every $\Theta_1 \in [\underline{\Theta}_1, \bar{\Theta}_1]_K \in \mathbb{I}_K \mathfrak{g}$,

$$\text{bch}_{\Theta_2}(\Theta_1) \in \text{BCH}_{\Theta_2}([\underline{\Theta}_1, \bar{\Theta}_1]_K). \quad (11)$$

In practice, this may be obtained in closed-form, or approximated using a sufficient truncation of (10) and off the shelf interval analysis techniques.

Proposition 6 (Recentering via BCH). Let G be a Lie group, with Lie algebra $\mathfrak{g} = T_e G$. For every $g \in G$, $[\underline{\Theta}, \bar{\Theta}]_K \in \mathbb{I}_K \mathfrak{g}$, and $\Theta \in \mathfrak{g}$,

$$\dot{g} \exp([\underline{\Theta}, \bar{\Theta}]_K) \subset \dot{g} \exp(\Theta) \exp(\text{BCH}_{-\Theta}([\underline{\Theta}, \bar{\Theta}]_K)).$$

Proof. Let $\Theta' \in [\underline{\Theta}, \bar{\Theta}]_K$. Since $\exp(\Theta)^{-1} = \exp(-\Theta)$,

$$\begin{aligned} \dot{g} \exp(\Theta') &= \dot{g} \exp(\Theta) \exp(-\Theta) \exp(\Theta') \\ &= \dot{g} \exp(\Theta) \exp(\text{bch}_{-\Theta}(\Theta')) \\ &\in \dot{g} \exp(\Theta) \exp(\text{BCH}_{-\Theta}([\underline{\Theta}, \bar{\Theta}]_K)), \end{aligned}$$

since $\text{BCH}_{-\Theta}$ is an inclusion function for $\text{bch}_{-\Theta}$. \square

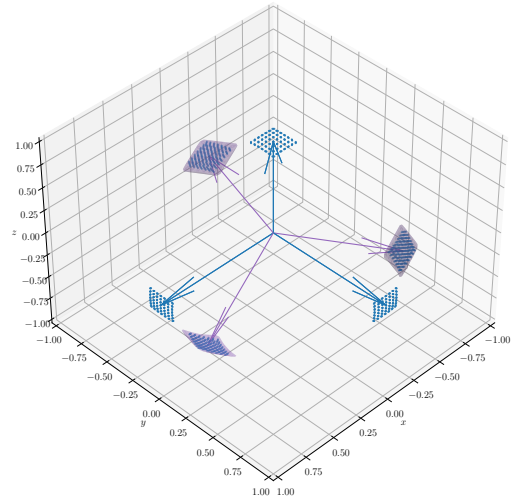


Fig. 2. A pictorial representation of a BCH inclusion function (11) for the Lie group $SO(3)$, with Lie algebra $\mathfrak{so}(3)$ and the cone K from Section V. The exponentiated tangent intervals $I \exp([-0.1, 0.1]^3)$ and $I \exp([0.2, 0.4]^3)$ centered around the identity matrix are pictured in blue, using an evenly spaced meshgrid of $7^3 = 343$ points exponentiated from the Lie algebra. The exponentiated tangent interval $\exp([0.3]^3) \exp(\text{BCH}_{[-0.3]^3}([0.2, 0.4]^3))$ centered around $\exp([0.3]^3)$ is pictured in purple. Visually, the geometry of the tangent interval centered at the identity before the BCH overapproximation is different than the geometry of the tangent interval centered at $\exp([0.3]^3)$.

The inclusion function BCH can be used to patch together valid reachable sets obtained using Theorem 4, to extend the reachable set to any arbitrary time $T > 0$. For example, a simple strategy would be to iteratively build reachable sets in the following manner. As input, take a left-trivialized exponentiated tangent interval $\dot{x}_t \exp([\underline{\Theta}_t, \bar{\Theta}_t]_K)$.

- (i) Simulate the lower and upper bounds of the monotone system (6) or the embedding system (2) to $t + \Delta t$, obtaining $\underline{\Theta}_{t+\Delta t}$ and $\bar{\Theta}_{t+\Delta t}$. The reachable set at $t + \Delta t$ is $\dot{x}_t \exp([\underline{\Theta}_{t+\Delta t}, \bar{\Theta}_{t+\Delta t}]_K)$.
- (ii) Select the midpoint $\hat{\Theta} = \frac{\underline{\Theta}_{t+\Delta t} + \bar{\Theta}_{t+\Delta t}}{2}$, and its associated Lie group element $\hat{x}_{t+\Delta t} = \dot{x}_t \exp(\hat{\Theta})$ for the next canonical centering.
- (iii) Use Proposition 6 to obtain an overapproximation $\hat{x}_{t+\Delta t} \exp(\text{BCH}_{-\hat{\Theta}}([\underline{\Theta}_{t+\Delta t}, \bar{\Theta}_{t+\Delta t}]_K))$.

This method returns a valid reachable set, as long as every $[\underline{\Theta}_t, \bar{\Theta}_t]_K \subset N_{\text{exp}}$.

In Algorithm 1, we implement this iterative scheme numerically, using the Runge-Kutta method in the Lie algebra. We refer to [21] for a more in-depth discussion about Butcher tableaux. As long as each $[\underline{\Theta}_n, \bar{\Theta}_n]_K \subset N_{\text{exp}}$, Theorem 4, Theorem 5, and Proposition 6 guarantee that Algorithm 1 returns a valid overapproximated reachable set on the Lie group, up to small numerical inaccuracies.

E. Abelian Lie groups

In an abelian (commutative) Lie group G , the Lie bracket is identically zero. A direct implication is, for any $X, Y \in \mathfrak{g}$,

$$\exp(X) \exp(Y) = \exp(X + Y), \quad (12)$$

Algorithm 1: Runge-Kutta-Munthe-Kaas Reachability in the Lie Algebra

Input: Initial set $\hat{x}_0 \exp([\underline{\Theta}_0, \bar{\Theta}_0]_K)$; control bounds $\underline{\mathbf{u}}, \bar{\mathbf{u}} : [0, \infty) \rightarrow \mathcal{U}$, left-trivialized dynamics $A : \mathcal{X} \times \mathcal{U} \rightarrow \mathfrak{g}$; time step $h > 0$; horizon N

Param: Butcher tableau $\{a_{kl}, b_l, c_k\}_{1 \leq k, l \leq \nu}$

for $n = 0, \dots, N - 1$ **do**

$\underline{\Omega}_0 = \underline{\Theta}_n; \bar{\Omega}_0 = \bar{\Theta}_n;$

for $k = 1, \dots, \nu$ **do**

$\underline{\Omega}_k = \underline{\Omega}_0 + \sum_{l=1}^{\nu} a_{kl} \underline{F}_l; \bar{\Omega}_k = \bar{\Omega}_0 + \sum_{l=1}^{\nu} a_{kl} \bar{F}_l;$

if Υ (6) *is monotone* **then**

Use Theorem 4:

$\underline{F}_k = \text{dexp}_{\underline{\Omega}_k}^{-1}(hA(\hat{x}_n \exp(\underline{\Omega}_k), \underline{\mathbf{u}}(t_n + c_k h)));$

$\bar{F}_k = \text{dexp}_{\bar{\Omega}_k}^{-1}(hA(\hat{x}_n \exp(\bar{\Omega}_k), \bar{\mathbf{u}}(t_n + c_k h)));$

else if K, C *simplicial* **then**

Use Theorem 5:

$\begin{bmatrix} \hat{F}_k \\ \bar{F}_k \end{bmatrix} = h\mathbf{E} \left(\begin{bmatrix} \underline{\Omega}_k^\vee \\ \bar{\Omega}_k^\vee \end{bmatrix}, \begin{bmatrix} \underline{\mathbf{u}}(t_n + c_k h) \\ \bar{\mathbf{u}}(t_n + c_k h) \end{bmatrix} \right);$

$\underline{\Omega} = \sum_{l=1}^{\nu} b_l \underline{F}_l; \bar{\Omega} = \sum_{l=1}^{\nu} b_l \bar{F}_l;$

if *BCH recentering condition* **then**

$\Omega = \frac{\underline{\Omega} + \bar{\Omega}}{2}; \hat{x}_{n+1} \leftarrow \hat{x}_n \exp(\Omega);$

$[\underline{\Theta}_{n+1}, \bar{\Theta}_{n+1}]_K \leftarrow \text{BCH}_{-\Omega}([\underline{\Omega}, \bar{\Omega}]_K);$

else

$\hat{x}_{n+1} \leftarrow \hat{x}_n;$

$[\underline{\Theta}_{n+1}, \bar{\Theta}_{n+1}]_K \leftarrow [\underline{\Omega}, \bar{\Omega}]_K;$

return Reachable set $\{\hat{x}_n \exp([\underline{\Theta}_n, \bar{\Theta}_n]_K)\}_{n=0}^N;$

which follows by a straightforward computation from the BCH formula (10). The following Proposition characterizes some interesting behavior for abelian Lie groups.

Proposition 7 (Abelian Lie groups). Let G be an abelian Lie group, with a left-invariant cone field \mathcal{K} identified by $K \subset \mathfrak{g}$. The following statements hold:

- (i) The left-trivialized dexp_{Θ} and $\text{dexp}_{\Theta}^{-1}$ is the identity map for every $\Theta \in \mathfrak{g}$;
- (ii) The function $\text{BCH}_{\Theta}([\underline{\Omega}, \bar{\Omega}]_K) = [\underline{\Omega} + \Theta, \bar{\Omega} + \Theta]_K$ is an inclusion function for bch_{Θ} .

Proof. Regarding (i), let $\Theta, \Omega \in \mathfrak{g}$. Since G is Abelian,

$$\begin{aligned} \frac{d}{dt} \Big|_{t=0} \exp(\Theta + t\Omega) &= \frac{d}{dt} \Big|_{t=0} \exp(\Theta) \exp(t\Omega) \\ &= \exp(\Theta) \frac{d}{dt} \Big|_{t=0} \exp(t\Omega) \end{aligned}$$

Since $\exp(t\Omega)$ the same as the integral curve $\gamma : \mathbb{R} \rightarrow G$ of the left-invariant vector field Ω passing through $\gamma(0) = e$, $\frac{d}{dt} \Big|_{t=0} \exp(t\Omega) = \gamma'(0) = \Omega$. Thus,

$$\frac{d}{dt} \Big|_{t=0} \exp(\Theta + t\Omega) = \exp(\Theta)\Omega.$$

Thus, the left-trivialized dexp is $\text{dexp}_{\Theta}(\Omega) = \Omega$, which in turn implies that $\text{dexp}_{\Theta}^{-1}$ is also the identity map.

Regarding (ii), let $\Theta \in \mathfrak{g}$, and $\Omega \in [\underline{\Omega}, \bar{\Omega}]_K \in \mathbb{I}_K \mathfrak{g}$. Since the Lie bracket is identically zero, using (10)

$$\text{bch}_{\Theta}(\Omega) = \Theta + \Omega \in [\underline{\Omega} + \Theta, \bar{\Omega} + \Theta]_K,$$

completing the proof. \square

In the case of an abelian state space, Proposition 7 simplifies Algorithm 1. Statement (i) removes the need to evaluate the dexp^{-1} function to define the dynamics (6), which also makes it simpler to verify the monotonicity Υ . Statement (ii) provides a simple characterization of the BCH inclusion function as a translational shift in the Lie algebra, which simplifies the recentering process. Additionally, the bidirectionality of (ii), *i.e.*,

$$\text{BCH}_{-\Theta}([\underline{\Omega} + \Theta, \bar{\Omega} + \Theta]_K) = [\underline{\Omega}, \bar{\Omega}]_K,$$

guarantees no additional overapproximation error in the recentering step.

V. CASE STUDIES

A. Monotonicity on the 2-torus

Consider the torus identified with the abelian matrix group $SO(2)^2$ and the consensus dynamics

$$\dot{x}_1 = x_1 (\hat{\omega}_1 + \log(x_2 x_1^{-1})), \quad \dot{x}_2 = x_2 (\hat{\omega}_2 + \log(x_1 x_2^{-1})),$$

where $x_1, x_2 \in SO(2)$, $\log : SO(2) \rightarrow \mathfrak{so}(2)$, $\omega_1, \omega_2 \in \mathbb{R}$, and the hat identification $\hat{\cdot} : \mathbb{R} \rightarrow \mathfrak{so}(2)$ such that $\hat{\omega} = \begin{bmatrix} 0 & -\omega \\ \omega & 0 \end{bmatrix}$. Define the vee map $\cdot^\vee : \mathfrak{so}(2) \rightarrow \mathbb{R}$ as the inverse of the hat map. The exponential map $\exp : \mathfrak{so}(2) \rightarrow SO(2)$ is injective on the neighborhood $N_{\text{exp}} = (-\pi, \pi)^2$.

The locally equivalent system (6) around a center \hat{x} on the Lie algebra is,

$$\begin{aligned} \dot{\theta}_1^\vee &= \omega_1 + \log(\hat{x}_2 \exp(\theta_2) \hat{x}_1^{-1} \exp(-\theta_1))^\vee \\ \dot{\theta}_2^\vee &= \omega_2 + \log(\hat{x}_1 \exp(\theta_1) \hat{x}_2^{-1} \exp(-\theta_2))^\vee \end{aligned} \quad (13)$$

where $\theta_1, \theta_2 \in N_{\text{exp}}$. It can be shown that (13) is monotone as long as $(\log(\hat{x}_2) + \theta_2 - \log(\hat{x}_1) - \theta_1)^\vee \in (-\pi, \pi)$, which occurs when $\log(\hat{x}_2), \theta_2, \log(\hat{x}_1), \theta_1$ all lie within a single tangent interval of less than π width.

Consider the left-invariant cone field \mathcal{K} induced by $K = (\widehat{\mathbb{R}_+})^2$. We apply Algorithm 1, with $\omega_1 = 5$, $\omega_2 = 2$, $x_1(0) \in \exp\left(\frac{\hat{\pi}}{2}\right) \exp([-0.6, 0.6]_K)$ and $x_2(0) \in \exp(\hat{\pi}) \exp([-0.1, 0.1]_K)$. We check to ensure the system is indeed monotone at every time step. Finally, since $SO(2)^2$ is abelian, we recenter at every time step at no loss. Figure 3 shows the reachable set computed to $T = 3s$, which took 0.039 ± 0.002 averaged over 100 runs.

B. Attitude control on $SO(3)$

Consider the following control system on $SO(3)$,

$$\dot{R} = R\hat{u}, \quad (14)$$

where $R \in SO(3)$ is the satellite's state, $u \in \mathcal{U} = \mathbb{R}^3$, and the hat map $\hat{\cdot} : \mathbb{R}^3 \rightarrow \mathfrak{so}(3)$ is defined using the basis

$$X = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & -1 \\ 0 & 1 & 0 \end{bmatrix}, \quad Y = \begin{bmatrix} 0 & 0 & 1 \\ 0 & 0 & 0 \\ -1 & 0 & 0 \end{bmatrix}, \quad Z = \begin{bmatrix} 0 & -1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}, \quad (15)$$

$$\hat{u} = u_1 X + u_2 Y + u_3 Z,$$

for $\mathfrak{so}(3)$. The system Υ (6) is

$$\dot{\Theta}(t) = \text{dexp}_{\Theta}^{-1}(\hat{u}) = \text{dexp}_{\Theta}^{-1}(u_1 X + u_2 Y + u_3 Z) \quad (16)$$

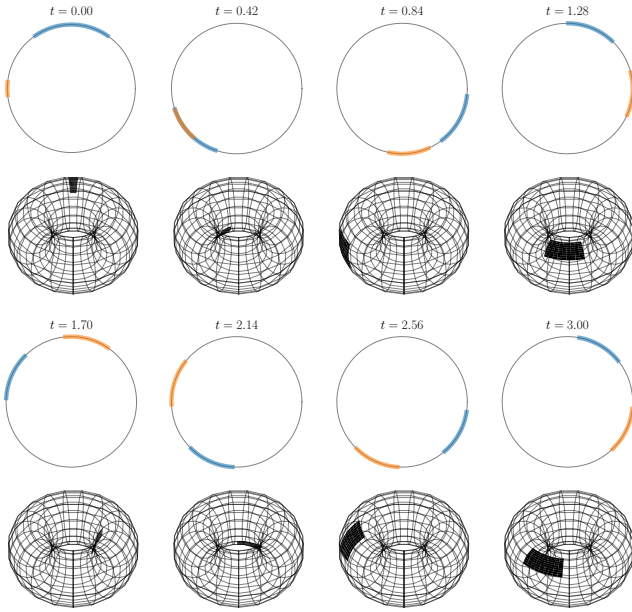


Fig. 3. The reachable set $\{\hat{x}_t \exp([\underline{\Theta}_t, \overline{\Theta}_t]_K)\}_t$ for the coupled oscillators is visualized as two arcs on a circle, as well as a on a torus embedded in \mathbb{R}^3 . For this system, the uncertainty in the initial condition of the blue oscillator begins larger than the orange oscillator, but the uncertainty is quickly shared between the two. For the abelian torus, the recentering can be done without any loss of information, allowing the reachable set to remain tight to the true reachable set.

Consider the left-invariant cone field \mathcal{K} induced by the cone $K \subset \mathfrak{so}(3)$, where $K = \{k_1 X + k_2 Y + k_3 Z : k_1, k_2, k_3 \geq 0\}$. The basis $\{X, Y, Z\}$ provides the identification $\mathfrak{so}(3) \simeq \mathbb{R}^3$ and $K \simeq \mathbb{R}_+^3$. In the basis, the commutator $[\hat{u}, \hat{v}] = \widehat{u \times v}$, where \times is the cross product on \mathbb{R}^3 . As such, the $\hat{\cdot}$ -identified dexp^{-1} (5) and BCH formula (10) become vector valued functions $\text{dexp}^{-1} : \mathbb{R}^3 \times \mathbb{R}^3 \rightarrow \mathbb{R}^3$ and $\text{bch} : \mathbb{R}^3 \rightarrow \mathbb{R}^3$, involving cross products. Using the natural inclusion function from `npinterval` [22], we compute inclusion functions $\text{DEXPINV} : \mathbb{I}\mathbb{R}^3 \times \mathbb{I}\mathbb{R}^3 \rightarrow \mathbb{I}\mathbb{R}^3$ and $\text{BCH}_{\Theta} : \mathbb{I}\mathbb{R}^3 \rightarrow \mathbb{I}\mathbb{R}^3$ by truncating the series expansions (5) and (10) to only include second-order terms and below. DEXPINV allows us to embed (16) into an embedding system (2) using the identification from (8).

We consider the following time-varying control input $\mathbf{u} : [0, 5] \rightarrow \mathbb{R}^3$,

$$\mathbf{u}(t) = \left[\frac{5-t}{5}, 1 - \left(\frac{t}{5}\right)^2, \sin\left(\frac{\pi t}{2}\right) \right]^T + w(t),$$

with $w(t) \in [-0.01, 0.01]^3$, and the initial set $\exp([-0.01, 0.01]^3) \subset SO(3)$. We apply Algorithm 1 with the *BCH recentering condition* set to `TRUE`, i.e., recentering at every time step, and plot the results in Figure 4. Computing the reachable set to $T = 5$ seconds took 0.438 ± 0.080 seconds, averaged over 100 runs. With the *BCH recentering condition* set to `FALSE`, i.e., no recentering at all, monte carlo simulations show that the reachable set obtained by the algorithm fails to overapproximate the true reachable set after only 0.5 seconds.

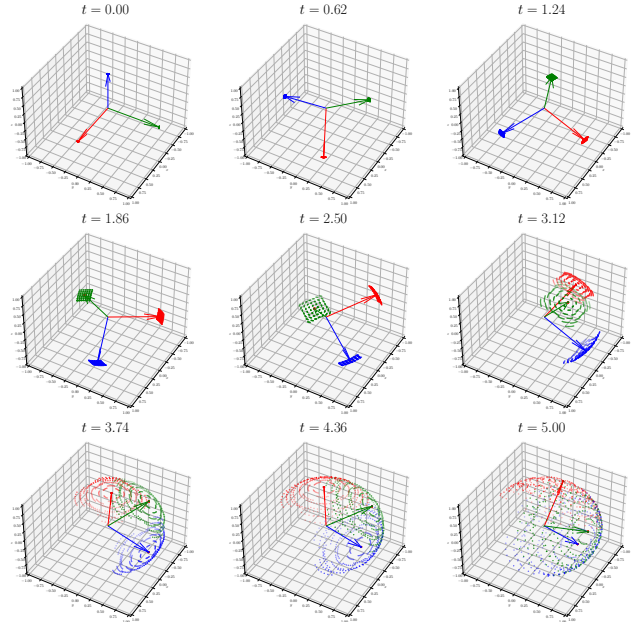


Fig. 4. The over-approximated reachable set $\{\hat{x}_t \exp([\underline{\Theta}_t, \overline{\Theta}_t]_K)\}_t$ for the orientation of a satellite evolving on $SO(3)$, for the run constantly recentering using BCH. The coordinate frame visualizes \hat{x}_t , where red, green, blue represent the x , y , and z -axes respectively. The point clouds represent the reachable set. Each point is generated from an evenly spaced meshgrid of $7^3 = 343$ points $\Theta_t \in [\underline{\Theta}_t, \overline{\Theta}_t]_K$ in the Lie algebra which are exponentiated to the element $\hat{x}_t \exp(\Theta_t)$ in the Lie group.

VI. DISCUSSION

A. Other reachability approaches

In general, since the Lie algebra dynamics (6) evolve on a vector state space, it may be possible to consider other set geometries in the tangent space beyond intervals, such as polytopes and zonotopes, allowing the use of other reachable set toolboxes with different capabilities. Rather than simply using an inclusion function for the BCH formula, these approaches may benefit from more accurate polytope bounding methods, and this is an interesting direction for future research.

B. Other mappings from the tangent space

The key properties of the Lie exponential map \exp used was its injectivity in the neighborhood N_{exp} around $0 \in \mathfrak{g}$ to a neighborhood around $e \in G$, as well as the BCH formula 10. In particular, the same theory applies for any other collection of mappings $\psi_p : T_p M \rightarrow M$, provided they also restrict to a diffeomorphism for some neighborhood U_p of each p , and one can overapproximate the transition between tangent space, i.e., bound h_q in

$$\psi_p(v_p) = \psi_q(h_q(v_p)),$$

with an inclusion function H_q .

C. Comparison to differential positivity

Consider a manifold \mathcal{X} with a cone field \mathcal{K} . A conal curve is a smooth curve $\gamma : I \rightarrow \mathcal{X}$, such that $\gamma'(s) \in \mathcal{K}(\gamma(s))$ for every $s \in I$. A cone field \mathcal{K} endows the manifold \mathcal{X} with

the conal order $\preceq_{\mathcal{K}}$, where for $x_1, x_2 \in \mathcal{X}$, $x_1 \preceq_{\mathcal{K}} x_2$ if and only if there exists a conal curve $\gamma : [0, 1] \rightarrow \mathcal{X}$ such that $\gamma(0) = x_1$ and $\gamma(1) = x_2$. For $\underline{x}, \bar{x} \in \mathcal{X}$, define the conal interval $[\underline{x}, \bar{x}]_{\mathcal{K}} := \{x \in \mathcal{X} : \underline{x} \preceq_{\mathcal{K}} x \preceq_{\mathcal{K}} \bar{x}\}$.

The system defined by

$$\dot{x} = f(x),$$

is differentially positive with respect to \mathcal{K} if its linearization leaves \mathcal{K} invariant, *i.e.*, for every $x \in \mathcal{X}$ and $t > 0$,

$$v_x \in \mathcal{K}(x) \implies (d\phi_t)_x(v_x) \in \mathcal{K}(\phi_t(x)),$$

where $\phi_t(x)$ is the flow from x . It can be shown that differentially positive systems exhibit a similar characteristic to monotone systems through the conal order, namely that

$$x_0 \in [\underline{x}_0, \bar{x}_0]_{\mathcal{K}} \implies \phi_t(x_0) \in [\underline{x}(t), \bar{x}(t)]_{\mathcal{K}}, \quad (17)$$

where $\underline{x}(t) = \phi_t(\underline{x}_0)$ and $\bar{x}(t) = \phi_t(\bar{x}_0)$. However, this property is not enough to characterize reachable sets on a manifold. In the next Example, we explore how the conal order can lose all sense of locality.

Example 8 (Conal intervals on \mathbb{S}). There are only two choices of smooth and nonvanishing cone fields on \mathbb{S} : in each tangent space, choose either the ray pointing counterclockwise or clockwise; for smoothness to hold, all tangent spaces should be the same choice of clockwise or counterclockwise. Between any two points on the circle, there is a curve between them in either the clockwise or counterclockwise direction, *i.e.*, one can construct a conal curve between every two points. In either cone field, two points are always conally ordered. Any conal interval $[\underline{x}, \bar{x}]_{\mathcal{K}}$ therefore represents the entire circle. So while (17) holds trivially, it is not helpful for characterizing any real reachable sets on the manifold.

In [12], [13], [14], the authors consider infinitesimal properties of the differentially positive system, which subvert the use of the conal interval. While the conal order is generally not a global partial order on \mathcal{X} , it is a *local* partial order, in the sense that for every $x \in \mathcal{X}$, there exists a restriction to an open neighborhood N_x where the conal order partially orders N_x [11, Proposition 1.13]. This neighborhood is generally hard to find, and there has been some work in understanding the connection between the exponential map and the conal order [23]. Rather than finding this neighborhood, the tangent interval from Definition 3 incurs some extra overapproximation error through the BCH inclusion function, but allows us to simply use the exponential map from the Lie algebra of any Lie group.

VII. CONCLUSIONS

In this paper, we developed a framework for efficient reachable set overapproximation in a class of systems evolving on Lie groups. Our approach considers a locally equivalent system on the Lie algebra, evolving a tangent interval using monotone dynamics in the Lie algebra or an embedding system for small t , and recentering using an inclusion function for the Baker–Campbell–Hausdorff formula to remain inside the injectivity neighborhood of the exponential map.

Ultimately, we developed Algorithm 1, which implements this reachability scheme using Runge-Kutta-Munthe-Kaas integration in the Lie algebra. We demonstrated the approach on a consensus problem on a torus, as well as a satellite attitude control problem. In future work, we hope to extend this approach to other, more general manifolds.

REFERENCES

- [1] X. Chen and S. Sankaranarayanan, “Reachability analysis for cyber-physical systems: Are we there yet?” in *NASA Formal Methods Symposium*. Springer, 2022, pp. 109–130.
- [2] M. Althoff, “An introduction to cora 2015,” in *Proc. of the 1st and 2nd Workshop on Applied Verification for Continuous and Hybrid Systems*. EasyChair, December 2015, pp. 120–151. [Online]. Available: <https://easychair.org/publications/paper/xMm>
- [3] S. Bogomolov, M. Forets, G. Frehse, K. Potomkin, and C. Schilling, “Juliareach: a toolbox for set-based reachability,” in *Proceedings of the 22nd ACM International Conference on Hybrid Systems: Computation and Control*, 2019, pp. 39–44.
- [4] J. A. dit Sandretto and A. Chapoutot, “Validated explicit and implicit Runge–Kutta methods,” *Reliable Computing*, vol. 22, no. 1, pp. 79–103, Jul 2016.
- [5] J. M. Selig, *Geometrical methods in robotics*. Springer Science & Business Media, 2013.
- [6] P. Crouch, “Spacecraft attitude control and stabilization: Applications of geometric control theory to rigid body models,” *IEEE Transactions on Automatic Control*, vol. 29, no. 4, pp. 321–331, 1984.
- [7] P. E. Crouch and A. J. van der Schaft, *Variational and Hamiltonian control systems*. Springer, 1987.
- [8] F. Bullo and A. D. Lewis, *Geometric Control of Mechanical Systems: Modeling, Analysis, and Design for Simple Mechanical Control Systems*. Springer New York, 2005. [Online]. Available: <http://dx.doi.org/10.1007/978-1-4899-7276-7>
- [9] D. Angeli and E. D. Sontag, “Monotone control systems,” *IEEE Transactions on automatic control*, vol. 48, no. 10, pp. 1684–1698, 2003.
- [10] S. Coogan and M. Arcak, “Efficient finite abstraction of mixed monotone systems,” in *Proceedings of the 18th International Conference on Hybrid Systems: Computation and Control*, 2015, pp. 58–67.
- [11] J. D. Lawson, “Ordered manifolds, invariant cone fields, and semigroups,” *Forum mathematicum*, vol. 1, no. 3, pp. 273–308, 1989. [Online]. Available: <http://eudml.org/doc/141617>
- [12] F. Forni and R. Sepulchre, “Differentially positive systems,” *IEEE Transactions on Automatic Control*, vol. 61, no. 2, pp. 346–359, 2016.
- [13] C. Mostajeran and R. Sepulchre, “Positivity, monotonicity, and consensus on lie groups,” *SIAM Journal on Control and Optimization*, vol. 56, no. 3, pp. 2436–2461, 2018. [Online]. Available: <https://doi.org/10.1137/17M1127168>
- [14] —, “Monotonicity on homogeneous spaces,” *Mathematics of Control, Signals, and Systems*, vol. 30, pp. 1–25, 2018.
- [15] A. Iserles, H. Z. Munthe-Kaas, S. P. Nørsett, and A. Zanna, “Lie-group methods,” *Acta Numerica*, vol. 9, p. 215–365, 2000.
- [16] E. Hairer, M. Hochbruck, A. Iserles, and C. Lubich, “Geometric numerical integration,” *Oberwolfach Reports*, vol. 3, no. 1, pp. 805–882, 2006.
- [17] H. Munthe-Kaas, “Runge-kutta methods on lie groups,” *BIT Numerical Mathematics*, vol. 38, pp. 92–111, 1998.
- [18] S. Blanes, F. Casas, J.-A. Oteo, and J. Ros, “The magnus expansion and some of its applications,” *Physics reports*, vol. 470, no. 5-6, pp. 151–238, 2009.
- [19] L. Jaulin, M. Kieffer, O. Didrit, and É. Walter, *Applied Interval Analysis*. Springer London, 2001.
- [20] S. Jafarpour, A. Harapanahalli, and S. Coogan, “Efficient interaction-aware interval analysis of neural network feedback loops,” *arXiv preprint arXiv:2307.14938*, 2023.
- [21] J. C. Butcher, “Implicit runge-kutta processes,” *Mathematics of computation*, vol. 18, no. 85, pp. 50–64, 1964.
- [22] A. Harapanahalli, S. Jafarpour, and S. Coogan, “A toolbox for fast interval arithmetic in numpy with an application to formal verification of neural network controlled systems,” 2023.
- [23] D. Mittenhuber and K.-H. Neeb, “On the exponential function of an ordered manifold with affine connection,” *Mathematische Zeitschrift*, vol. 218, no. 1, pp. 1–24, 1995.