

Convergence Analysis of Flow Matching in Latent Space with Transformers

Yuling Jiao

*School of Mathematics and Statistics
and Hubei Key Laboratory of Computational Science
Wuhan University, Wuhan 430072, China*

YULINGJIAOMATH@WHU.EDU.CN

Yanming Lai

*Department of Mathematics
The Hong Kong University of Science and Technology
Clear Water Bay, Kowloon, Hong Kong, China*

YLAIAM@CONNECT.UST.HK

Yang Wang

*Department of Mathematics
The Hong Kong University of Science and Technology
Clear Water Bay, Kowloon, Hong Kong, China*

YANGWANG@UST.HK

Bokai Yan*

*Department of Mathematics
The Hong Kong University of Science and Technology
Clear Water Bay, Kowloon, Hong Kong, China*

BYANAC@CONNECT.UST.HK

Editor: My editor

Abstract

We present theoretical convergence guarantees for ODE-based generative models, specifically flow matching. We use a pre-trained autoencoder network to map high-dimensional original inputs to a low-dimensional latent space, where a transformer network is trained to predict the velocity field of the transformation from a standard normal distribution to the target latent distribution. Our error analysis demonstrates the effectiveness of this approach, showing that the distribution of samples generated via estimated ODE flow converges to the target distribution in the Wasserstein-2 distance under mild and practical assumptions. Furthermore, we show that arbitrary smooth functions can be effectively approximated by transformer networks with Lipschitz continuity, which may be of independent interest.

Keywords: deep generative model, ODE flow, transformer network, end-to-end error bound

1 Introduction

A wide variety of statistics and machine learning problems can be framed as generative modeling, especially when there is an emphasis on accurately modeling and efficiently sampling from intricate distributions, including those associated with images, sound, and text. The essence of generative modeling lies in its ability to learn a target distribution from

*. Corresponding author.

finite samples, a task at which models incorporating deep neural networks have recently achieved considerable success.

Generative Adversarial Networks (GANs; Goodfellow et al. (2014); Arjovsky et al. (2017)), as a flagship example of deep generative models, have successfully been applied to a wide range of application challenges, including the synthesis of photorealistic images and videos (Radford et al., 2015; Wang et al., 2018; Chan et al., 2019), data augmentation (Frid-Adar et al., 2018), style transfer (Zhu et al., 2017), and facial editing (Karras et al., 2019). Additionally, significant research has been conducted to analyze the theoretical properties of GANs. Bai et al. (2018) demonstrated that GANs could learn distributions within the Wasserstein distance, provided the discriminator class has sufficient distinguishing capability against the generator class. Chen et al. (2020b) established a minimax optimal convergence rate based on optimal transport theory, which necessitates the input and output dimensions of the generator to be identical. Huang et al. (2022) proved that GANs could learn any distribution with bounded support. Despite their theoretical elegance and practical achievements, GANs often encounter challenges such as training instability, mode collapse, and difficulties in evaluating the quality of generated data.

The recent breakthrough known as the diffusion model has gained notable attention for its superior sample quality and a significantly more stable and controllable training process compared to GANs. The initial concept of the diffusion model involves training a denoising model to progressively transform noise data into samples that adhere to the target distribution (Ho et al., 2020), which has soon been mathematically proven to correspond to learning either the drift term of a Stochastic Differential Equation (SDE) or the velocity field of an Ordinary Differential Equation (ODE) (Song et al., 2021). In SDE-based methods, the target data density degenerates into a simpler Gaussian density through the Ornstein-Uhlenbeck (OU) process, followed by solving a reverse-time SDE to generate samples from noise (Ho et al., 2020; Song et al., 2021; Meng et al., 2021). Researchers have also proposed the diffusion Schrödinger Bridge (SB), which formulates a finite-time SDE, effectively accelerating the simulation time (De Bortoli et al., 2021). The achievements of ODE-based methods are equally remarkable, with most adopting an approach involving interpolative trajectory modeling (Liu et al., 2022b; Albergo and Vanden-Eijnden, 2022; Liu et al., 2023; Xu et al., 2022). Liu et al. (2022b) employs linear interpolation to connect the target distribution with a reference distribution, while Albergo and Vanden-Eijnden (2022) extends this interpolation to nonlinear cases. Further Gao et al. (2023) uses interpolation to analyze the regularity of a broad class of ODE flows.

In the past few years, there has been an explosive development in SDE/ODE-based generative models, with many models showcasing outstanding performance across a diverse array of application challenges. Dhariwal and Nichol (2021) have demonstrated that diffusion models outperform GANs in both unconditional and conditional image synthesis, setting a new benchmark in the quality of generated images. Rombach et al. (2022) showed that generative processes operating in a latent space can significantly reduce computational resources while maintaining high-quality text-to-image generation. A line of research (Kong et al., 2020; Chen et al., 2020c; Popov et al., 2021; Liu et al., 2022a) introduced versatile diffusion models capable of synthesizing high-fidelity audio, marking considerable progress in the quality of speech and music generation. Additionally, considerable research has concentrated on text-to-video generation, aiming to create long videos while maintaining

high visual quality and adherence to the user’s prompt (Blattmann et al., 2023a,b; Wu et al., 2023; Chen et al., 2024; Wang et al., 2024; Brooks et al., 2024). Despite these models being tailored for various tasks, they typically share two common features. Firstly, they utilize an encoder-decoder architecture to map high-dimensional original inputs to a low-dimensional latent space, where the SDE/ODE-based generative process takes place. Secondly, they employ transformers as the backbone architecture.

Although some analyses have attempted to explain the success of SDE/ODE-based generative models, these analyses either involve technical and unverifiable assumptions or do not align with the models actually used in practice. In a series of studies (Lee et al., 2022, 2023; De Bortoli, 2022; Chen et al., 2022, 2023a; Benton et al., 2023; Conforti et al., 2023), researchers systematically examined the sampling errors of diffusion models across various target distributions and have determined the optimal sampling error order. Their analysis assumes that the velocity field or drift term in diffusion models has been well-trained, without considering the training process and model selection, thus not providing an end-to-end analysis. It should be noted that end-to-end error analysis is rarely observed even in the domain of general ODE/SDE generative methods. To our knowledge, Wang et al. (2021) first proved the consistency of the Schrödinger Bridge approach through an end-to-end analysis. Oko et al. (2023) proved that in an SDE-based generative model, when the true density function has certain regularities and the empirical score matching loss is properly minimized, the generated data distribution achieves nearly minimax optimal estimation rates in total variation distance and Wasserstein-1 distance. Tang and Yang (2024) further extended the analysis to the intrinsic manifold assumption. Chen et al. (2023b) considered a special case in which the encoder and decoder are linear models. Chang et al. (2024) developed an ODE-based framework and derived a non-asymptotic convergence rate in the Wasserstein-2 distance. However, these analyses do not consider the transformer architecture or incorporate pre-training, which are commonly used in practical implementations, leaving a gap in explaining the success of SDE/ODE-based generative models.

In this paper, we mathematically prove that the distribution of the samples generated via ODE flow converges to the target distribution in the Wasserstein-2 distance under mild and practical assumptions, providing the first comprehensive end-to-end error analysis that considers the transformer architecture and allows for domain shift in pre-training.

1.1 Our main contributions

Our main contributions are summarized as follows.

- We establish approximation guarantees for transformer networks subject to Lipschitz continuity constraints, which may be of independent interest. (Theorem 8 and 9). Specifically, we prove that the transformer network can approximate any function, with the Lipschitz continuity of the network remaining independent of the approximation error. Under the assumption that the target distribution has bounded support, we show that the ground truth velocity field is a smooth function, allowing it to be sufficiently approximated by a properly chosen transformer network.
- We establish statistical guarantees for pre-training using the learned encoder and decoder network (Lemma 16). Choosing transformer networks as our encoder and

decoder, we show that the excessive risk of reconstruction loss converges at a rate of $\tilde{\mathcal{O}}(m^{-\frac{1}{D+2}})$, where m is the pre-training sample size, only under the assumptions that the pre-trained data distribution has bounded support and that there exist smooth functions minimizing the reconstruction loss.

- We establish estimation guarantees for the target distribution using the estimated velocity field (Theorem 17). By choosing proper discretization step size and early stopping time for generating samples, we prove that $\mathbb{E}_{\mathcal{Y}, \mathcal{X}}[W_2(\hat{\gamma}_T, \gamma_1)] = \mathcal{O}(\sqrt{\varepsilon_{\tilde{\gamma}_1}} + \varepsilon_{\tilde{\gamma}_1, \gamma_1})$, where $\hat{\gamma}_T$ is the generated data distribution, γ_1 is the target distribution, $\varepsilon_{\tilde{\gamma}_1, \gamma_1}$ denotes the domain shift between the target distribution and the pre-trained data distribution, and $\varepsilon_{\tilde{\gamma}_1}$ is the minimum reconstruction loss achievable by the encoder-decoder architecture. Specifically, if there is no domain shift and the encoder-decoder architecture can perfectly reconstruct the distribution, our results show that the generated data distribution converges to the target distribution in Wasserstein-2 distance.

1.2 Organization

The rest of the paper is organized as follows. In Section 2, we provide notations and introduce key concepts. In Section 3, we show that the true velocity field can be well approximated by a Lipschitz transformer network. In Section 4, we show that the true velocity field can be efficiently estimated, and analyze the error of distribution recovery using the estimated velocity field. Finally, in Section 5, we analyze the error introduced by the pre-trained autoencoder.

2 Preliminaries

In this section, we introduce the notations used throughout this paper. Additionally, we provide details about transformer networks, pre-training, and flow matching.

Notations. Here we summarize the notations. Given a real number α , we denote $\lfloor \alpha \rfloor$ as the largest integer smaller than α (in particular, if α is an integer, $\lfloor \alpha \rfloor = \alpha - 1$). For a vector $\mathbf{x} \in \mathbb{R}^d$, we denote its ℓ^2 -norm by $\|\mathbf{x}\|$, the ℓ^∞ -norm by $\|\mathbf{x}\|_\infty = \max_i |x_i|$. We define $\mathbf{x}^{\otimes 2} := \mathbf{x}\mathbf{x}^\top$. We define the operator norm of a matrix A as $\|A\|_{\text{op}} := \sup_{\|\mathbf{x}\| \leq 1} \|A\mathbf{x}\|$. For two matrices $A, B \in \mathbb{R}^{d \times d}$, we say $A \preceq B$ if $B - A$ is positive semi-definite. We denote the identity matrix in $\mathbb{R}^{d \times d}$ by I_d . For a twice continuously differentiable function $f : \mathbb{R}^d \rightarrow \mathbb{R}$, let ∇f , $\nabla^2 f$, and Δf denote its gradient, Hessian, and Laplacian, respectively. For a probability density function π and a measurable function $f : \mathbb{R}^d \rightarrow \mathbb{R}$, we define the $L^2(\pi)$ -norm of f as $\|f\|_{L^2(\pi)} := (\int (f(\mathbf{x}))^2 \pi(\mathbf{x}) d\mathbf{x})^{1/2}$. We define $L^\infty(K)$ -norm as $\|f\|_{L^\infty(K)} := \sup_{\mathbf{x} \in K} |f(\mathbf{x})|$. The function composition operation is marked as $g \circ f := g(f(x))$ for functions f and g . We use the asymptotic notation $f(x) = \mathcal{O}(g(x))$ to denote the statement that $f(x) \leq Cg(x)$ for some constant $C > 0$ and $\tilde{\mathcal{O}}(\cdot)$ to ignore the logarithm. For a vector function $\mathbf{v} : \mathbb{R}^d \rightarrow \mathbb{R}^{d'}$, we define its $L^2(\pi)$ -norm as $\|\mathbf{v}\|_{L^2(\pi)} := \|\|\mathbf{v}\|\|_{L^2(\pi)}$ and $L^\infty(K)$ -norm as $\|\mathbf{v}\|_{L^\infty(K)} := \|\|\mathbf{v}\|\|_{L^\infty(K)}$. For any dataset $\mathcal{D} = \{\mathbf{x}_i\}_{i=1}^n$, we define the image of \mathcal{D} under \mathbf{v} as $\mathbf{v}(\mathcal{D}) := \{\mathbf{v}(\mathbf{x}_i)\}_{i=1}^n$. Given two distributions μ and ν , the Wasserstein-2 distance is defined as $W_2(\mu, \nu) := \inf_{\pi \in \Pi(\mu, \nu)} \mathbb{E}_{(x, y) \sim \pi} [\|x - y\|^2]^{1/2}$, where $\Pi(\mu, \nu)$ is the set of all couplings of μ and ν . A coupling is a joint distribution on $\mathbb{R}^d \times \mathbb{R}^d$ whose marginals are

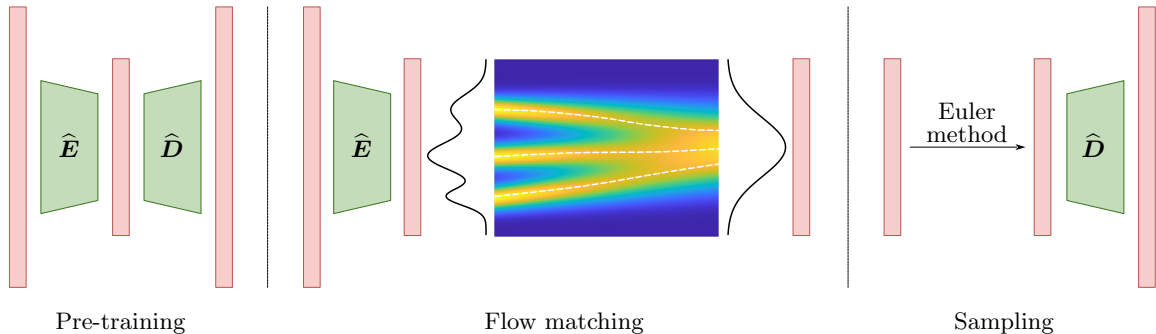


Figure 1: An illustration of our framework. Pre-training: Based on m samples $\mathcal{Y} = \{\mathbf{y}_i\}_{i=1}^m$ drawn i.i.d. from pre-trained data distribution $\tilde{\gamma}_1$, we minimize the empirical reconstruction loss to obtain an encoder $\hat{\mathbf{E}} : [0, 1]^D \rightarrow [0, 1]^d$ and the corresponding decoder $\hat{\mathbf{D}} : [0, 1]^d \rightarrow \mathbb{R}^D$. These will serve as the bridge linking the high-dimensional input space and the low-dimensional latent space. Flow matching: For the target distribution γ_1 and n samples $\mathcal{X} = \{\mathbf{x}_i\}_{i=1}^n$ drawn from it, the encoder $\hat{\mathbf{E}}$ maps them to the latent space with $\pi_1 = \hat{\mathbf{E}}_{\#}\gamma_1$ and $\hat{\mathbf{E}}(\mathcal{X}) = \{\hat{\mathbf{E}}(\mathbf{x}_i)\}_{i=1}^n$. Flow matching is then applied within the latent space, where a transformer network is trained to predict the velocity field of the transformation from a standard normal distribution $\pi_0 = \mathcal{N}(0, I_d)$ to the target latent distribution π_1 . Sampling: Given the estimated velocity field, we can generate samples from an approximation of the continuous flow ODE starting from the prior distribution π_0 . The generated latent data distribution $\hat{\pi}_T$ will be mapped back to the high-dimensional space by the decoder $\hat{\mathbf{D}}$, resulting in the generated data distribution $\hat{\gamma}_T = \hat{\mathbf{D}}_{\#}\hat{\pi}_T$.

μ and ν on first and second factors, respectively. Let $\mathbf{f} : \mathbb{R}^d \rightarrow \mathbb{R}^{d'}$ be a measurable mapping and μ be a probability measure on \mathbb{R}^d . The push-forward measure $\mathbf{f}_{\#}\mu$ of a measurable set K is defined as $\mathbf{f}_{\#}\mu := \mu(\mathbf{f}^{-1}(K))$. In neural networks, the Rectified Linear Unit (ReLU) activation function is denoted by $\sigma(x) = \max\{x, 0\}$ and is applied element-wise to vectors or matrices. We define the hardmax operator as $\sigma_H(\mathbf{x}) := \lim_{c \rightarrow +\infty} \exp(c\mathbf{x}) / \|\exp(c\mathbf{x})\|_1$, where the operation is performed column-wise if the input to σ_H is a matrix. The Hadamard product \odot refers to the element-wise multiplication of two vectors or matrices of the same dimensions.

2.1 Transformer networks

In the last few years, academic inquiry has concentrated on the approximation power and generalization capability of ReLU neural networks (Yarotsky, 2017; Suzuki, 2019; Bartlett et al., 2019; Yarotsky and Zhevnerchuk, 2020; Schmidt-Hieber, 2020; Lu et al., 2021; Shen et al., 2022). These networks become the preferred choice for theoretical analysis and are able to achieve the minimax optimal rate in many problems (Huang et al., 2022; Duan et al., 2022; Jiao et al., 2023; Oko et al., 2023; Liu et al., 2024b). In contrast, the theoretical understanding of transformer networks remains limited, despite their resounding success in practical applications. Gurevych et al. (2022) recently provided a framework to study the

approximation properties and generalization abilities of transformer networks. We adopt their framework and extend it by incorporating control over the regularity of the neural network functions.

Given $d, d' \in \mathbb{N}$, we define a transformer network $\phi : \mathbb{R}^d \rightarrow \mathbb{R}^{d'}$ as follows:

$$\phi = E_{out} \circ F_N^{(FF)} \circ F_N^{(SA)} \circ \dots \circ F_1^{(FF)} \circ F_1^{(SA)} \circ E_{in} \circ P. \quad (1)$$

The first layer of the transformer network P , known as "patchify", divides the spatial input into patches. Namely, an input \mathbf{x} of dimension d is transformed into a sequence X of l tokens, where each token has a dimension of d_{patch} . These tokens are explicitly selected from components of the input, thus this layer does not require training. For simplicity, we assume $d = d_{patch} \times l$.

The input embedding layer $E_{in} : \mathbb{R}^{(d_{patch}+l) \times l} \rightarrow \mathbb{R}^{d_{model} \times l}$, incorporating position encoding, is a token-wise linear mapping:

$$Z_0 = E_{in} \left(\text{Concat} \begin{pmatrix} X \\ \mathbb{1}_l \end{pmatrix} \right) = A_{in} \begin{pmatrix} X \\ \mathbb{1}_l \end{pmatrix} + \mathbf{b}_{in} \mathbb{1}_l^\top \quad (2)$$

where $A_{in} \in \mathbb{R}^{d_{model} \times (d_{patch}+l)}$ and $\mathbf{b}_{in} \in \mathbb{R}^{d_{model}}$ represent the weight matrix and bias vector of the embedding layer, and $\mathbb{1}_l$ denotes a vector of l components, each of which is 1.

The multi-head attention layer $F^{(SA)} : \mathbb{R}^{d_{model} \times l} \rightarrow \mathbb{R}^{d_{model} \times l}$ represents the interaction among tokens:

$$F^{(SA)}(Z) = Z + \sum_{s=1}^h W_{O,s} (W_{V,s} Z) \left[\left((W_{K,s} Z)^\top (W_{Q,s} Z) \right) \odot \sigma_H \left((W_{K,s} Z)^\top (W_{Q,s} Z) \right) \right] \quad (3)$$

where $h \in \mathbb{N}$ is the number of heads which we compute in parallel, $d_k \in \mathbb{N}$ is the dimension of the queries and keys, $d_v \in \mathbb{N}$ is the dimension of the values, $d_{model} = h \cdot d_v$, $W_{K,s}, W_{Q,s} \in \mathbb{R}^{d_k \times d_{model}}$, $W_{V,s} \in \mathbb{R}^{d_v \times d_{model}}$ and $W_{O,s} \in \mathbb{R}^{d_{model} \times d_v}$ are the weight matrices, and σ_H is the hardmax operator. We include a skip-connection in the attention layer.

The token-wise feedforward neural network $F^{(FF)} : \mathbb{R}^{d_{model} \times l} \rightarrow \mathbb{R}^{d_{model} \times l}$ processes each token independently in parallel by applying two feedforward layers:

$$F^{(FF)}(Y) = Y + W_2 \sigma(W_1 Y + \mathbf{b}_1 \mathbb{1}_l^\top) + \mathbf{b}_2 \mathbb{1}_l^\top$$

where $d_{ff} \in \mathbb{N}$ denotes the hidden layer size of the feedforward layer, $W_1 \in \mathbb{R}^{d_{ff} \times d_{model}}$, $\mathbf{b}_1 \in \mathbb{R}^{d_{ff}}$, $W_2 \in \mathbb{R}^{d_{model} \times d_{ff}}$ and $\mathbf{b}_2 \in \mathbb{R}^{d_{model}}$ are parameters, and σ is the ReLU activation function. The feedforward layer also includes a skip-connection.

The output embedding $E_{out} : \mathbb{R}^{d_{model} \times l} \rightarrow \mathbb{R}^{d'}$,

$$E_{out}(Z) = A_{out} \mathbf{z}_1 + \mathbf{b}_{out}$$

where $Z = (\mathbf{z}_1, \mathbf{z}_2, \dots, \mathbf{z}_l)$, and $A_{out} \in \mathbb{R}^{d' \times d_{model}}$ and $\mathbf{b}_{out} \in \mathbb{R}^{d'}$ are the weight matrix and bias vector. It is important to highlight that only the first column of Z , specifically the first token, is used.

Based on the definitions provided, we configure the transformer networks as follows:

$$\begin{aligned}
 \mathcal{T}_{d,d'}(N, h, d_k, d_v, d_{ff}, B, J, \gamma) = & \left\{ \phi : \mathbb{R}^d \rightarrow \mathbb{R}^{d'} : \phi \text{ in the form of (1), } \sup_{\mathbf{x}} \|\phi(\mathbf{x})\| \leq B, \right. \\
 & \|\phi(\mathbf{x}_1) - \phi(\mathbf{x}_2)\| \leq \gamma \|\mathbf{x}_1 - \mathbf{x}_2\| \text{ for } \mathbf{x}_1, \mathbf{x}_2 \in [0, 1]^d, \\
 & \sum_{r=1}^N \sum_{s=1}^h (\|W_{Q,r,s}\|_0 + \|W_{K,r,s}\|_0 + \|W_{V,r,s}\|_0 + \|W_{O,r,s}\|_0) \\
 & + \sum_{r=1}^N (\|W_{r,1}\|_0 + \|\mathbf{b}_{r,1}\|_0 + \|W_{r,2}\|_0 + \|\mathbf{b}_{r,2}\|_0) \\
 & \left. + \|A_{in}\|_0 + \|\mathbf{b}_{in}\|_0 + \|A_{out}\|_0 + \|\mathbf{b}_{out}\|_0 \leq J \right\}, \tag{4}
 \end{aligned}$$

where $\|\cdot\|_0$ denotes the number of nonzero entries. In the absence of confusion, we write the defined transformer network class as $\mathcal{T}_{d,d'}$ for brevity. In later sections, we will take networks based on (4) with appropriate configuration parameters.

Remark 1 *Compared to the classical transformer architecture (Vaswani et al., 2017; Yun et al., 2019; Dosovitskiy et al., 2020), our transformer networks have a similar structure, with differences primarily in the multi-head attention layer. We would like to point out that our definition of the multi-head attention layer (3) is an equivalent reformulation of Gurevych et al. (2022) and Kohler and Krzyzak (2023), where they concatenate attention heads. While there are similarities in framework, our approach and focus differ from the aforementioned work. We have incorporated control over the regularity of functions, which is necessary for subsequent analyses in flow matching and autoencoders. Some research concerns the properties of hard attention, which involves replacing the softmax function in the standard attention layer with a hardmax (Pérez et al., 2021; Hao et al., 2022). Our attention layer, in comparison to hard attention, possesses optimization advantages, owing to the continuity and almost everywhere differentiability of the function $\mathbf{x} \odot \sigma_H(\mathbf{x})$.*

To measure the complexity of transformer network class from a learning theory perspective, we introduce the following notions for a real-valued function class.

Definition 2 (Pseudo-dimension) *Let \mathcal{H} be a class of real-valued functions defined on Ω . The pseudo-dimension of \mathcal{H} , denoted by $\text{Pdim}(\mathcal{H})$, is the largest integer N for which there exist points $x_1, \dots, x_N \in \Omega$ and constants $y_1, \dots, y_N \in \mathbb{R}$ such that*

$$|\{\text{sgn}(h(x_1) - y_1), \dots, \text{sgn}(h(x_N) - y_N) : h \in \mathcal{H}\}| = 2^N.$$

Definition 3 (Covering number) *Let ρ be a pseudo-metric on \mathcal{M} and $S \subseteq \mathcal{M}$. For any $\delta > 0$, a set $A \subseteq \mathcal{M}$ is called a δ -covering of S if for any $x \in S$ there exists $y \in A$ such that $\rho(x, y) \leq \delta$. The δ -covering number of S , denoted by $\mathcal{N}(\delta, S, \rho)$, is the minimum cardinality of any δ -covering of S .*

Next, we introduce the notion of regularity for a function. For a multi-index $\boldsymbol{\alpha} = (\alpha_1, \dots, \alpha_d)$, the monomial on $\boldsymbol{x} = (x_1, \dots, x_d)$ is denoted by $\boldsymbol{x}^\alpha := x_1^{\alpha_1} \cdots x_d^{\alpha_d}$, the $\boldsymbol{\alpha}$ -derivative of a real-valued function ϕ is denoted by $\partial^\alpha \phi := \partial^{|\boldsymbol{\alpha}|} \phi / \partial x_1^{\alpha_1} \cdots \partial x_d^{\alpha_d}$ with $\|\boldsymbol{\alpha}\|_1 = \sum_{i=1}^d \alpha_i$ as the usual 1-norm for vectors. We use the convention that $\partial^\alpha \phi := \phi$ if $\|\boldsymbol{\alpha}\|_1 = 0$.

Definition 4 (Lipschitz functions) Let $\Omega \subseteq \mathbb{R}^d$ and $\phi : \Omega \rightarrow \mathbb{R}^{d'}$, the Lipschitz constant of ϕ is denoted by

$$\text{Lip}(\phi) := \sup_{\boldsymbol{x}, \boldsymbol{y} \in \Omega, \boldsymbol{x} \neq \boldsymbol{y}} \frac{\|\phi(\boldsymbol{x}) - \phi(\boldsymbol{y})\|}{\|\boldsymbol{x} - \boldsymbol{y}\|}.$$

Definition 5 (Hölder classes) Let $\Omega \subseteq \mathbb{R}^d$ and $\beta > 0$. A function is said to possess β -Hölder smoothness if all its partial derivatives up to order $\lfloor \beta \rfloor$ exist and are bounded, and the partial derivatives of order $\lfloor \beta \rfloor$ are $\beta - \lfloor \beta \rfloor$ Hölder. For $d, d' \in \mathbb{N}$, the Hölder class with smoothness index β and norm constraint parameter K is then defined as

$$\mathcal{H}_{d,d'}^\beta(\Omega, K) = \left\{ \boldsymbol{f} = (f_1, \dots, f_{d'})^\top : \Omega \rightarrow \mathbb{R}^{d'}, \sum_{\boldsymbol{n}: \|\boldsymbol{n}\|_1 < \beta} \|\partial^\boldsymbol{n} f_k\|_{L^\infty(\Omega)} + \sum_{\boldsymbol{n}: \|\boldsymbol{n}\|_1 = \lfloor \beta \rfloor} \sup_{\boldsymbol{x}, \boldsymbol{y} \in \Omega, \boldsymbol{x} \neq \boldsymbol{y}} \frac{|\partial^\boldsymbol{n} f_k(\boldsymbol{x}) - \partial^\boldsymbol{n} f_k(\boldsymbol{y})|}{\|\boldsymbol{x} - \boldsymbol{y}\|^{\beta - \lfloor \beta \rfloor}} \leq K, \quad k = 1, \dots, d' \right\}.$$

Definition 6 (Differentiability classes) Let $\Omega \subseteq \mathbb{R}^d$ and $m \in \mathbb{N}$. For $d, d' \in \mathbb{N}$, the differentiability class with smoothness index m and norm constraint parameter K is defined as

$$\mathcal{C}_{d,d'}^m(\Omega, K) = \left\{ \boldsymbol{f} = (f_1, \dots, f_{d'})^\top : \Omega \rightarrow \mathbb{R}^{d'}, \sum_{\boldsymbol{n}: \|\boldsymbol{n}\|_1 \leq m} \|\partial^\boldsymbol{n} f_k\|_{L^\infty(\Omega)} \leq K, \quad k = 1, \dots, d' \right\}.$$

2.2 Pre-training

For any measurable functions $\boldsymbol{E} : \mathbb{R}^D \rightarrow \mathbb{R}^d$ and $\boldsymbol{D} : \mathbb{R}^d \rightarrow \mathbb{R}^D$, we minimize the reconstruction loss w.r.t. the pre-trained data distribution $\tilde{\gamma}_1$

$$(\boldsymbol{D}^*, \boldsymbol{E}^*) \in \arg \min_{\boldsymbol{D}, \boldsymbol{E} \text{ measurable}} \mathcal{R}(\boldsymbol{D}, \boldsymbol{E}) := \int_{\mathbb{R}^d} \|(\boldsymbol{D} \circ \boldsymbol{E})(\boldsymbol{y}) - \boldsymbol{y}\|^2 d\tilde{\gamma}_1.$$

Our analysis on pre-training requires the following assumptions.

Assumption 1 (Bounded support) The pre-trained data distribution $\tilde{\gamma}_1$ is supported on $[0, 1]^D$.

Assumption 2 (Compressibility) There exist continuously differentiable functions $\boldsymbol{E}^* : [0, 1]^D \rightarrow [0, 1]^d$ and $\boldsymbol{D}^* : [0, 1]^d \rightarrow \mathbb{R}^D$ such that $\mathcal{R}(\boldsymbol{D}, \boldsymbol{E})$ attains its minimum. The minimum value is denoted by $\varepsilon_{\tilde{\gamma}_1} := \mathcal{R}(\boldsymbol{D}^*, \boldsymbol{E}^*)$. Furthermore, $\boldsymbol{E}^* \in \mathcal{C}_{D,d}^1([0, 1]^D, K_{\boldsymbol{E}})$, $\boldsymbol{D}^* \in \mathcal{C}_{d,D}^1([0, 1]^d, K_{\boldsymbol{D}})$.

Remark 7 *The restriction on the range of the image of \mathbf{E}^* in Assumption 2 is not essential. Since \mathbf{E}^* is a continuous function, there exists a constant $R > 0$ such that $\mathbf{E}^*([0, 1]^D) \subseteq [-R, R]^d$. Let $\tilde{\mathbf{E}}^*(\mathbf{y}) := \frac{1}{2R}\mathbf{E}^*(\mathbf{y}) + \frac{1}{2}\mathbf{1}_d$ and $\tilde{\mathbf{D}}^*(\mathbf{y}) := \mathbf{D}^*(2R\mathbf{y} - R\mathbf{1}_d)$. Then $\mathcal{R}(\mathbf{D}, \mathbf{E}) = \mathcal{R}(\tilde{\mathbf{D}}^*, \tilde{\mathbf{E}}^*)$ and $\tilde{\mathbf{E}}^*([0, 1]^D) \subseteq [0, 1]^d$. Therefore, it is permissible to assume, without loss of generality, $\mathbf{E}^*([0, 1]^D) \subseteq [0, 1]^d$ and $\mathbf{D}^* : [0, 1]^d \rightarrow \mathbb{R}^D$.*

Assumption 3 (Bounded support) *The target distribution γ_1 is supported on $[0, 1]^D$.*

We denote the domain shift between the pre-trained data distribution $\tilde{\gamma}_1$ and the target distribution γ_1 in Wasserstein-2 distance as $\varepsilon_{\tilde{\gamma}_1, \gamma_1} := W_2(\tilde{\gamma}_1, \gamma_1)$. In our analysis, \mathbf{E}^* and \mathbf{D}^* are approximated by neural networks. By constraining the chosen encoder network $\hat{\mathbf{E}} : [0, 1]^D \rightarrow [0, 1]^d$, Assumption 3 implies that the latent target distribution $\pi_1 := \hat{\mathbf{E}}_{\#}\gamma_1$ is supported on $[0, 1]^d$.

2.3 Flow matching

Given independent empirical observations of $X_0 \sim \pi_0$ and $X_1 \sim \pi_1$, we want to find an ODE on time $t \in [0, 1]$,

$$dZ_t = \mathbf{v}(Z_t, t) dt,$$

which converts Z_0 from π_0 to Z_1 following π_1 . A line of research points out that the vector field can be found by solving a least square regression problem

$$\min_{\mathbf{v}} \int_0^1 \mathbb{E}_{X_0, X_1} \left[\left\| \left(X_1 - \frac{t}{\sqrt{1-t^2}} X_0 \right) - \mathbf{v}(X_t, t) \right\|^2 \right] dt \quad (5)$$

with $X_t = tX_1 + \sqrt{1-t^2}X_0$, where $X_0 \sim \pi_0, X_1 \sim \pi_1$, and X_t is the interpolation between X_0 and X_1 . The exact minimum of (5) is achieved by

$$\mathbf{v}^*(\mathbf{x}, t) = \mathbb{E}_{X_0, X_1} \left[X_1 - \frac{t}{\sqrt{1-t^2}} X_0 \middle| X_t = \mathbf{x} \right]. \quad (6)$$

In practice, the velocity field \mathbf{v}^* is approximated by neural networks. To avoid instability, we often clip the interval $[0, 1]$ with T . Namely, we consider the truncated loss function

$$\min_{\mathbf{v}} \mathcal{L}(\mathbf{v}) := \frac{1}{T} \int_0^T \mathbb{E}_{X_0, X_1} \left[\left\| \left(X_1 - \frac{t}{\sqrt{1-t^2}} X_0 \right) - \mathbf{v}(X_t, t) \right\|^2 \right] dt \quad (7)$$

with $X_t = tX_1 + \sqrt{1-t^2}X_0$.

3 Approximation

This section examines the approximation error involved in estimating the true velocity field. To begin with, we explore the approximation capabilities of transformer networks with constrained Lipschitz constants, as detailed in the following theorems.

Theorem 8 *Let $0 < \varepsilon < 1$ and $\beta > 0$. For any function $\mathbf{f} \in \mathcal{H}_{d,d'}^\beta([0, 1]^d, K)$, there exists a transformer network $\phi \in \mathcal{T}_{d,d'}(N, h, d_k, d_v, d_{ff}, B, J, \gamma)$, where*

$$N = \mathcal{O}\left(\log\left(\frac{K}{\varepsilon}\right)\right), \quad h = \mathcal{O}\left(\left(\frac{K}{\varepsilon}\right)^{d/\beta}\right), \quad d_{ff} = 8h, \quad d_k = \mathcal{O}(1), \quad d_v = \mathcal{O}(1)$$

$$B = \mathcal{O}\left(\|\mathbf{f}\|_{L^\infty([0,1]^d)}\right), \quad J = \mathcal{O}\left(\left(\frac{K}{\varepsilon}\right)^{d/\beta} \log\left(\frac{K}{\varepsilon}\right)\right),$$

such that

$$\|\phi(\mathbf{x}) - \mathbf{f}(\mathbf{x})\|_{L^\infty([0,1]^d)} \leq \varepsilon.$$

Furthermore, if $\beta > 1$, we may choose

$$\gamma = \mathcal{O}(K).$$

Theorem 9 *Let $0 < \varepsilon < 1$ and $m \in \mathbb{N}$. For any function $\mathbf{f} \in \mathcal{C}_{d,d'}^m([0, 1]^d, K)$, there exists a transformer network $\phi \in \mathcal{T}_{d,d'}(N, h, d_k, d_v, d_{ff}, B, J, \gamma)$, where*

$$N = \mathcal{O}\left(\log\left(\frac{K}{\varepsilon}\right)\right), \quad h = \mathcal{O}\left(\left(\frac{K}{\varepsilon}\right)^{d/m}\right), \quad d_{ff} = 8h, \quad d_k = \mathcal{O}(1), \quad d_v = \mathcal{O}(1)$$

$$B = \mathcal{O}\left(\|\mathbf{f}\|_{L^\infty([0,1]^d)}\right), \quad J = \mathcal{O}\left(\left(\frac{K}{\varepsilon}\right)^{d/m} \log\left(\frac{K}{\varepsilon}\right)\right),$$

such that

$$\|\phi(\mathbf{x}) - \mathbf{f}(\mathbf{x})\|_{L^\infty([0,1]^d)} \leq \varepsilon.$$

Furthermore, if $m \geq 1$, we may choose

$$\gamma = \mathcal{O}(K).$$

The proof of Theorem 8 and Theorem 9 can be found in Appendix A.3.

Remark 10 *Theorem 8 and Theorem 9 provide theoretical guarantees for the approximation capabilities of transformer networks with constrained Lipschitz constants. To effectively control the Lipschitz constants of networks in practical applications, various methods are employed, including spectral normalization (Miyato et al., 2018), batch normalization (Ioffe and Szegedy, 2015), weight clipping (Arjovsky et al., 2017), gradient clipping (LeCun et al., 2015), and gradient penalty (Gulrajani et al., 2017).*

Remark 11 *Theorem 8 and Theorem 9 improve the approximation guarantee in Gurevych et al. (2022, Theorem 2) with additional Lipschitz continuity characterization. Huang et al. (2022) introduced control over Lipschitz continuity for ReLU neural networks. Chen et al. (2020a, Lemma 10) shows that ReLU neural networks can approximate Lipschitz continuous functions, while the Lipschitz continuity of the network remains independent of*

the approximation error. Their approach, contingent upon the structure of ReLU networks, is applicable solely to Lipschitz continuous target functions. We would like to highlight that we use a distinct proof method, enabling the Lipschitz continuity of the constructed transformer network to be independent of approximation error, while remaining applicable to target functions with higher regularity.

We proceed to show that although the spatial input \mathbf{x} in (6) can be arbitrary in \mathbb{R}^d , by restricting \mathbf{x} to a compact set, the true velocity field \mathbf{v}^* can be effectively approximated. In our approach, we introduce time t as an extra input dimension to the neural network and define the rescaled function space as

$$\begin{aligned} \mathcal{T}(N, h, d_k, d_v, d_{ff}, B, J, \gamma_{\mathbf{x}}, \gamma_t, R) = & \left\{ \mathbf{v}(\mathbf{x}, t) = \tilde{\mathbf{v}} \left(\frac{1}{2R} (\text{Proj}_{[-R, R]^d}(\mathbf{x}) + R\mathbf{1}_d), \frac{1}{T}t \right) : \right. \\ & \tilde{\mathbf{v}}(\mathbf{x}', t') \in \mathcal{T}_{d+1, d}(N, h, d_k, d_v, d_{ff}, B, J, \gamma), \\ & \left. \gamma_{\mathbf{x}} = \frac{\gamma}{2R}, \gamma_t = \frac{\gamma}{T} \right\}, \end{aligned} \quad (8)$$

where $\text{Proj}_{\Omega}(\mathbf{x}) := \arg \min_{\mathbf{y} \in \Omega} \|\mathbf{y} - \mathbf{x}\|$ denotes the projection operator onto the set Ω . This definition ensures that $\mathbf{v} \in \mathcal{T}(N, h, d_k, d_v, d_{ff}, B, J, \gamma_{\mathbf{x}}, \gamma_t, R)$ is Lipschitz continuous over $\mathbb{R}^d \times [0, T]$, i.e.

$$\begin{aligned} \|\mathbf{v}(\mathbf{x}_1, t) - \mathbf{v}(\mathbf{x}_2, t)\| & \leq \gamma_{\mathbf{x}} \|\mathbf{x}_1 - \mathbf{x}_2\| \text{ for any } t \in [0, T], \\ \|\mathbf{v}(\mathbf{x}, t_1) - \mathbf{v}(\mathbf{x}, t_2)\| & \leq \gamma_t |t_1 - t_2| \text{ for any } \mathbf{x} \in \mathbb{R}^d. \end{aligned}$$

Corollary 12 *Suppose Assumption 3 holds. Let $\frac{1}{2} < T < 1$ and $R \geq 1$. Given an approximation error $0 < \varepsilon < 1$, for any velocity field \mathbf{v}^* , we choose the hypothesis class \mathcal{T} with*

$$\begin{aligned} N & = \mathcal{O} \left(\log \left(\frac{R}{(1-T)^3 \varepsilon} \right) \right), \quad h = \mathcal{O} \left(\left(\frac{R}{(1-T)^3 \varepsilon} \right)^{d+1} \right), \quad d_{ff} = 8h, \\ d_k & = \mathcal{O}(1), \quad d_v = \mathcal{O}(1), \quad B = \mathcal{O} \left(\frac{R}{1-T} \right), \quad J = \mathcal{O} \left(\left(\frac{R}{(1-T)^3 \varepsilon} \right)^{d+1} \log \left(\frac{R}{(1-T)^3 \varepsilon} \right) \right), \\ \gamma_{\mathbf{x}} & = \mathcal{O} \left(\frac{1}{(1-T)^3} \right), \quad \gamma_t = \mathcal{O} \left(\frac{R}{(1-T)^3} \right). \end{aligned}$$

Then there exists a $\mathbf{v}(\mathbf{x}, t) \in \mathcal{T}$ such that

$$\|\mathbf{v}(\mathbf{x}, t) - \mathbf{v}^*(\mathbf{x}, t)\|_{L^\infty([-R, R]^d \times [0, T])} \leq \varepsilon.$$

The proof can be found in Appendix A.4.

4 Generalization and Sampling

In this section, we consider the generalization error of estimating the velocity field and establish distribution recovery guarantees using the estimated velocity field. We begin with the following connection between the loss function $\mathcal{L}(\mathbf{v})$ and the L^2 approximation error $\|\mathbf{v}(\cdot, t) - \mathbf{v}^*(\cdot, t)\|_{L^2(\pi_t)}$.

Lemma 13 For any velocity field $\mathbf{v} : \mathbb{R}^d \times [0, T] \rightarrow \mathbb{R}^d$, we have

$$\mathcal{L}(\mathbf{v}) - \mathcal{L}(\mathbf{v}^*) = \frac{1}{T} \int_0^T \|\mathbf{v}(\cdot, t) - \mathbf{v}^*(\cdot, t)\|_{L^2(\pi_t)}^2 dt.$$

The proof can be found in Appendix B.1. According to Lemma 13, minimizing (7) is equivalent to minimizing the difference between the network and the true velocity field in $L^2(\pi_t)$ -norm.

In this paper, we choose the standard Gaussian distribution as the prior distribution, i.e., $\pi_0 = \mathcal{N}(0, I_d)$, where d is the dimension of the latent space. Given n independent and identically distributed (i.i.d.) samples $\{\mathbf{x}_{1,i}\}_{i=1}^n$ from π_1 , and n i.i.d. samples $\{(t_i, \mathbf{x}_{0,i})\}_{i=1}^n$ from $\text{Unif}[0, T]$ and π_0 , which are cheap to generate, we denote the dataset as $\mathcal{X} := \{t_i, \mathbf{x}_{0,i}, \mathbf{x}_{1,i}\}_{i=1}^n$ and consider the empirical risk minimization

$$\hat{\mathbf{v}} \in \arg \min_{\mathbf{v} \in \mathcal{T}} \hat{\mathcal{L}}(\mathbf{v}) := \frac{1}{n} \sum_{i=1}^n \left\| \mathbf{x}_{1,i} - \frac{t_i}{\sqrt{1-t_i^2}} \mathbf{x}_{0,i} - \mathbf{v} \left(t_i \mathbf{x}_{1,i} + \sqrt{1-t_i^2} \mathbf{x}_{0,i}, t_i \right) \right\|^2. \quad (9)$$

Our analysis gives the following generalization bound.

Theorem 14 Suppose Assumption 3 holds. Let $\frac{1}{2} < T < 1$. For any velocity field \mathbf{v}^* , given n i.i.d. samples $\mathcal{X} = \{t_i, \mathbf{x}_{0,i}, \mathbf{x}_{1,i}\}_{i=1}^n$ from $\text{Unif}[0, T]$, π_0 and π_1 , we choose \mathcal{T} as in Corollary 12 with $\varepsilon = n^{-\frac{1}{d+3}}$ and $R = \mathcal{O}(\sqrt{\log n})$. Then it holds

$$\mathbb{E}_{\mathcal{X}} [\mathcal{L}(\hat{\mathbf{v}}) - \mathcal{L}(\mathbf{v}^*)] = \mathbb{E}_{\mathcal{X}} \left[\frac{1}{T} \int_0^T \|\hat{\mathbf{v}}(\cdot, t) - \mathbf{v}^*(\cdot, t)\|_{L^2(\pi_t)}^2 dt \right] = \tilde{\mathcal{O}} \left(\frac{1}{(1-T)^{3d+5}} n^{-\frac{2}{d+3}} \right),$$

where we omit factors in $d, \log n, \log(1-T)$.

The proof can be found in Appendix B.1. Theorem 14 becomes vacuous when T tends to 1 with fixed sample size n . This is a consequence of the blowup of the velocity field $\mathbf{v}^*(\mathbf{x}, t)$ as t tends to 1. Although a smaller early stopping time leads to better generalization error, stopping the sampling process at an early time results in a bad distribution recovery.

Given the estimated velocity field $\hat{\mathbf{v}}$, we can generate samples from an approximation of the continuous flow ODE starting from the prior distribution:

$$d\tilde{X}_t(\mathbf{x}) = \hat{\mathbf{v}}(\tilde{X}_t(\mathbf{x}), t) dt, \quad \tilde{X}_0(\mathbf{x}) = \mathbf{x} \sim \pi_0, \quad 0 \leq t \leq T. \quad (10)$$

In practice, we need to use a discrete-time approximation for the sampling dynamics (10). Let $0 = t_0 < t_1 < \dots < t_N = T$ be the discretization points. We consider the explicit Euler discretization scheme:

$$d\hat{X}_t(\mathbf{x}) = \hat{\mathbf{v}}(\hat{X}_{t_k}(\mathbf{x}), t_k) dt, \quad t \in [t_k, t_{k+1}),$$

for $k = 0, 1, \dots, N-1$ and $\hat{X}_0(\mathbf{x}) = \mathbf{x} \sim \pi_0$. We denote the distribution of $\hat{X}_T(\mathbf{x})$ by $\hat{\pi}_T$.

Theorem 15 *Suppose Assumption 3 holds. Given n samples from latent target distribution π_1 and the networks as in Corollary 12, we use the estimated velocity field in (9) to generate samples. By choosing the maximal step size $\max_{k=0,1,\dots,N-1} |t_{k+1} - t_k| = \mathcal{O}(n^{-\frac{1}{d+3}})$ and the early stopping time $T(n) = 1 - (\log n)^{-1/6}$, we achieve*

$$\mathbb{E}_{\mathcal{X}}[W_2(\widehat{\pi}_T, \pi_1)] \rightarrow 0.$$

The proof can be found in Appendix C.2. Theorem 15 demonstrates the consistency of flow matching in latent space. The consistency is mainly based on a mild assumption, i.e. boundedness, which justifies the use of continuous normalizing flows based on flow matching.

5 End-to-end Error Analysis

Data dimension reduction and restoration, serving as key steps in Stable Diffusion (Rombach et al., 2022), are accomplished by an autoencoder network. An autoencoder is a distinct neural network architecture designed to learn the low-dimensional features of data (Ballard, 1987; Bourlard and Kamp, 1988; Kramer, 1991; Hinton and Zemel, 1993). The classical autoencoder typically consists of two subnetworks, an encoder and a decoder. The encoder processes high-dimensional input data into a low-dimensional latent representation, aiming to capture the intrinsic structure of the data in a compact form. The decoder then maps these latent features back to the high-dimensional space, striving to accurately reconstruct the original input. These processes can be summarized by the following model.

Given m samples $\mathcal{Y} := \{\mathbf{y}_i\}_{i=1}^m$ drawn i.i.d. from the pre-trained data distribution $\tilde{\gamma}_1$, we can devise an estimator through empirical risk minimization

$$(\widehat{\mathbf{D}}, \widehat{\mathbf{E}}) \in \arg \min_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \widehat{\mathcal{R}}(\mathbf{D}, \mathbf{E}) := \frac{1}{m} \sum_{i=1}^m \|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}_i) - \mathbf{y}_i\|^2, \quad (11)$$

where we specify the encoder network architecture as

$$\mathcal{E} = \mathcal{T}_{D,d}(N_{\mathbf{E}}, h_{\mathbf{E}}, d_{\mathbf{E},k}, d_{\mathbf{E},v}, d_{\mathbf{E},ff}, B_{\mathbf{E}}, J_{\mathbf{E}}, \gamma_{\mathbf{E}}) \quad (12)$$

and the decoder network architecture as

$$\mathcal{D} = \mathcal{T}_{d,D}(N_{\mathbf{D}}, h_{\mathbf{D}}, d_{\mathbf{D},k}, d_{\mathbf{D},v}, d_{\mathbf{D},ff}, B_{\mathbf{D}}, J_{\mathbf{D}}, \gamma_{\mathbf{D}}). \quad (13)$$

Lemma 16 *Suppose Assumption 1 and 2 hold. Given m samples from pre-trained data distribution $\tilde{\gamma}_1$, we choose*

$$\begin{aligned} N_{\mathbf{E}} &= \mathcal{O}(\log(K_{\mathbf{E}}m)), & h_{\mathbf{E}} &= \mathcal{O}\left(K_{\mathbf{E}}^D m^{\frac{D}{D+2}}\right), & d_{\mathbf{E},ff} &= 8h, & d_{\mathbf{E},k} &= \mathcal{O}(1), & d_{\mathbf{E},v} &= \mathcal{O}(1) \\ B_{\mathbf{E}} &= \mathcal{O}(K_{\mathbf{E}}), & J_{\mathbf{E}} &= \mathcal{O}\left(K_{\mathbf{E}}^D m^{\frac{D}{D+2}} \log(K_{\mathbf{E}}m)\right), & \gamma_{\mathbf{E}} &= \mathcal{O}(K_{\mathbf{E}}) \end{aligned}$$

for the encoder networks in (12) and

$$\begin{aligned} N_{\mathbf{D}} &= \mathcal{O}(\log(K_{\mathbf{D}}m)), & h_{\mathbf{D}} &= \mathcal{O}\left(K_{\mathbf{D}}^d m^{\frac{d}{D+2}}\right), & d_{\mathbf{D},ff} &= 8h, & d_{\mathbf{D},k} &= \mathcal{O}(1), & d_{\mathbf{D},v} &= \mathcal{O}(1) \\ B_{\mathbf{D}} &= \mathcal{O}(K_{\mathbf{D}}), & J_{\mathbf{D}} &= \mathcal{O}\left(K_{\mathbf{D}}^d m^{\frac{d}{D+2}} \log(K_{\mathbf{D}}m)\right), & \gamma_{\mathbf{D}} &= \mathcal{O}(K_{\mathbf{D}}) \end{aligned}$$

for the decoder networks in (13). Then it holds

$$\mathbb{E}_{\mathcal{Y}}[\mathcal{R}(\widehat{\mathbf{D}}, \widehat{\mathbf{E}})] - \varepsilon_{\tilde{\gamma}_1} = \mathcal{O}\left(m^{-\frac{1}{D+2}} \log^{5/2} m\right),$$

where \mathcal{O} hides factors in $D, d, K_{\mathbf{E}}, K_{\mathbf{D}}$.

The proof can be found in Appendix D. Theorem 16 provides estimation guarantees for the pre-trained data distribution $\tilde{\gamma}_1$. A line of research (Schonsheck et al., 2019; Liu et al., 2024b,a) relies on the assumption that the data follows $\mathbf{x} = \mathbf{D} \circ \mathbf{E}(\mathbf{x})$ when analyzing autoencoders. The Assumption 2 represents a relaxation of the aforementioned assumption, reverting to the previous case when $\varepsilon_{\tilde{\gamma}_1} = 0$.

With the pre-trained encoder and decoder, we can bridge the original high-dimensional space to the low-dimensional latent space, as illustrated in Figure 1. Denote the distribution of the generated samples as $\widehat{\gamma}_T := \widehat{\mathbf{D}}_{\#} \widehat{\pi}_T$. The following theorem provides estimation guarantees for the target distribution γ_1 .

Theorem 17 (Main result) *Suppose Assumption 1 - 3 hold. Given m samples from the pre-trained distribution $\tilde{\gamma}_1$, we use the pre-trained autoencoder in (11). Given n samples from target distribution γ_1 and the networks as in Theorem 14, we use the estimated velocity field in (9) to generate samples. By choosing the maximal step size $\max_{k=0,1,\dots,N-1} |t_{k+1} - t_k| = \mathcal{O}(n^{-\frac{1}{d+3}})$ and the early stopping time $T(n) = 1 - (\log n)^{-1/6}$, we have*

$$\mathbb{E}_{\mathcal{Y}, \mathcal{X}}[W_2(\widehat{\gamma}_T, \gamma_1)] = \mathcal{O}(\sqrt{\varepsilon_{\tilde{\gamma}_1}} + \varepsilon_{\tilde{\gamma}_1, \gamma_1})$$

when m, n are sufficiently large. Moreover, if $\varepsilon_{\tilde{\gamma}_1} = 0$ and $\varepsilon_{\tilde{\gamma}_1, \gamma_1} = 0$, we have

$$\mathbb{E}_{\mathcal{Y}, \mathcal{X}}[W_2(\widehat{\gamma}_T, \gamma_1)] \rightarrow 0$$

as $m, n \rightarrow \infty$.

The proof can be found in Appendix D. Theorem 17 presents the first convergence analysis incorporating the transformer architecture and pre-training. Our findings indicate that the difference in the distribution of generated samples and the target distribution in Wasserstein-2 distance can be controlled by domain shift and the minimum reconstruction loss achievable by the encoder-decoder architecture. Furthermore, when domain shift is absent and the encoder-decoder architecture can perfectly reconstruct the distribution, the distribution of generated samples converges to the target distribution.

6 Conclusion and Future Work

In this work, we presents a statistical learning theory perspective on continuous normalizing flows based on flow matching. We demonstrate that a Lipschitz transformer network can approximate the true velocity field under L^∞ -norm and provide a sample complexity analysis for estimating the velocity field. Our analysis has identified the bias introduced by the encoder-decoder architecture in estimating the target distribution. Furthermore, we prove

that under mild assumptions, the generated distribution based on flow matching converges to the target data distribution in Wasserstein-2 distance. To the best of our knowledge, we provide the first end-to-end error analysis that considers the transformer architecture and pre-training.

There are several natural directions for future research. Firstly, our analysis can be naturally extended to latent conditional SDE/ODE-based diffusion models, as in (Dao et al., 2023; Peebles and Xie, 2023), where prompts or category information can be incorporated as conditions into the model. Furthermore, with stronger assumptions, there is hope to obtain convergence rates that depend only on d , which can help to overcome the curse of dimensionality. Finally, the existing analysis still cannot fully explain why various designs of attention layers are effective. This is a challenging task because the nonlinearities introduced by complex structures are difficult to handle and analyze. Developing a better understanding of transformer networks is an intriguing direction for future research.

Acknowledgments and Disclosure of Funding

The research of Y. Jiao is supported by the National Nature Science Foundation of China (No.12371441) and supported by “the Fundamental Research Funds for the Central Universities” and by the research fund of KLATASDSMOE of China . The research of Y. Wang is supported by the HK RGC grant 16308518, the HK Innovation Technology Fund Grant ITS/044/18FX and the Guangdong-Hong Kong-Macao Joint Laboratory for Data Driven Fluid Dynamics and Engineering Applications (Project 2020B1212030001). We thank the editor and reviewers for their feedback on our manuscript.

Appendix A. Approximation Error

In this section, we primarily follow the technical proof of the approximation capability of the transformer network by Gurevych et al. (2022). The fundamental idea is that, similar to ReLU networks, the transformer network can implement multiplication, and subsequently, polynomials. Polynomials can sufficiently approximate any continuous function, hence the constructed transformer network can also approximate continuous functions. In contrast to Gurevych et al. (2022), we need the network to maintain Lipschitz continuity. Therefore, we choose polynomials to approximate both the function and its derivative simultaneously. This ensures that the constructed transformer network and the target function not only have minimal differences in their functions, but also in their derivatives, which helps control the Lipschitz constant of the network.

A.1 Input embedding

We follow the construction in Gurevych et al. (2022). For $h \in \mathbb{N}$, we define $d_{model} = h \cdot (d_{patch} + l + 4)$ and

$$\tilde{A}_{in} = \begin{pmatrix} \mathbb{I}_{d_{patch}} & \mathbb{O}_{d_{patch},l} \\ \mathbb{O}_{1,d_{patch}} & \mathbb{O}_{1,l} \\ \mathbb{O}_{l,d_{patch}} & \mathbb{I}_l \\ \mathbb{O}_{3,d_{patch}} & \mathbb{O}_{3,l} \end{pmatrix}, \quad \tilde{\mathbf{b}}_{in} = \begin{pmatrix} \mathbb{O}_{d_{patch}} \\ 1 \\ \mathbb{O}_{l+1} \\ 1 \\ 0 \end{pmatrix}, \quad A_{in} = \begin{pmatrix} \tilde{A}_{in} \\ \vdots \\ \tilde{A}_{in} \end{pmatrix}, \quad \mathbf{b}_{in} = \begin{pmatrix} \tilde{\mathbf{b}}_{in} \\ \vdots \\ \tilde{\mathbf{b}}_{in} \end{pmatrix},$$

where $\mathbb{O}_{m,n}$ denotes a zero matrix with m rows and n columns, and \mathbb{O}_l denotes a zero vector of length l , which satisfies $\|A_{in}\|_0 + \|\mathbf{b}_{in}\|_0 \leq h \cdot (d_{patch} + l + 2)$. Z_0 defined in (2) then satisfies

$$z_{0,j}^{((k-1)(d_{patch}+l+4)+s)} = \begin{cases} x_j^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1,j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ 1 & \text{if } s = d_{patch} + l + 3 \\ 0 & \text{if } s \in \{d_{patch} + l + 2, d_{patch} + l + 4\} \end{cases}$$

for $k \in \{1, \dots, h\}$, $j \in \{1, \dots, l\}$, where $x_j^{(s)}$ denotes the s -th component of the j -th token of X , or in other words, it is the element at the s -th row and j -th column of matrix X . The attention layer and feedforward layer iteratively compute the representations

$$Y_r = F_r^{(SA)}(Z_{r-1}), \quad Z_r = F_r^{(FF)}(Y_r)$$

for $r = 1, \dots, N$.

A.2 Approximation of polynomials with single-head attention

In the case of a transformer network with single-head attention, the embedded input sequence is represented by

$$Z_0 = (z_{0,1}, \dots, z_{0,l}) \in \mathbb{R}^{d_{model} \times l},$$

where $d_{model} = d_{patch} + l + 4$ and

$$z_{0,j}^{(s)} = \begin{cases} x_j^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1,j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ 1 & \text{if } s = d_{patch} + l + 3 \\ 0 & \text{if } s \in \{d_{patch} + l + 2, d_{patch} + l + 4\} \end{cases} \quad (14)$$

The first lemma shows that single-head attention layer can be used to compute linear functions in one variable.

Lemma 18 *Let $\mathbf{x}_j \in \mathbb{R}^{d_{patch}}$ and $b_j \in \mathbb{R}$ ($j = 1, \dots, l$). Let $Z \in \mathbb{R}^{d_{model} \times l}$ be given by*

$$z_j^{(s)} = \begin{cases} x_j^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1,j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ b_j & \text{if } s = d_{patch} + l + 3 \\ 0 & \text{if } s \in \{d_{patch} + l + 2, d_{patch} + l + 4\} \end{cases}$$

Let $j \in \{1, \dots, l\}$, $k \in \{1, \dots, d_{patch}\}$ and $u \in \mathbb{R}$ be arbitrary. Let

$$B > 2 \cdot \max_{s=1, \dots, d_{patch}, j=1, \dots, l} |x_j^{(s)}|.$$

Then there exist matrices $W_Q, W_K \in \mathbb{R}^{2 \times d_{model}}$ and $W_V, W_O \in \mathbb{R}^{d_{model} \times d_{model}}$, where

$$\|W_Q\|_0 + \|W_K\|_0 + \|W_V\|_0 + \|W_O\|_0 \leq d_{model} + 6,$$

such that

$$Y = F^{(SA)}(Z) \in \mathbb{R}^{d_{model} \times l}$$

satisfies

$$y_1^{(s)} = \begin{cases} x_1^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1,j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ x_j^{(k)} - u & \text{if } s = d_{patch} + l + 2 \\ b_1 & \text{if } s = d_{patch} + l + 3 \\ 0 & \text{if } s = d_{patch} + l + 4 \end{cases}$$

and

$$\mathbf{y}_j = \mathbf{z}_j \quad \text{for } j \in \{2, \dots, l\}.$$

Proof See also Gurevych et al. (2022, Lemma 1). Let $W_O = \mathbb{I}_{d_{model}}$,

$$W_Q = \begin{pmatrix} 0 & \dots & 0 & 1 & 0 & \dots & 0 \\ 0 & \dots & 0 & B & 0 & \dots & 0 \end{pmatrix}$$

where all columns are zero except for column number $d_{patch} + 2$,

$$W_K = \begin{pmatrix} 0 & \dots & 0 & 1 & 0 & \dots & 0 & -u - B & 0 & \dots & 0 & 0 & 0 & \dots & 0 \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 & 0 & 0 & \dots & 0 & 1 & 0 & \dots & 0 \end{pmatrix}$$

where all columns are zero except for column number k , column number $d_{patch} + 1$ and column number $d_{patch} + 1 + j$, and

$$W_V = \begin{pmatrix} 0 & \dots & 0 & 0 & 0 & \dots & 0 \\ \vdots & & \vdots & \vdots & \vdots & & \vdots \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 \\ 0 & \dots & 0 & 1 & 0 & \dots & 0 \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 \\ \vdots & & \vdots & \vdots & \vdots & & \vdots \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 \end{pmatrix}$$

where all rows and all columns are zero except for row number $d_{patch} + l + 2$ and column number $d_{patch} + 1$. Direct calculations give that

$$W_O(W_V Z) \left[\left((W_K Z)^\top (W_Q Z) \right) \odot \sigma_H \left((W_K Z)^\top (W_Q Z) \right) \right] = \begin{pmatrix} 0 & 0 & \dots & 0 \\ \vdots & \vdots & & \vdots \\ 0 & 0 & \dots & 0 \\ x_j^{(k)} - u & 0 & \dots & 0 \\ 0 & 0 & \dots & 0 \\ 0 & 0 & \dots & 0 \end{pmatrix},$$

where all rows and all columns are zero except for row number $d_{patch} + l + 2$ and column number 1, which completes the proof. \blacksquare

The next lemma shows that single-head attention layer can be used to compute products.

Lemma 19 *Let $\mathbf{x}_s \in \mathbb{R}^{d_{patch}}$ and $a_s, b_s \in \mathbb{R}$ ($s = 1, \dots, l$). Let $Z \in \mathbb{R}^{d_{model} \times l}$ be given by*

$$z_j^{(s)} = \begin{cases} x_j^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1, j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ a_j & \text{if } s = d_{patch} + l + 2 \\ b_j & \text{if } s = d_{patch} + l + 3 \\ 0 & \text{if } s = d_{patch} + l + 4 \end{cases}.$$

Let $j \in \{1, \dots, l\}$. Let

$$B > 2|b_1| \cdot \max_{r=1, \dots, l} |a_r|.$$

Then there exist matrices $W_Q, W_K \in \mathbb{R}^{2 \times d_{model}}$ and $W_V, W_O \in \mathbb{R}^{d_{model} \times d_{model}}$, where

$$\|W_Q\|_0 + \|W_K\|_0 + \|W_V\|_0 + \|W_O\|_0 \leq d_{model} + 5,$$

such that

$$Y = F^{(SA)}(Z) \in \mathbb{R}^{d_{model} \times l}$$

satisfies

$$y_1^{(s)} = \begin{cases} x_1^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1, j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ a_1 & \text{if } s = d_{patch} + l + 2 \\ b_1 & \text{if } s = d_{patch} + l + 3 \\ b_1 \cdot a_j + B & \text{if } s = d_{patch} + l + 4 \end{cases}$$

and

$$y_s^{(i)} = z_s^{(i)} \quad \text{for } i \in \{1, \dots, d_{patch} + l + 3\}, s \in \{1, \dots, l\}.$$

Proof See also Gurevych et al. (2022, Lemma 2). Define W_V as in the proof of Lemma 18 such that all rows and all columns are zero except for row number $d_{patch} + l + 4$ and column number $d_{patch} + 1$. Let $W_O = \mathbb{I}_{d_{model}}$,

$$W_Q = \begin{pmatrix} 0 & \dots & 0 & 0 & 0 & \dots & 0 & 1 & 0 & \dots & 0 \\ 0 & \dots & 0 & B & 0 & \dots & 0 & 0 & 0 & \dots & 0 \end{pmatrix}$$

where all columns are zero except for column number $d_{patch} + 2$ and column number $d_{patch} + l + 3$, and

$$W_K = \begin{pmatrix} 0 & \dots & 0 & 0 & 0 & \dots & 0 & 1 & 0 & \dots & 0 \\ 0 & \dots & 0 & 1 & 0 & \dots & 0 & 0 & 0 & \dots & 0 \end{pmatrix}$$

where all columns are zero except for column number $d_{patch} + 1 + j$ and column number $d_{patch} + l + 2$. Direct calculations give that

$$W_O(W_V Z) \left[\left((W_K Z)^\top (W_Q Z) \right) \odot \sigma_H \left((W_K Z)^\top (W_Q Z) \right) \right] = \begin{pmatrix} 0 & 0 & \dots & 0 \\ \vdots & \vdots & & \vdots \\ 0 & 0 & \dots & 0 \\ b_1 \cdot a_j + B & * & \dots & * \end{pmatrix},$$

where all rows are zero except for row number $d_{patch} + l + 4$ and the symbol $*$ indicates the specific values are not of concern. \blacksquare

The following lemma illustrates that single-head attention layer can be used to compute squares.

Lemma 20 Let $a \in \mathbb{R}$, $\mathbf{x}_s \in \mathbb{R}^{d_{patch}}$ and $b_s \in \mathbb{R}$ ($s = 1, \dots, l$). Let $Z \in \mathbb{R}^{d_{model} \times l}$ be given by

$$z_j^{(s)} = \begin{cases} x_j^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1, j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ a \cdot \delta_{j, 1} & \text{if } s = d_{patch} + l + 2 \\ b_j & \text{if } s = d_{patch} + l + 3 \\ 0 & \text{if } s = d_{patch} + l + 4 \end{cases}.$$

Then there exist matrices $W_Q, W_K \in \mathbb{R}^{1 \times d_{model}}$ and $W_V, W_O \in \mathbb{R}^{d_{model} \times d_{model}}$, where

$$\|W_Q\|_0 + \|W_K\|_0 + \|W_V\|_0 + \|W_O\|_0 \leq d_{model} + 3,$$

such that

$$Y = F^{(SA)}(Z) \in \mathbb{R}^{d_{model} \times l}$$

satisfies

$$y_1^{(s)} = \begin{cases} x_1^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1, j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ a & \text{if } s = d_{patch} + l + 2 \\ b_1 & \text{if } s = d_{patch} + l + 3 \\ a^2 & \text{if } s = d_{patch} + l + 4 \end{cases}$$

and

$$\mathbf{y}_j = \mathbf{z}_j \quad \text{for } j \in \{2, \dots, l\}.$$

Proof Define W_V as in the proof of Lemma 18 such that all rows and all columns are zero except for row number $d_{patch} + l + 4$ and column number $d_{patch} + 1$. Let $W_O = \mathbb{I}_{d_{model}}$,

$$W_Q = (0 \quad \dots \quad 0 \quad 1 \quad 0 \quad 0)$$

where all columns are zero except for column number $d_{patch} + l + 2$ and $W_K = W_Q$. Direct calculations give that

$$W_O(W_V Z) \left[\left((W_K Z)^\top (W_Q Z) \right) \odot_{\sigma_H} \left((W_K Z)^\top (W_Q Z) \right) \right] = \begin{pmatrix} 0 & 0 & \dots & 0 \\ \vdots & \vdots & & \vdots \\ 0 & 0 & \dots & 0 \\ a^2 & 0 & \dots & 0 \end{pmatrix},$$

where all rows and all columns are zero except for row number $d_{patch} + l + 4$ and column number 1, which completes the proof. \blacksquare

The following lemma introduces a special token-wise feedforward layer that applies the function $x \mapsto \alpha \cdot (x - B)$ to the $d + l + 4$ -th component of each token and writes the result into the $d + l + 3$ -th component. This layer is usually positioned after the attention layer defined in Lemma 19.

Lemma 21 *Let $Y = (\mathbf{y}_1, \dots, \mathbf{y}_l) \in \mathbb{R}^{d_{model} \times l}$. Let $d_{ff} \geq 8$ and let $\alpha, B \in \mathbb{R}$. Then there exist matrices and vectors*

$$W_1 \in \mathbb{R}^{d_{ff} \times d_{model}}, \quad \mathbf{b}_1 \in \mathbb{R}^{d_{ff}}, \quad W_2 \in \mathbb{R}^{d_{model} \times d_{ff}}, \quad \mathbf{b}_2 \in \mathbb{R}^{d_{model}},$$

where

$$\|W_1\|_0 + \|\mathbf{b}_1\|_0 + \|W_2\|_0 + \|\mathbf{b}_2\|_0 \leq 18,$$

such that

$$Z = F^{(FF)}(Y)$$

satisfies

$$z_s^{(i)} = \begin{cases} y_s^{(i)} & \text{if } i \in \{1, \dots, d_{patch} + l + 1\} \\ \alpha \cdot \left(y_s^{(d_{patch} + l + 4)} - B y_s^{(d_{patch} + 1)} \right) & \text{if } i = d_{patch} + l + 3 \\ 0 & \text{if } i \in \{d_{patch} + l + 2, d_{patch} + l + 4\} \end{cases}$$

for $s \in \{1, \dots, l\}$.

Proof See also Gurevych et al. (2022, Lemma 3). We choose $\mathbf{b}_1 = \mathbb{0}_{d_{ff}}$, $\mathbf{b}_2 = \mathbb{0}_{d_{model}}$,

$$W_1 = \begin{pmatrix} 0 & \dots & 0 & 0 & 0 & \dots & 0 & 1 & 0 & 0 \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 & -1 & 0 & 0 \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 & 0 & 1 & 0 \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 & 0 & -1 & 0 \\ 0 & \dots & 0 & -B & 0 & \dots & 0 & 0 & 0 & 1 \\ 0 & \dots & 0 & B & 0 & \dots & 0 & 0 & 0 & -1 \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 & 0 & 0 & 1 \\ 0 & \dots & 0 & 0 & 0 & \dots & 0 & 0 & 0 & -1 \end{pmatrix}$$

where all columns except column number $d_{patch} + 1$, $d_{patch} + l + 2$, $d_{patch} + l + 3$ and $d_{patch} + l + 4$ are zero, and

$$W_2 = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ -1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 1 & \alpha & -\alpha & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & -1 & 1 \end{pmatrix}$$

where all rows except row number $d_{patch} + l + 2, d_{patch} + l + 3$ and $d_{patch} + l + 4$ are zero. Then we have

$$W_2 \cdot \sigma(W_1 \cdot \mathbf{y}_s + \mathbf{b}_1) + \mathbf{b}_2 = \begin{pmatrix} 0 \\ \vdots \\ 0 \\ -\sigma\left(y_s^{(d_{patch}+l+2)}\right) + \sigma\left(-y_s^{(d_{patch}+l+2)}\right) \\ A \\ -\sigma\left(y_s^{(d_{patch}+l+4)}\right) + \sigma\left(-y_s^{(d_{patch}+l+4)}\right) \end{pmatrix},$$

where

$$A = -\sigma\left(y_s^{(d_{patch}+l+3)}\right) + \sigma\left(-y_s^{(d_{patch}+l+3)}\right) \\ + \alpha \cdot \sigma\left(y_s^{(d_{patch}+l+4)} - By_s^{(d_{patch}+1)}\right) - \alpha \cdot \sigma\left(By_s^{(d_{patch}+1)} - y_s^{(d_{patch}+l+4)}\right).$$

Using the fact $\sigma(u) - \sigma(-u) = u$ for any $u \in \mathbb{R}$ completes the proof. \blacksquare

Remark 22 *It follows from the proof of Lemma 21 that we can modify W_1 and W_2 such that*

$$z_s^{(i)} = \begin{cases} y_s^{(i)} & \text{if } i \in \{1, \dots, d_{patch} + l + 1, d_{patch} + l + 2\} \\ \alpha \cdot \left(y_s^{(d_{patch}+l+4)} - By_s^{(d_{patch}+1)}\right) & \text{if } i = d_{patch} + l + 3 \\ 0 & \text{if } i = d_{patch} + l + 4 \end{cases}$$

for $s \in \{1, \dots, l\}$.

Remark 23 *It follows from the proof of Lemma 21 that we can modify W_1 and W_2 such that*

$$z_s^{(i)} = \begin{cases} y_s^{(i)} & \text{if } i \in \{1, \dots, d_{patch} + l + 1, d_{patch} + l + 3\} \\ y_s^{(d_{patch}+l+4)} & \text{if } i = d_{patch} + l + 2 \\ 0 & \text{if } i = d_{patch} + l + 4 \end{cases}$$

for $s \in \{1, \dots, l\}$.

Remark 24 *It follows from the proof of Lemma 21 that we can modify W_1 and W_2 such that*

$$z_s^{(i)} = \begin{cases} y_s^{(i)} & \text{if } i \in \{1, \dots, d_{patch} + l + 1, d_{patch} + l + 3\} \\ 0 & \text{if } i \in \{d_{patch} + l + 2, d_{patch} + l + 4\} \end{cases}$$

for $s \in \{1, \dots, l\}$.

The following lemma shows that transformer networks with single-head attention can be used to compute monomials.

Lemma 25 Assume $X \in [0, 1]^{d_{patch} \times l}$. Let $M_\varepsilon \geq 2$. For any multi-index $n \in \mathbb{N}^{d_{patch} \times l}$ with $\|n\|_1 \leq M_\varepsilon$, we define

$$\eta_n(X) = \prod_{k=1}^l \prod_{s=1}^{d_{patch}} \left(x_k^{(s)}\right)^{n_{s,k}}. \quad (15)$$

Then there exists a transformer network consisting of N pairs of layers, where in each pair the first layer is a single-head attention layer and the second layer is a token-wise feedforward layer, and

$$\begin{aligned} N &\leq 2l d_{patch} (\log_2 M_\varepsilon + 1), \\ \sum_{r=1}^N (\|W_{Q,r}\|_0 + \|W_{K,r}\|_0 + \|W_{V,r}\|_0 + \|W_{O,r}\|_0) &+ \sum_{r=1}^N (\|W_{r,1}\|_0 + \|\mathbf{b}_{r,1}\|_0 + \|W_{r,2}\|_0 + \|\mathbf{b}_{r,2}\|_0) \\ &\leq (d_{patch} + l + 28) N, \end{aligned}$$

which takes Z_0 as the input defined in (14) and generates Z_N as the output, where

$$z_{N,1}^{(d_{patch}+l+3)} = \eta_n(X).$$

Proof For each $n_{s,k}$, we consider its binary representation $n_{s,k} = \sum_{p=0}^P a_{s,k,p} 2^p$, where $a_{s,k,p} \in \{0, 1\}$ and $P \leq \log_2(M_\varepsilon)$. Let

$$Z_0 = \begin{pmatrix} \mathbf{x}_1 & \mathbf{x}_2 & \cdots & \mathbf{x}_l \\ 1 & 1 & \cdots & 1 \\ \mathbf{e}_1 & \mathbf{e}_2 & \cdots & \mathbf{e}_l \\ 0 & 0 & \cdots & 0 \\ b_1 & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix},$$

then application of Lemma 18 yields

$$Y_1 = \begin{pmatrix} \vdots & \vdots & \vdots \\ x_k^{(s)} & 0 & \cdots & 0 \\ b_1 & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix},$$

where the first $d_{patch} + l + 1$ rows of Y_1 are identical to Z_0 and we focus on the last three rows. We set all components of W_1, \mathbf{b}_1, W_2 and \mathbf{b}_2 to zero and the feedforward layer yields

$$Z_1 = \begin{pmatrix} \vdots & \vdots & \vdots \\ x_k^{(s)} & 0 & \cdots & 0 \\ b_1 & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix}.$$

By Lemma 19, we obtain

$$Y_2 = \begin{pmatrix} \vdots & \vdots & \vdots \\ x_k^{(s)} & 0 & \cdots & 0 \\ b_1 & * & \cdots & * \\ b_1 x_k^{(s)} + B & * & \cdots & * \end{pmatrix}.$$

By Remark 22, we obtain

$$Z_2 = \begin{pmatrix} \vdots & \vdots & \vdots \\ x_k^{(s)} & 0 & \cdots & 0 \\ b_1 x_k^{(s)} & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix}.$$

Let $r \in \{1, \dots, P\}$. Assume that we already have

$$Z_m = \begin{pmatrix} \vdots & \vdots & \vdots \\ \left(x_k^{(s)}\right)^{2^{r-1}} & 0 & \cdots & 0 \\ b_1 \cdot \left(x_k^{(s)}\right)^{\sum_{p=0}^{r-1} a_{s,k,p} 2^p} & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix}$$

for some $m \in \mathbb{N}$. Then we apply Lemma 20 to obtain

$$Y_{m+1} = \begin{pmatrix} \vdots & \vdots & \vdots \\ \left(x_k^{(s)}\right)^{2^{r-1}} & 0 & \cdots & 0 \\ b_1 \cdot \left(x_k^{(s)}\right)^{\sum_{p=0}^{r-1} a_{s,k,p} 2^p} & * & \cdots & * \\ \left(x_k^{(s)}\right)^{2^r} & 0 & \cdots & 0 \end{pmatrix}.$$

Using Remark 23, we have

$$Z_{m+1} = \begin{pmatrix} \vdots & \vdots & \vdots \\ \left(x_k^{(s)}\right)^{2^r} & 0 & \cdots & 0 \\ b_1 \cdot \left(x_k^{(s)}\right)^{\sum_{p=0}^{r-1} a_{s,k,p} 2^p} & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix}.$$

By consecutively employing Lemma 19 and Remark 22, we obtain

$$Y_{m+2} = \begin{pmatrix} \vdots & \vdots & \vdots \\ \left(x_k^{(s)}\right)^{2^r} & 0 & \cdots & 0 \\ b_1 \cdot \left(x_k^{(s)}\right)^{\sum_{p=0}^{r-1} a_{s,k,p} 2^p} & * & \cdots & * \\ b_1 \cdot \left(x_k^{(s)}\right)^{\sum_{p=0}^{r-1} a_{s,k,p} 2^{p+2^r}} + B & 0 & \cdots & 0 \end{pmatrix}$$

and

$$Z_{m+2} = \begin{pmatrix} \vdots & \vdots & \vdots \\ \left(x_k^{(s)}\right)^{2^r} & 0 & \cdots & 0 \\ b_1 \cdot \left(x_k^{(s)}\right)^{\sum_{p=0}^{r-1} a_{s,k,p} 2^p + 2^r} & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix}.$$

If $a_{s,k,r} = 0$, Z_{m+1} meets the next induction hypothesis. Otherwise, if $a_{s,k,r} = 1$, Z_{m+2} becomes the next induction hypothesis.

In the last step, we make the following modifications: if $a_{s,k,P} = 0$, we substitute Remark 23 with Remark 24; if $a_{s,k,P} = 1$, we replace Remark 22 with Lemma 21. We combine a total of $\sum_{p=0}^P (a_{s,k,p} + 1)$ pairs of attention and feedforward layers to achieve

$$Z_{\sum_{p=0}^P (a_{s,k,p} + 1)} = \begin{pmatrix} \vdots & \vdots & \vdots \\ 0 & 0 & \cdots & 0 \\ b_1 \cdot \left(x_k^{(s)}\right)^{\sum_{p=0}^P a_{s,k,p} 2^p} & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix} = \begin{pmatrix} \vdots & \vdots & \vdots \\ 0 & 0 & \cdots & 0 \\ b_1 \cdot \left(x_k^{(s)}\right)^{n_{s,k}} & * & \cdots & * \\ 0 & 0 & \cdots & 0 \end{pmatrix}.$$

Iterating over all components of n , we obtain a transformer network, which takes Z_0 as the input, as defined in (14), and generates Z_N as the output, where

$$Z_{N,1}^{(d_{patch} + l + 3)} = \eta_n(x)$$

and

$$N = \sum_{k=1}^l \sum_{s=1}^{d_{patch}} \sum_{p=0}^P (a_{s,k,p} + 1) \leq \sum_{k=1}^l \sum_{s=1}^{d_{patch}} \sum_{p=0}^P 2 \leq 2l d_{patch} (\log_2 M_\varepsilon + 1). \quad \blacksquare$$

A.3 Approximation of polynomials with multi-head attention

In this subsection, we generalize the results from the previous subsection to transformer networks with multi-head attention. The basic idea is to use each head to compute a monomial as in Lemma 25, and employ a linear combination of these monomials to approximate arbitrary function.

As in input embedding, we represent the input sequence by

$$Z_0 = (z_{0,1}, \dots, z_{0,l}) \in \mathbb{R}^{d_{model} \times l}$$

where $d_{model} = h \cdot (d_{patch} + l + 4)$ and

$$z_{0,j}^{((k-1) \cdot (d_{patch} + l + 4) + s)} = \begin{cases} x_j^{(s)} & \text{if } s \in \{1, \dots, d_{patch}\} \\ 1 & \text{if } s = d_{patch} + 1 \\ \delta_{s-d_{patch}-1,j} & \text{if } s \in \{d_{patch} + 2, \dots, d_{patch} + l + 1\} \\ 1 & \text{if } s = d_{patch} + l + 3 \\ 0 & \text{if } s \in \{d_{patch} + l + 2, d_{patch} + l + 4\} \end{cases} \quad (16)$$

for $k \in \{1, \dots, h\}$, $j \in \{1, \dots, l\}$.

Lemma 26 *Let $h \in \mathbb{N}$ and let $s : \{n \in \mathbb{N}^{d_{patch} \times l} : \|n\|_1 \leq M_\varepsilon\} \rightarrow \{1, \dots, h\}$, $n \mapsto s(n)$ be an injection. Then there exists a transformer network consisting of N pairs of layers, where in each pair the first layer is a multi-head attention layer with h heads and the second layer is a token-wise feedforward layer, and*

$$N \leq 2l d_{patch} (\log_2 M_\varepsilon + 1), \quad d_k = 2, \quad d_v = d_{patch} + l + 4,$$

$$h \leq \binom{l \cdot d_{patch} + M_\varepsilon}{l \cdot d_{patch}}, \quad d_{ff} = 8h,$$

$$\begin{aligned} & \sum_{r=1}^N \sum_{s=1}^h (\|W_{Q,r,s}\|_0 + \|W_{K,r,s}\|_0 + \|W_{V,r,s}\|_0 + \|W_{O,r,s}\|_0) \\ & + \sum_{r=1}^N (\|W_{r,1}\|_0 + \|b_{r,1}\|_0 + \|W_{r,2}\|_0 + \|b_{r,2}\|_0) \leq (d_{patch} + l + 28) \cdot N \cdot h, \end{aligned}$$

which gets as input Z_0 defined in (16) and produces as output Z_N which satisfies

$$z_{N,1}^{((s-1) \cdot (d_{patch} + l + 4) + (d_{patch} + l + 3))} = \eta_n(X).$$

Proof The result is a straightforward extension of the proof of Lemma 25. To begin with, we choose

$$W_{O,s} = \begin{pmatrix} \mathbb{O} \\ \vdots \\ \mathbb{O} \\ \widetilde{W}_{O,s} \\ \mathbb{O} \\ \vdots \\ \mathbb{O} \end{pmatrix}, \quad W_{K,s} = (\mathbb{O}, \dots, \mathbb{O}, \widetilde{W}_{K,s}, \mathbb{O}, \dots, \mathbb{O}),$$

$$W_{Q,s} = (\mathbb{O}, \dots, \mathbb{O}, \widetilde{W}_{Q,s}, \mathbb{O}, \dots, \mathbb{O}), \quad W_{V,s} = (\mathbb{O}, \dots, \mathbb{O}, \widetilde{W}_{V,s}, \mathbb{O}, \dots, \mathbb{O}),$$

where in each matrix all blocks are designated as zero matrices except for the s -th block, and $\widetilde{W}_{K,s}, \widetilde{W}_{Q,s} \in \mathbb{R}^{d_k \times (d_{patch} + l + 4)}$, $\widetilde{W}_{V,s}, \widetilde{W}_{O,s} \in \mathbb{R}^{(d_{patch} + l + 4) \times (d_{patch} + l + 4)}$. We format the input sequence Z into identical blocks

$$Z = \begin{pmatrix} Z_1 \\ Z_2 \\ \vdots \\ Z_h \end{pmatrix}$$

with each $Z_s \in \mathbb{R}^{(d_{patch} + l + 4) \times l}$ for $s \in \{1, \dots, h\}$. The application of a multi-head attention layer to Z can be interpreted as the individual application of a single-head attention layer

to each Z_s , that is,

$$F^{(SA)}(Z) = \begin{pmatrix} \tilde{F}_1^{(SA)}(Z_1) \\ \vdots \\ \tilde{F}_h^{(SA)}(Z_h) \end{pmatrix},$$

where $\tilde{F}_s^{(SA)}(Z_s)$ is a single-head attention layer applied only to Z_s . Similarly, we define

$$W_1 = \begin{pmatrix} \tilde{W}_{1,1} & \mathbb{O} & \cdots & \mathbb{O} \\ \mathbb{O} & \tilde{W}_{1,2} & \cdots & \mathbb{O} \\ \vdots & \vdots & \ddots & \vdots \\ \mathbb{O} & \mathbb{O} & \cdots & \tilde{W}_{1,h} \end{pmatrix}, \quad \mathbf{b}_1 = \begin{pmatrix} \tilde{\mathbf{b}}_{1,1} \\ \tilde{\mathbf{b}}_{1,2} \\ \vdots \\ \tilde{\mathbf{b}}_{1,h} \end{pmatrix},$$

$$W_2 = \begin{pmatrix} \tilde{W}_{2,1} & \mathbb{O} & \cdots & \mathbb{O} \\ \mathbb{O} & \tilde{W}_{2,2} & \cdots & \mathbb{O} \\ \vdots & \vdots & \ddots & \vdots \\ \mathbb{O} & \mathbb{O} & \cdots & \tilde{W}_{2,h} \end{pmatrix}, \quad \mathbf{b}_2 = \begin{pmatrix} \tilde{\mathbf{b}}_{2,1} \\ \tilde{\mathbf{b}}_{2,2} \\ \vdots \\ \tilde{\mathbf{b}}_{2,h} \end{pmatrix},$$

where $\tilde{W}_{1,s} \in \mathbb{R}^{8 \times (d_{patch} + l + 4)}$, $\tilde{\mathbf{b}}_{1,s} \in \mathbb{R}^8$, $\tilde{W}_{2,s} \in \mathbb{R}^{(d_{patch} + l + 4) \times 8}$, $\tilde{\mathbf{b}}_{1,s} \in \mathbb{R}^{d_{patch} + l + 4}$ for $s \in \{1, \dots, h\}$, and let

$$Y = \begin{pmatrix} Y_1 \\ \vdots \\ Y_h \end{pmatrix}$$

with each $Y_s \in \mathbb{R}^{(d_{patch} + l + 4) \times l}$. Then

$$F^{(FF)}(Y) = \begin{pmatrix} \tilde{F}_1^{(FF)}(Y_1) \\ \vdots \\ \tilde{F}_h^{(FF)}(Y_h) \end{pmatrix},$$

where $\tilde{F}_s^{(FF)}(Y_s)$ is a token-wise feedforward layer that operates only on Y_s . Utilizing the method in Lemma 25, we compute $\eta_n(X)$ for each block independently. \blacksquare

Proof [Proof of Theorem 8] We first consider the case where f is a real-valued function. Let $\beta > 0$ and $f \in \mathcal{H}_{d,1}^\beta([0, 1]^{d_{patch} \times l}, K)$. According to Lemma 27, for each $M_\varepsilon \in \mathbb{N}$, there exists a polynomial $P_{M_\varepsilon}^\beta f$ of degree at most M_ε such that for all $X \in [0, 1]^{d_{patch} \times l}$ and each multi-index α with $\|\alpha\|_1 \leq \min\{\lfloor \beta \rfloor, M_\varepsilon\}$ we have

$$\left| \partial^\alpha \left(f(X) - P_{M_\varepsilon}^\beta f(X) \right) \right| \leq \frac{c_1 K}{M_\varepsilon^{\beta - \|\alpha\|_1}},$$

where the constant c_1 is independent of M_ε and K . Since

$$P_{M_\varepsilon}^\beta f(X) = \sum_{\|n\|_1 \leq M_\varepsilon} a_n \eta_n(X),$$

where $n \in \mathbb{N}^{d_{patch} \times l}$, $a_n \in \mathbb{R}$, and $\eta_n(X)$ is a monomial defined in (15) for each n , we can implement this linear combination using the output embedding and Lemma 26. Namely, we define $b_{out} = 0 \in \mathbb{R}$ and $A_{out} \in \mathbb{R}^{1 \times d_{model}}$ a zero matrix except for the $((s-1) \cdot (d_{patch} + l + 4) + (d_{patch} + l + 3))$ -th position where it takes the value of a_n for all n with $\|n\|_1 \leq M_\varepsilon$, then

$$\|A_{out}\|_0 + \|b_{out}\|_0 \leq h$$

and

$$A_{out} \cdot \mathbf{z}_{N,1} + b_{out} = P_{M_\varepsilon}^\beta f(X),$$

where $Z_N = \{\mathbf{z}_{N,1}, \dots, \mathbf{z}_{N,l}\}$ is taken from Lemma 26.

We then consider the case where \mathbf{f} is a $\mathbb{R}^{d'}$ -valued function. For function $\mathbf{f} = (f_1, \dots, f_{d'})^\top \in \mathcal{H}_{d,d'}^\beta([0,1]^d, K)$, each component of \mathbf{f} is a real-valued function. As previously mentioned, we have $d = l \cdot d_{patch}$, and we do not differentiate between functions with respect to either \mathbf{x} or X as independent variables. Define

$$\tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{x}) = \begin{pmatrix} P_{M_\varepsilon}^\beta f_1(\mathbf{x}) \\ P_{M_\varepsilon}^\beta f_2(\mathbf{x}) \\ \vdots \\ P_{M_\varepsilon}^\beta f_{d'}(\mathbf{x}) \end{pmatrix}, \quad (17)$$

then for all $\mathbf{x} \in [0,1]^d$ we have

$$\left\| \mathbf{f}(\mathbf{x}) - \tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{x}) \right\|_{L^\infty([0,1]^d)} \leq \frac{c_2 K}{M_\varepsilon^\beta}$$

and there exist $A_{out} \in \mathbb{R}^{d' \times d_{model}}$ and $\mathbf{b}_{out} \in \mathbb{R}^{d'}$ such that

$$\|A_{out}\|_0 + \|\mathbf{b}_{out}\|_0 \leq d' \cdot h$$

and

$$A_{out} \cdot \mathbf{z}_{N,1} + \mathbf{b}_{out} = \tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{x}),$$

where Z_N is taken from Lemma 26.

We put things together. Let

$$M_\varepsilon = \left\lceil \left(\frac{c_2 K}{\varepsilon} \right)^{1/\beta} \right\rceil, \quad (18)$$

then

$$\left\| \mathbf{f}(\mathbf{x}) - \tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{x}) \right\|_{L^\infty([0,1]^d)} \leq \varepsilon.$$

Combining input embedding, output embedding and Lemma 26, there exists a transformer network ϕ consisting of N pairs of layers, where

$$\begin{aligned}
 N &\leq 2l d_{patch} (\log_2 M_\varepsilon + 1) \leq 4d \log_2 \left(\left\lceil \left(\frac{c_2 K}{\varepsilon} \right)^{1/\beta} \right\rceil \right) = \mathcal{O} \left(\log \left(\frac{K}{\varepsilon} \right) \right), \\
 h &\leq \left(\frac{d + \left\lceil \left(\frac{c_2 K}{\varepsilon} \right)^{1/\beta} \right\rceil}{d} \right) = \mathcal{O} \left(\left(\frac{K}{\varepsilon} \right)^{d/\beta} \right), \quad d_{ff} = 8h, \\
 d_k &= 2 = \mathcal{O}(1), \quad d_v = d_{patch} + l + 4 = \mathcal{O}(1), \\
 J &= \sum_{r=1}^N \sum_{s=1}^h (\|W_{Q,r,s}\|_0 + \|W_{K,r,s}\|_0 + \|W_{V,r,s}\|_0 + \|W_{O,r,s}\|_0) \\
 &\quad + \sum_{r=1}^N (\|W_{r,1}\|_0 + \|b_{r,1}\|_0 + \|W_{r,2}\|_0 + \|b_{r,2}\|_0) \\
 &\quad + \|A_{in}\|_0 + \|b_{in}\|_0 + \|A_{out}\|_0 + \|b_{out}\|_0 \\
 &\leq (d_{patch} + l + 28) \cdot N \cdot h + (d_{patch} + l + 2) \cdot h + d' \cdot h \\
 &\leq (8d^2 + 114d + 2 + d') \cdot \log_2 \left(\left\lceil \left(\frac{c_2 K}{\varepsilon} \right)^{1/\beta} \right\rceil \right) \cdot \left(\frac{d + \left\lceil \left(\frac{c_2 K}{\varepsilon} \right)^{1/\beta} \right\rceil}{d} \right) \\
 &= \mathcal{O} \left(\left(\frac{K}{\varepsilon} \right)^{d/\beta} \log \left(\frac{K}{\varepsilon} \right) \right)
 \end{aligned}$$

such that

$$\phi(\mathbf{x}) = \tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{x}) \tag{19}$$

for all $\mathbf{x} \in [0, 1]^d$. Since

$$\|\phi(\mathbf{x})\| \leq \|\mathbf{f}(\mathbf{x})\| + \|\phi(\mathbf{x}) - \mathbf{f}(\mathbf{x})\| \leq \sup_{\mathbf{x} \in [0, 1]^d} \|\mathbf{f}(\mathbf{x})\| + \varepsilon,$$

we may choose $B = \mathcal{O}(\|\mathbf{f}\|_{L^\infty([0, 1]^d)})$.

Additionally, we examine the Lipschitz constant for $\phi(\mathbf{x})$. When $\beta > 1$, since

$$\begin{aligned}
 \left| \frac{\partial}{\partial x_k^{(s)}} \left(P_{M_\varepsilon}^\beta f(\mathbf{x}) \right) \right| &\leq \left| \frac{\partial}{\partial x_k^{(s)}} (f(\mathbf{x})) \right| + \left| \frac{\partial}{\partial x_k^{(s)}} \left(P_{M_\varepsilon}^\beta f(\mathbf{x}) - f(\mathbf{x}) \right) \right| \\
 &\leq K + \frac{c_2 K}{M_\varepsilon^{\beta-1}} \\
 &\leq (1 + c_2)K,
 \end{aligned}$$

mean value theorem yields

$$\left| P_{M_\varepsilon}^\beta f(\mathbf{x}) - P_{M_\varepsilon}^\beta f(\mathbf{y}) \right| \leq d(1 + c_2)K \|\mathbf{x} - \mathbf{y}\|$$

for all $\mathbf{x}, \mathbf{y} \in [0, 1]^d$. Thus, by the definition of $\tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{x})$ in (17), we obtain

$$\begin{aligned} \|\phi(\mathbf{x}) - \phi(\mathbf{y})\| &= \left\| \tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{x}) - \tilde{P}_{M_\varepsilon}^\beta \mathbf{f}(\mathbf{y}) \right\| \\ &\leq c_3 K \|\mathbf{x} - \mathbf{y}\|, \end{aligned}$$

which indicates the transformer network ϕ is $\mathcal{O}(K)$ -Lipschitz when $\beta > 1$. \blacksquare

Proof [Proof of Theorem 9] We only need to modify the proof in Theorem 8 by replacing Lemma 27 with Lemma 28. \blacksquare

Lemma 27 *For each $f \in \mathcal{H}_{d,1}^\beta([0, 1]^d, K)$ with $\beta > 0$ and positive integer N , there is a polynomial p_N of degree at most N on \mathbb{R}^d , such that for each multi-index α with $\|\alpha\|_1 \leq \min\{\lfloor \beta \rfloor, N\}$ we have*

$$\sup_{[0,1]^d} |\partial^\alpha (f - p_N)| \leq \frac{c_4 K}{N^{\beta - \|\alpha\|_1}},$$

where c_4 is a positive constant depending only on d, β .

Proof Let f be a function of compact support on \mathbb{R}^d , of class \mathcal{C}^m where $0 \leq m < \infty$, and let K be a compact subset of \mathbb{R}^d which contains the support of f . Then Bagby et al. (2002, Theorem 1) gives that for each positive integer N there is a polynomial p_N of degree at most N on \mathbb{R}^d with the following property: for each multi-index α with $\|\alpha\|_1 \leq \min\{m, N\}$ we have

$$\sup_K |\partial^\alpha (f - p_N)| \leq \frac{c_5}{N^{m - \|\alpha\|_1}} \omega_{f,m} \left(\frac{1}{N} \right),$$

where c_5 is a positive constant depending only on d, m and the diameter of K , and

$$\omega_{f,m}(\delta) = \sup_{\|\gamma\|_1=m} \left(\sup_{\|\mathbf{x}-\mathbf{y}\| \leq \delta} |\partial^\gamma f(\mathbf{x}) - \partial^\gamma f(\mathbf{y})| \right).$$

We now consider $f \in \mathcal{H}_{d,1}^\beta([0, 1]^d, K)$ with $\beta > 1$ and $K > 0$. The Whitney extension theorem provides an extension of f to all of \mathbb{R}^d (See Stein (1970, Theorem 4), Hörmander (2015, Theorem 2.3.6)). In more detail, there exists a function F of class $\mathcal{H}_{d,1}^\beta(\mathbb{R}^d, c_6 K)$ on \mathbb{R}^d such that for each multi-index α with $\|\alpha\|_1 \leq \lfloor \beta \rfloor$ we have $\partial^\alpha F = \partial^\alpha f$ on $[0, 1]^d$, and

$$\sum_{\alpha: \|\alpha\|_1 < \beta} \sup_{\mathbb{R}^d} |\partial^\alpha F| + \sum_{\alpha: \|\alpha\|_1 = \lfloor \beta \rfloor} \sup_{\substack{\mathbf{x}, \mathbf{y} \in \mathbb{R}^d \\ \mathbf{x} \neq \mathbf{y}}} \frac{|\partial^\alpha F(\mathbf{x}) - \partial^\alpha F(\mathbf{y})|}{\|\mathbf{x} - \mathbf{y}\|^{\beta - \lfloor \beta \rfloor}} \leq c_6 K,$$

where $c_6 = c_6(\beta)$. We fix a test function $\Psi \in \mathcal{C}_0^\infty(\mathbb{R}^d)$ with compact support and $\Psi \equiv 1$ in the vicinity of $[0, 1]^d$. Since ΨF has compact support and belongs to the class $\mathcal{C}^{\lfloor \beta \rfloor}$, we may

apply the aforementioned multivariate simultaneous approximation theorem to ΨF and find a polynomial p_N of degree at most N , which satisfies

$$\begin{aligned} \sup_{[0,1]^d} |\partial^\alpha (f - p_N)| &= \sup_{[0,1]^d} |\partial^\alpha (\Psi F - p_N)| \\ &\leq \sup_{\mathbb{R}^d} |\partial^\alpha (\Psi F - p_N)| \\ &\leq \frac{c_7}{N^{\lfloor \beta \rfloor - \|\alpha\|_1}} \omega_{\Psi F, \lfloor \beta \rfloor} \left(\frac{1}{N} \right). \end{aligned} \quad (20)$$

For each multi-index α with $\|\alpha\|_1 = \lfloor \beta \rfloor$ and $\mathbf{x}, \mathbf{y} \in \mathbb{R}^d$ with $\|\mathbf{x} - \mathbf{y}\| \leq 1$, we have

$$\begin{aligned} &|\partial^\alpha (\Psi F)(\mathbf{x}) - \partial^\alpha (\Psi F)(\mathbf{y})| \\ &= \left| \sum_{\mathbf{0} \leq \mathbf{k} \leq \alpha} \binom{\alpha}{\mathbf{k}} \left(\partial^{\alpha-\mathbf{k}} \Psi(\mathbf{x}) \cdot \partial^{\mathbf{k}} F(\mathbf{x}) - \partial^{\alpha-\mathbf{k}} \Psi(\mathbf{y}) \cdot \partial^{\mathbf{k}} F(\mathbf{y}) \right) \right| \\ &\leq \sum_{\mathbf{0} \leq \mathbf{k} \leq \alpha} \binom{\alpha}{\mathbf{k}} \left| \partial^{\alpha-\mathbf{k}} \Psi(\mathbf{x}) \cdot \partial^{\mathbf{k}} F(\mathbf{x}) - \partial^{\alpha-\mathbf{k}} \Psi(\mathbf{y}) \cdot \partial^{\mathbf{k}} F(\mathbf{y}) \right| \\ &\leq |\Psi(\mathbf{x})| \cdot |\partial^\alpha F(\mathbf{x}) - \partial^\alpha F(\mathbf{y})| + |\Psi(\mathbf{x}) - \Psi(\mathbf{y})| \cdot |\partial^\alpha F(\mathbf{y})| \\ &\quad + \sum_{\substack{\mathbf{0} \leq \mathbf{k} \leq \alpha \\ \mathbf{k} \neq \alpha}} \binom{\alpha}{\mathbf{k}} \left| \partial^{\alpha-\mathbf{k}} \Psi(\mathbf{x}) \cdot \partial^{\mathbf{k}} F(\mathbf{x}) - \partial^{\alpha-\mathbf{k}} \Psi(\mathbf{y}) \cdot \partial^{\mathbf{k}} F(\mathbf{y}) \right| \\ &\leq |\Psi(\mathbf{x})| \cdot c_6 K \|\mathbf{x} - \mathbf{y}\|^{\beta - \lfloor \beta \rfloor} + \|\nabla \Psi(\xi)\| \|\mathbf{x} - \mathbf{y}\| \cdot |\partial^\alpha F(\mathbf{y})| \\ &\quad + \sum_{\substack{\mathbf{0} \leq \mathbf{k} \leq \alpha \\ \mathbf{k} \neq \alpha}} \binom{\alpha}{\mathbf{k}} \left\| \nabla \left(\partial^{\alpha-\mathbf{k}} \Psi \cdot \partial^{\mathbf{k}} F \right) (\xi_{\mathbf{k}}) \right\| \|\mathbf{x} - \mathbf{y}\| \\ &\leq \|\Psi\|_{L^\infty(\mathbb{R}^d)} \cdot c_6 K \|\mathbf{x} - \mathbf{y}\|^{\beta - \lfloor \beta \rfloor} + \|\nabla \Psi\|_{L^\infty(\mathbb{R}^d)} \|\mathbf{x} - \mathbf{y}\| \cdot c_6 K \\ &\quad + \sum_{\substack{\mathbf{0} \leq \mathbf{k} \leq \alpha \\ \mathbf{k} \neq \alpha}} \binom{\alpha}{\mathbf{k}} \left(\left\| \nabla \left(\partial^{\alpha-\mathbf{k}} \Psi \right) \right\|_{L^\infty(\mathbb{R}^d)} + \left\| \partial^{\alpha-\mathbf{k}} \Psi \right\|_{L^\infty(\mathbb{R}^d)} \right) c_6 K \|\mathbf{x} - \mathbf{y}\| \\ &\leq c_8(\Psi, c_6(\beta), d, \beta) K \cdot \|\mathbf{x} - \mathbf{y}\|^{\beta - \lfloor \beta \rfloor}, \end{aligned}$$

where in the last inequality we use $0 < \beta - \lfloor \beta \rfloor \leq 1$ and $\|\mathbf{x} - \mathbf{y}\| \leq 1$, which indicates

$$\omega_{\Psi F, \lfloor \beta \rfloor} \left(\frac{1}{N} \right) \leq \frac{c_8 K}{N^{\beta - \lfloor \beta \rfloor}}. \quad (21)$$

Combining (20) and (21), we complete the proof for the case when $\beta > 1$.

For $f \in \mathcal{H}_{d,1}^\beta([0,1]^d, K)$ with $0 < \beta \leq 1$, there is a completely analogous proof. \blacksquare

Lemma 28 (Bagby et al. (2002), Theorem 2) *For each $f \in \mathcal{C}_{d,1}^m([0,1]^d, K)$ with $m \in \mathbb{N}$ and positive integer N , there is a polynomial p_N of degree at most N on \mathbb{R}^d , such that for*

each multi-index α with $\|\alpha\|_1 \leq \min\{m, N\}$ we have

$$\sup_{[0,1]^d} |\partial^\alpha (f - p_N)| \leq \frac{c_9 K}{N^{m-\|\alpha\|_1}},$$

where c_9 is a positive constant depending only on d, m .

A.4 Approximation of velocity field

Lemma 43, Lemma 44, and Lemma 46 demonstrate that the true velocity field has certain regularities. As a result, the previous approximation results can be naturally applied to the approximation of the velocity field.

Proof [Proof of Corollary 12] We define $\tilde{\mathbf{v}}^*(\mathbf{x}, t) := \mathbf{v}^*(2R\mathbf{x} - R\mathbf{1}, Tt)$ and restrict the input space of $\tilde{\mathbf{v}}^*$ to $[0, 1]^d \times [0, 1]$. According to Lemma 43, Lemma 44 and Lemma 46, we have $\tilde{\mathbf{v}}^*(\mathbf{x}, t) \in \mathcal{C}_{d+1,d}^1([0, 1]^d \times [0, 1], K)$ with $K = \mathcal{O}\left(\frac{R}{(1-T)^3}\right)$. It follows from Theorem 9 that for any $\varepsilon \in (0, 1)$ there exists a transformer network $\tilde{\mathbf{v}}(\mathbf{x}, t) \in \mathcal{T}_{d+1,d}(N, h, d_k, d_v, d_{ff}, B, J, \gamma)$ with configuration

$$\begin{aligned} N &= \mathcal{O}\left(\log\left(\frac{R}{(1-T)^3\varepsilon}\right)\right), & h &= \mathcal{O}\left(\left(\frac{R}{(1-T)^3\varepsilon}\right)^{d+1}\right), \\ d_{ff} &= 8h, & d_k &= \mathcal{O}(1), & d_v &= \mathcal{O}(1), \\ B &= \mathcal{O}\left(\frac{R}{1-T}\right), & J &= \mathcal{O}\left(\left(\frac{R}{(1-T)^3\varepsilon}\right)^{d+1} \log\left(\frac{R}{(1-T)^3\varepsilon}\right)\right), & \gamma &= \mathcal{O}\left(\frac{R}{(1-T)^3}\right), \end{aligned}$$

such that

$$\|\tilde{\mathbf{v}}(\mathbf{x}, t) - \tilde{\mathbf{v}}^*(\mathbf{x}, t)\|_{L^\infty([0,1]^d \times [0,1])} \leq \varepsilon,$$

which implies

$$\left\| \tilde{\mathbf{v}}\left(\frac{1}{2R}(\mathbf{x} + R\mathbf{1}), \frac{1}{T}t\right) - \mathbf{v}^*(\mathbf{x}, t) \right\|_{L^\infty([-R,R]^d \times [0,T])} \leq \varepsilon.$$

Let $\mathbf{v}(\mathbf{x}, t) := \tilde{\mathbf{v}}\left(\frac{1}{2R}(\text{Proj}_{[-R,R]^d}(\mathbf{x}) + R\mathbf{1}), \frac{1}{T}t\right)$ for $\mathbf{x} \in \mathbb{R}^d$, then $\mathbf{v}(\mathbf{x}, t) \in \mathcal{T}$ and

$$\|\mathbf{v}(\mathbf{x}, t) - \mathbf{v}^*(\mathbf{x}, t)\|_{L^\infty([-R,R]^d \times [0,T])} \leq \varepsilon.$$

By the definition of \mathcal{T} as defined in (8), we choose

$$\gamma_{\mathbf{x}} = \frac{\gamma}{2R} = \mathcal{O}\left(\frac{1}{(1-T)^3}\right), \quad \gamma_t = \frac{\gamma}{T} = \mathcal{O}\left(\frac{R}{(1-T)^3}\right).$$

■

Appendix B. Generalization Error

In this section, we provide the proof for the generalization error by estimating the covering number of the transformer network function class.

B.1 Proof of Lemma 13 and Theorem 14

Proof [Proof of Lemma 13] By performing some calculations, we have

$$\begin{aligned}
 & \mathbb{E} \left[\left\| X_1 - \frac{t}{\sqrt{1-t^2}} X_0 - \mathbf{v}(X_t, t) \right\|^2 \right] \\
 &= \mathbb{E} \left[\left\| X_1 - \frac{t}{\sqrt{1-t^2}} X_0 - \mathbf{v}^*(X_t, t) + \mathbf{v}^*(X_t, t) - \mathbf{v}(X_t, t) \right\|^2 \right] \\
 &= \mathbb{E} \left[\left\| X_1 - \frac{t}{\sqrt{1-t^2}} X_0 - \mathbf{v}^*(X_t, t) \right\|^2 \right] + \|\mathbf{v}(\cdot, t) - \mathbf{v}^*(\cdot, t)\|_{L^2(\pi_t)}^2 \\
 &\quad + 2\mathbb{E} \left[\left\langle X_1 - \frac{t}{\sqrt{1-t^2}} X_0 - \mathbf{v}^*(X_t, t), \mathbf{v}^*(X_t, t) - \mathbf{v}(X_t, t) \right\rangle \right].
 \end{aligned} \tag{22}$$

By taking expectation conditioned on X_t , we have

$$\begin{aligned}
 & \mathbb{E}_{X_0, X_1} \left[\left\langle X_1 - \frac{t}{\sqrt{1-t^2}} X_0 - \mathbf{v}^*(X_t, t), \mathbf{v}^*(X_t, t) - \mathbf{v}(X_t, t) \right\rangle \right] \\
 &= \mathbb{E}_{X_t} \left[\mathbb{E}_{X_0, X_1} \left[\left\langle X_1 - \frac{t}{\sqrt{1-t^2}} X_0 - \mathbf{v}^*(X_t, t), \mathbf{v}^*(X_t, t) - \mathbf{v}(X_t, t) \right\rangle \middle| X_t \right] \right] \\
 &= \mathbb{E}_{X_t} \left[\left\langle \mathbb{E}_{X_0, X_1} \left[X_1 - \frac{t}{\sqrt{1-t^2}} X_0 \middle| X_t \right] - \mathbf{v}^*(X_t, t), \mathbf{v}^*(X_t, t) - \mathbf{v}(X_t, t) \right\rangle \right] \\
 &= \mathbb{E}_{X_t} [\langle \mathbf{v}^*(X_t, t) - \mathbf{v}^*(X_t, t), \mathbf{v}^*(X_t, t) - \mathbf{v}(X_t, t) \rangle] = 0.
 \end{aligned}$$

Substituting the aforementioned identity into (22) and integrating over the interval $[0, T]$ w.r.t. t , we obtain

$$\mathcal{L}(\mathbf{v}) = \mathcal{L}(\mathbf{v}^*) + \frac{1}{T} \int_0^T \|\mathbf{v}(\cdot, t) - \mathbf{v}^*(\cdot, t)\|_{L^2(\pi_t)}^2 dt,$$

which concludes the proof. ■

Proof [Proof of Theorem 14] Let $R > 0$ be determined later. Let $\mathbf{x}_{t,i} := t_i \mathbf{x}_{1,i} + \sqrt{1-t_i^2} \mathbf{x}_{0,i}$.

- **Error decomposition.** We consider the error decomposition in an asymmetric form

$$\begin{aligned}
 & \mathcal{L}(\widehat{\mathbf{v}}) - \mathcal{L}(\mathbf{v}^*) \\
 &= \frac{1}{T} \int_0^T \|\widehat{\mathbf{v}}(\cdot, t) - \mathbf{v}^*(\cdot, t)\|_{L^2(\pi_t)}^2 dt \\
 &= \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \right] \\
 &= \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty \leq R\} \right] \\
 &\quad + \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty > R\} \right] \\
 &= \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty \leq R\} \right] \\
 &\quad - \frac{3}{n} \sum_{i=1}^n \|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \mathbb{1}\{\|\mathbf{x}_{t,i}\|_\infty \leq R\} \\
 &\quad + \frac{3}{n} \sum_{i=1}^n \|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \mathbb{1}\{\|\mathbf{x}_{t,i}\|_\infty \leq R\} \\
 &\quad + \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty > R\} \right].
 \end{aligned} \tag{23}$$

For simplicity, we denote

$$\begin{aligned}
 \text{I} &= \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty \leq R\} \right] \\
 &\quad - \frac{3}{n} \sum_{i=1}^n \|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \mathbb{1}\{\|\mathbf{x}_{t,i}\|_\infty \leq R\} \\
 \text{II} &= \frac{1}{n} \sum_{i=1}^n \|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \mathbb{1}\{\|\mathbf{x}_{t,i}\|_\infty \leq R\} \\
 \text{III} &= \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty > R\} \right].
 \end{aligned}$$

- **Bound of $\mathbb{E}_{\mathcal{X}}[\text{I}]$.** Let $\mathcal{H} = \{h(\mathbf{x}_t, t) := \|\mathbf{v}(\mathbf{x}_t, t) - \mathbf{v}^*(\mathbf{x}_t, t)\|^2 \mathbb{1}\{\|\mathbf{x}_t\|_\infty \leq R\} : \mathbf{v} \in \mathcal{T}\}$. For any $h \in \mathcal{H}$, we have

$$\begin{aligned}
 h(\mathbf{x}_t, t) &\leq 2 \|\mathbf{v}(\mathbf{x}_t, t)\|^2 \mathbb{1}\{\|\mathbf{x}_t\|_\infty \leq R\} + 2 \|\mathbf{v}^*(\mathbf{x}_t, t)\|^2 \mathbb{1}\{\|\mathbf{x}_t\|_\infty \leq R\} \\
 &\leq 2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2},
 \end{aligned}$$

where in the second equality we use Lemma 43, and subsequently

$$\begin{aligned}
 \mathbb{E}_{\mathcal{X}}[\text{I}] &\leq \mathbb{E}_{\mathcal{X}} \left[\sup_{h \in \mathcal{H}} 2\mathbb{E}[h] - \mathbb{E}[h] - \frac{2}{n} \sum_{i=1}^n h(\mathbf{x}_{t,i}, t_i) - \frac{1}{n} \sum_{i=1}^n h(\mathbf{x}_{t,i}, t_i) \right] \\
 &\leq \mathbb{E}_{\mathcal{X}} \left[\sup_{h \in \mathcal{H}} 2\mathbb{E}[h] - \frac{1}{2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}} \mathbb{E}[h^2] - \frac{2}{n} \sum_{i=1}^n h(\mathbf{x}_{t,i}, t_i) \right]
 \end{aligned}$$

$$\left. - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) \right].$$

We can then use the symmetrization technique to bound it by Rademacher complexity. We introduce a ghost dataset $\mathcal{X}' = \{t'_i, \mathbf{x}'_{0,i}, \mathbf{x}'_{1,i}\}_{i=1}^n$ drawn i.i.d. from $\text{Unif}[0, T]$, π_0 and π_1 , and let $\tau = \{\tau_i\}_{i=1}^n$ be a sequence of i.i.d. Rademacher variables independent of both \mathcal{X} and \mathcal{X}' . Then,

$$\begin{aligned} & \mathbb{E}_{\mathcal{X}} \left[\sup_{h \in \mathcal{H}} 2\mathbb{E}[h] - \frac{1}{2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}} \mathbb{E}[h^2] - \frac{2}{n} \sum_{i=1}^n h(\mathbf{x}_{t,i}, t_i) \right. \\ & \quad \left. - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) \right] \\ &= \mathbb{E}_{\mathcal{X}} \left[\sup_{h \in \mathcal{H}} \mathbb{E}_{\mathcal{X}'} \left[\frac{2}{n} \sum_{i=1}^n h(\mathbf{x}'_{t,i}, t'_i) - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}'_{t,i}, t'_i) \right] \right. \\ & \quad \left. - \frac{2}{n} \sum_{i=1}^n h(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) \right] \\ &\leq \mathbb{E}_{\mathcal{X}, \mathcal{X}'} \left[\sup_{h \in \mathcal{H}} \frac{2}{n} \sum_{i=1}^n h(\mathbf{x}'_{t,i}, t'_i) - \frac{2}{n} \sum_{i=1}^n h(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}'_{t,i}, t'_i) \right. \\ & \quad \left. - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) \right] \\ &= \mathbb{E}_{\mathcal{X}, \mathcal{X}', \tau} \left[\sup_{h \in \mathcal{H}} \frac{2}{n} \sum_{i=1}^n \tau_i (h(\mathbf{x}'_{t,i}, t'_i) - h(\mathbf{x}_{t,i}, t_i)) \right. \\ & \quad \left. - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n (h^2(\mathbf{x}'_{t,i}, t'_i) + h^2(\mathbf{x}_{t,i}, t_i)) \right] \\ &\leq \mathbb{E}_{\mathcal{X}, \mathcal{X}', \tau} \left[\sup_{h \in \mathcal{H}} \left(\frac{2}{n} \sum_{i=1}^n \tau_i h(\mathbf{x}'_{t,i}, t'_i) - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}'_{t,i}, t'_i) \right) \right. \\ & \quad \left. + \sup_{h \in \mathcal{H}} \left(\frac{2}{n} \sum_{i=1}^n (-\tau_i) h(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) \right) \right] \\ &= \mathbb{E}_{\mathcal{X}, \tau} \left[\sup_{h \in \mathcal{H}} \frac{4}{n} \sum_{i=1}^n \tau_i h(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(B^2 + \frac{d(1+R)^2}{(1-T^2)^2}\right)n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) \right], \end{aligned}$$

where the second equality is due to the fact that randomly interchange of the corresponding components of \mathcal{X} and \mathcal{X}' doesn't affect the joint distribution of \mathcal{X} , \mathcal{X}' and the summation $\sum_{i=1}^n (h^2(\mathbf{x}'_{t,i}, t'_i) + h^2(\mathbf{x}_{t,i}, t_i))$, and the last equality is because $(\mathbf{x}_{t,i}, t_i)$ and $(\mathbf{x}'_{t,i}, t'_i)$ have the same distribution and the τ_i and $-\tau_i$ have the same distribution.

For any fixed \mathcal{X} , we discretize \mathcal{H} with respect to the metric

$$d_{\mathcal{X},1}(h, h') := \frac{1}{n} \sum_{i=1}^n |h(\mathbf{x}_{t,i}, t_i) - h'(\mathbf{x}_{t,i}, t_i)|.$$

Let $\mathcal{H}_\delta(\mathcal{X})$ be a δ -cover of \mathcal{H} with minimal cardinality under the distance $d_{\mathcal{X},1}$, then for any $h \in \mathcal{H}$, there exists $g \in \mathcal{H}_\delta(\mathcal{X})$ such that $\frac{1}{n} \sum_{i=1}^n |h(\mathbf{x}_{t,i}, t_i) - g(\mathbf{x}_{t,i}, t_i)| \leq \delta$. Therefore,

$$\begin{aligned} \frac{1}{n} \sum_{i=1}^n \tau_i h(\mathbf{x}_{t,i}, t_i) &\leq \frac{1}{n} \sum_{i=1}^n \tau_i g(\mathbf{x}_{t,i}, t_i) + \frac{1}{n} \sum_{i=1}^n |\tau_i| |h(\mathbf{x}_{t,i}, t_i) - g(\mathbf{x}_{t,i}, t_i)| \\ &\leq \frac{1}{n} \sum_{i=1}^n \tau_i g(\mathbf{x}_{t,i}, t_i) + \delta \end{aligned}$$

and since $|h(\mathbf{x}_{t,i}, t_i)|, |g(\mathbf{x}_{t,i}, t_i)| \leq 2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2}$,

$$\begin{aligned} \frac{1}{n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) &= \frac{1}{n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) + \frac{1}{n} \sum_{i=1}^n (h(\mathbf{x}_{t,i}, t_i) + g(\mathbf{x}_{t,i}, t_i)) (h(\mathbf{x}_{t,i}, t_i) - g(\mathbf{x}_{t,i}, t_i)) \\ &\geq \frac{1}{n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) - 2 \left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2} \right) \frac{1}{n} \sum_{i=1}^n |h(\mathbf{x}_{t,i}, t_i) - g(\mathbf{x}_{t,i}, t_i)| \\ &\geq \frac{1}{n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) - 2 \left(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2} \right) \delta. \end{aligned}$$

It follows that

$$\begin{aligned} \mathbb{E}_{\mathcal{X}} [\mathbf{I}] &\leq \mathbb{E}_{\mathcal{X}, \tau} \left[\sup_{h \in \mathcal{H}} \frac{4}{n} \sum_{i=1}^n \tau_i h(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(B^2 + \frac{d(1+R)^2}{(1-T^2)^2} \right) n} \sum_{i=1}^n h^2(\mathbf{x}_{t,i}, t_i) \right] \\ &\leq 4 \mathbb{E}_{\mathcal{X}, \tau} \left[\sup_{g \in \mathcal{H}_\delta(\mathcal{X})} \frac{1}{n} \sum_{i=1}^n \tau_i g(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(4B^2 + \frac{4d(1+R)^2}{(1-T^2)^2} \right) n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) \right] + 8\delta. \end{aligned}$$

For fixed \mathcal{X} and any $\lambda > 0$, we have

$$\begin{aligned}
 & \exp \left(\lambda \mathbb{E}_\tau \left[\sup_{g \in \mathcal{H}_\delta(\mathcal{X})} \frac{1}{n} \sum_{i=1}^n \tau_i g(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(4B^2 + \frac{4d(1+R)^2}{(1-T^2)^2}\right) n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) \right] \right) \\
 & \leq \mathbb{E}_\tau \left[\exp \left(\lambda \sup_{g \in \mathcal{H}_\delta(\mathcal{X})} \frac{1}{n} \sum_{i=1}^n \tau_i g(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(4B^2 + \frac{4d(1+R)^2}{(1-T^2)^2}\right) n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) \right) \right] \\
 & \leq \sum_{g \in \mathcal{H}_\delta(\mathcal{X})} \mathbb{E}_\tau \left[\exp \left(\frac{\lambda}{n} \sum_{i=1}^n \tau_i g(\mathbf{x}_{t,i}, t_i) - \frac{\lambda}{\left(4B^2 + \frac{4d(1+R)^2}{(1-T^2)^2}\right) n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) \right) \right] \\
 & = \sum_{g \in \mathcal{H}_\delta(\mathcal{X})} \prod_{i=1}^n \mathbb{E}_{\tau_i} \left[\exp \left(\frac{\lambda}{n} \tau_i g(\mathbf{x}_{t,i}, t_i) - \frac{\lambda}{\left(4B^2 + \frac{4d(1+R)^2}{(1-T^2)^2}\right) n} g^2(\mathbf{x}_{t,i}, t_i) \right) \right] \\
 & \leq \sum_{g \in \mathcal{H}_\delta(\mathcal{X})} \prod_{i=1}^n \exp \left(\frac{\lambda^2}{2n^2} g^2(\mathbf{x}_{t,i}, t_i) - \frac{\lambda}{\left(4B^2 + \frac{4d(1+R)^2}{(1-T^2)^2}\right) n} g^2(\mathbf{x}_{t,i}, t_i) \right),
 \end{aligned}$$

where we use Lemma 31 in the last inequality. If we take $\lambda = n/(2B^2 + \frac{2d(1+R)^2}{(1-T^2)^2})$, then

$$\begin{aligned}
 & \mathbb{E}_\tau \left[\sup_{g \in \mathcal{H}_\delta(\mathcal{X})} \frac{1}{n} \sum_{i=1}^n \tau_i g(\mathbf{x}_{t,i}, t_i) - \frac{1}{\left(4B^2 + \frac{4d(1+R)^2}{(1-T^2)^2}\right) n} \sum_{i=1}^n g^2(\mathbf{x}_{t,i}, t_i) \right] \\
 & \leq \frac{1}{\lambda} \log |\mathcal{H}_\delta(\mathcal{X})| = \frac{2}{n} \left(B^2 + \frac{d(1+R)^2}{(1-T^2)^2} \right) \log \mathcal{N}(\delta, \mathcal{H}, d_{\mathcal{X},1}).
 \end{aligned}$$

As a consequence,

$$\mathbb{E}_{\mathcal{X}} [\text{I}] \leq \frac{8}{n} \left(B^2 + \frac{d(1+R)^2}{(1-T^2)^2} \right) \mathbb{E}_{\mathcal{X}} \log \mathcal{N}(\delta, \mathcal{H}, d_{\mathcal{X},1}) + 8\delta. \quad (24)$$

• **Bound of $\mathbb{E}_{\mathcal{X}} [\text{II}]$.** For any $\mathbf{v} \in \mathcal{T}$, we have

$$\begin{aligned}
 & \mathbb{E}_{\mathcal{X}} \left[\widehat{\mathcal{L}}(\mathbf{v}) - \widehat{\mathcal{L}}(\mathbf{v}^*) \right] \\
 & = \mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \right. \\
 & \quad \left. + \frac{2}{n} \sum_{i=1}^n \left\langle \mathbf{x}_{1,i} - \frac{t_i}{\sqrt{1-t_i^2}} \mathbf{x}_{0,i} - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i), \mathbf{v}^*(\mathbf{x}_{t,i}, t_i) - \mathbf{v}(\mathbf{x}_{t,i}, t_i) \right\rangle \right] \\
 & = \mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \right],
 \end{aligned}$$

where in the last equality we use the identity from Lemma 13. Recall that $\widehat{\mathbf{v}} \in \arg \min_{\mathbf{v} \in \mathcal{T}} \widehat{\mathcal{L}}(\mathbf{v})$, we have

$$\mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \left(\|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 - \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \right) \right]$$

$$= \mathbb{E}_{\mathcal{X}} \left[\widehat{\mathcal{L}}(\widehat{\mathbf{v}}) - \widehat{\mathcal{L}}(\mathbf{v}) \right] \leq 0,$$

and subsequently

$$\begin{aligned} & \mathbb{E}_{\mathcal{X}} [\text{II}] \\ &= \mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \mathbb{1}_{\{\|\mathbf{x}_{t,i}\|_{\infty} \leq R\}} \right] \\ &= \mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \mathbb{1}_{\{\|\mathbf{x}_{t,i}\|_{\infty} \leq R\}} \right] \\ &+ \mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \left(\|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 - \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \right) \mathbb{1}_{\{\|\mathbf{x}_{t,i}\|_{\infty} \leq R\}} \right] \\ &\leq \mathbb{E}_{t, X_t} \left[\|\mathbf{v}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}_{\{\|X_t\|_{\infty} \leq R\}} \right] \\ &+ \mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \left(\|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 - \|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \right) \mathbb{1}_{\{\|\mathbf{x}_{t,i}\|_{\infty} > R\}} \right]. \end{aligned} \tag{25}$$

On the one hand, for any $\mathbf{v} \in \mathcal{T}$, we have

$$\begin{aligned} & \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \\ &\leq 2 \|\mathbf{v}(\mathbf{x}_{t,i}, t_i)\|^2 + 2 \|\mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \\ &\leq 2B^2 + \frac{4d}{(1-t_i^2)^2} + \frac{4t_i^2}{(1-t_i^2)^2} \|\mathbf{x}_{t,i}\|^2 \\ &= 2B^2 + \frac{4d}{(1-t_i^2)^2} + \frac{4t_i^2}{(1-t_i^2)^2} \left\| t_i \mathbf{x}_{1,i} + \sqrt{1-t_i^2} \mathbf{x}_{0,i} \right\|^2 \\ &\leq 2B^2 + \frac{4d}{(1-t_i^2)^2} + \frac{4t_i^2}{(1-t_i^2)^2} \left(2t_i^2 \|\mathbf{x}_{1,i}\|^2 + 2(1-t_i^2) \|\mathbf{x}_{0,i}\|^2 \right) \\ &\leq 2B^2 + \frac{4d}{(1-T^2)^2} + \frac{4}{(1-T^2)^2} \left(2d + 2 \|\mathbf{x}_{0,i}\|^2 \right) \\ &= 2B^2 + \frac{12d}{(1-T^2)^2} + \frac{8}{(1-T^2)^2} \|\mathbf{x}_{0,i}\|^2. \end{aligned} \tag{26}$$

On the other hand, since $\|\mathbf{x}_{t,i}\|_{\infty} \leq t_i \|\mathbf{x}_{1,i}\|_{\infty} + \sqrt{1-t_i^2} \|\mathbf{x}_{0,i}\|_{\infty} \leq 1 + \|\mathbf{x}_{0,i}\|_{\infty}$, we have

$$\{\|\mathbf{x}_{t,i}\|_{\infty} > R\} \subseteq \{\|\mathbf{x}_{0,i}\|_{\infty} > R-1\}. \tag{27}$$

Denote the k -coordinate of $\mathbf{x}_{0,i}$ by $x_{0,i}^{(k)}$, we have the following upper bound for the tail probability:

$$\begin{aligned}
 \mathbb{P}(\|\mathbf{x}_{0,i}\|_\infty > R-1) &= \mathbb{P}\left(\max_{k=1,\dots,d} |x_{0,i}^{(k)}| > R-1\right) \\
 &= \mathbb{P}\left(\bigcup_{k=1}^d \{|x_{0,i}^{(k)}| > R-1\}\right) \\
 &\leq \sum_{k=1}^d \mathbb{P}\left(|x_{0,i}^{(k)}| > R-1\right) \\
 &\leq 2d \exp\left(-\frac{(R-1)^2}{2}\right).
 \end{aligned} \tag{28}$$

Combining (26), (27), (28) and the Cauchy-Schwartz inequality, we obtain

$$\begin{aligned}
 &\mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \left(\|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 - \|\widehat{\mathbf{v}}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\|^2 \right) \mathbb{1}\{\|\mathbf{x}_{t,i}\|_\infty > R\} \right] \\
 &\leq \mathbb{E}_{\mathcal{X}} \left[\frac{1}{n} \sum_{i=1}^n \left(4B^2 + \frac{24d}{(1-T^2)^2} + \frac{16}{(1-T^2)^2} \|\mathbf{x}_{0,i}\|^2 \right) \mathbb{1}\{\|\mathbf{x}_{0,i}\|_\infty > R-1\} \right] \\
 &= \frac{1}{n} \sum_{i=1}^n \left(4B^2 + \frac{24d}{(1-T^2)^2} \right) \mathbb{E}_{\mathbf{x}_{0,i}} [\mathbb{1}\{\|\mathbf{x}_{0,i}\|_\infty > R-1\}] \\
 &\quad + \frac{1}{n} \sum_{i=1}^n \frac{16}{(1-T^2)^2} \mathbb{E}_{\mathbf{x}_{0,i}} [\|\mathbf{x}_{0,i}\|^2 \mathbb{1}\{\|\mathbf{x}_{0,i}\|_\infty > R-1\}] \\
 &\leq \frac{1}{n} \sum_{i=1}^n \left(4B^2 + \frac{24d}{(1-T^2)^2} \right) \mathbb{P}(\|\mathbf{x}_{0,i}\|_\infty > R-1) \\
 &\quad + \frac{1}{n} \sum_{i=1}^n \frac{16}{(1-T^2)^2} \mathbb{E}_{\mathbf{x}_{0,i}} [\|\mathbf{x}_{0,i}\|^4]^{1/2} \mathbb{P}(\|\mathbf{x}_{0,i}\|_\infty > R-1)^{1/2} \\
 &\leq \left(8dB^2 + \frac{48d^2}{(1-T^2)^2} \right) \exp\left(-\frac{(R-1)^2}{2}\right) + \frac{48d^2}{(1-T^2)^2} \exp\left(-\frac{(R-1)^2}{4}\right) \\
 &\leq \left(8dB^2 + \frac{96d^2}{(1-T^2)^2} \right) \exp\left(-\frac{(R-1)^2}{4}\right).
 \end{aligned}$$

Substituting into (25) and taking the infimum over all $\mathbf{v} \in \mathcal{T}$, we have

$$\begin{aligned}
 \mathbb{E}_{\mathcal{X}} [\text{II}] &\leq \inf_{\mathbf{v} \in \mathcal{T}} \mathbb{E}_{t, X_t} \left[\|\mathbf{v}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty \leq R\} \right] \\
 &\quad + \left(8dB^2 + \frac{96d^2}{(1-T^2)^2} \right) \exp\left(-\frac{(R-1)^2}{4}\right).
 \end{aligned} \tag{29}$$

• **Bound of III.** Similarly, we have

$$\begin{aligned}
 \text{III} &= \mathbb{E}_{t, X_t} \left[\|\widehat{\mathbf{v}}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty > R\} \right] \\
 &\leq \mathbb{E}_{X_0} \left[\left(2B^2 + \frac{12d}{(1-T^2)^2} + \frac{8}{(1-T^2)^2} \|X_0\|^2 \right) \mathbb{1}\{\|X_0\|_\infty > R-1\} \right] \\
 &\leq \left(2B^2 + \frac{12d}{(1-T^2)^2} \right) \mathbb{P}(\|X_0\|_\infty > R-1) \\
 &\quad + \frac{8}{(1-T^2)^2} \mathbb{E}_{X_0}[\|X_0\|^4]^{1/2} \mathbb{P}(\|X_0\|_\infty > R-1)^{1/2} \\
 &\leq \left(4dB^2 + \frac{24d^2}{(1-T^2)^2} \right) \exp\left(-\frac{(R-1)^2}{2}\right) + \frac{24d^2}{(1-T^2)^2} \exp\left(-\frac{(R-1)^2}{4}\right) \\
 &\leq \left(4dB^2 + \frac{48d^2}{(1-T^2)^2} \right) \exp\left(-\frac{(R-1)^2}{4}\right).
 \end{aligned} \tag{30}$$

Combining Corollary 12, (24), (29), (30) and Lemma 29, we get

$$\begin{aligned}
 &\mathbb{E}_{\mathcal{X}} [\mathcal{L}(\widehat{\mathbf{v}}) - \mathcal{L}(\mathbf{v}^*)] \\
 &= \mathbb{E}_{\mathcal{X}} [\text{I}] + 3\mathbb{E}_{\mathcal{X}} [\text{II}] + \text{III} \\
 &\leq \frac{8}{n} \left(B^2 + \frac{d(1+R)^2}{(1-T^2)^2} \right) \mathbb{E}_{\mathcal{X}} \log \mathcal{N}(\delta, \mathcal{H}, d_{\mathcal{X},1}) + 8\delta \\
 &\quad + 3 \inf_{v \in \mathcal{T}} \mathbb{E}_{t, X_t} \left[\|\mathbf{v}(X_t, t) - \mathbf{v}^*(X_t, t)\|^2 \mathbb{1}\{\|X_t\|_\infty \leq R\} \right] \\
 &\quad + \left(28dB^2 + \frac{336d^2}{(1-T^2)^2} \right) \exp\left(-\frac{(R-1)^2}{4}\right) \\
 &= \mathcal{O} \left(\frac{1}{n} \left(B^2 + \frac{(1+R)^2}{(1-T)^2} \right) N^2 J \log(\max\{N, h, d_k, d_v, d_{ff}\}) \log \frac{n(B^2 + \frac{(1+R)B}{1-T})}{\delta} \right. \\
 &\quad \left. + \delta + \varepsilon^2 + \left(B^2 + \frac{1}{(1-T)^2} \right) \exp\left(-\frac{(R-1)^2}{4}\right) \right).
 \end{aligned}$$

• **Balancing error terms.** Based on our choice of \mathcal{T} in Corollary 12, setting $\varepsilon = n^{-\frac{1}{d+3}}$, $\delta = \varepsilon^2$ and $R = \sqrt{\frac{8}{d+3} \log n} + 1$ gives rise to

$$\mathbb{E}_{\mathcal{X}} [\mathcal{L}(\widehat{\mathbf{v}}) - \mathcal{L}(\mathbf{v}^*)] = \widetilde{\mathcal{O}} \left(\frac{1}{(1-T)^{3d+5}} n^{-\frac{2}{d+3}} \right),$$

where we omit factors in $d, \log n, \log(1-T)$. ■

B.2 Covering number evaluation

Lemma 29 $\sup_{\mathcal{X}} \log \mathcal{N}(\delta, \mathcal{H}, d_{\mathcal{X},1}) = \mathcal{O}(N^2 J \log(\max\{N, h, d_k, d_v, d_{ff}\}) \log \frac{n(B^2 + \frac{(1+R)B}{1-T})}{\delta})$, where $d_{\mathcal{X},1}(h, h') = \frac{1}{n} \sum_{i=1}^n |h(\mathbf{x}_{t,i}, t_i) - h'(\mathbf{x}_{t,i}, t_i)|$.

Proof Denote the i -coordinate of \mathbf{v} by $v^{(i)}$ and define $\mathcal{T}^{(i)} := \{v^{(i)} : \mathbf{v} \in \mathcal{T}\}$. Let $\delta > 0$. Denote by $\{v_k^{(i)}\}_{k=1}^{\mathcal{N}^{(i)}}$ the centers of a minimal $\delta/(2d(d+1)B + \frac{4d^{3/2}(1+R)}{1-T^2})$ -covering of $\mathcal{T}^{(i)}$ with respect to the metric

$$d_{\mathcal{X},1}(v^{(i)}, v^{(i)'}) = \frac{1}{n} \sum_{i=1}^n \left| v^{(i)}(\mathbf{x}_{t,i}, t_i) - v^{(i)' }(\mathbf{x}_{t,i}, t_i) \right|.$$

Triangle inequality gives that for each $v_k^{(i)}$ there exists a $\tilde{v}_k^{(i)} \in \mathcal{T}^{(i)}$ such that $\{\tilde{v}_k^{(i)}\}_{k=1}^{\mathcal{N}^{(i)}}$ is an *interior* $\delta/(d(d+1)B + \frac{2d^{3/2}(1+R)}{1-T^2})$ -cover of $\mathcal{T}^{(i)}$. For any $h \in \mathcal{H}$ with $h(\mathbf{x}_t, t) = \|\mathbf{v}(\mathbf{x}_t, t) - \mathbf{v}^*(\mathbf{x}_t, t)\|^2 \mathbb{1}\{\|\mathbf{x}_t\|_\infty \leq R\}$, where $\mathbf{v} \in \mathcal{T}$, by the cover property of each component, there exists a $k_i \in \{1, \dots, \mathcal{N}^{(i)}\}$ such that $d_{\mathcal{X},1}(v^{(i)}, \tilde{v}_{k_i}^{(i)}) \leq \delta/(d(d+1)B + \frac{2d^{3/2}(1+R)}{1-T^2})$. We denote h_k as determined by $\mathbf{v}_k := (\tilde{v}_{k_1}^{(1)}, \dots, \tilde{v}_{k_d}^{(d)})$. Then we have

$$\begin{aligned} & d_{\mathcal{X},1}(h, h_k) \\ &= \frac{1}{n} \sum_{i=1}^n |h(\mathbf{x}_{t,i}, t_i) - h_k(\mathbf{x}_{t,i}, t_i)| \\ &= \frac{1}{n} \sum_{i=1}^n |\langle \mathbf{v}(\mathbf{x}_{t,i}, t_i) + \mathbf{v}_k(\mathbf{x}_{t,i}, t_i) - 2\mathbf{v}^*(\mathbf{x}_{t,i}, t_i), \mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}_k(\mathbf{x}_{t,i}, t_i) \rangle| \mathbb{1}\{\|\mathbf{x}_{t,i}\|_\infty \leq R\} \\ &\leq \frac{1}{n} \sum_{i=1}^n \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) + \mathbf{v}_k(\mathbf{x}_{t,i}, t_i) - 2\mathbf{v}^*(\mathbf{x}_{t,i}, t_i)\| \cdot \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}_k(\mathbf{x}_{t,i}, t_i)\| \mathbb{1}\{\|\mathbf{x}_{t,i}\|_\infty \leq R\} \\ &\leq \left((d+1)B + \frac{2\sqrt{d}(1+R)}{1-T^2} \right) \frac{1}{n} \sum_{i=1}^n \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}_k(\mathbf{x}_{t,i}, t_i)\| \\ &\leq \left((d+1)B + \frac{2\sqrt{d}(1+R)}{1-T^2} \right) \frac{1}{n} \sum_{i=1}^n \|\mathbf{v}(\mathbf{x}_{t,i}, t_i) - \mathbf{v}_k(\mathbf{x}_{t,i}, t_i)\|_1 \\ &= \left((d+1)B + \frac{2\sqrt{d}(1+R)}{1-T^2} \right) \sum_{i=1}^d d_{\mathcal{X},1}(v^{(i)}, \tilde{v}_{k_i}^{(i)}) \\ &\leq \delta, \end{aligned}$$

where in the first inequality we use the Cauchy-Schwartz inequality, in the third inequality we use $\|\cdot\| \leq \|\cdot\|_1$, and in the third equality we rearrange the order of summation. It follows that $\{h_k\}$ forms a δ -covering of \mathcal{H} . Hence,

$$\mathcal{N}(\delta, \mathcal{H}, d_{\mathcal{X},1}) \leq \prod_{i=1}^d \mathcal{N}\left(\frac{\delta}{2d(d+1)B + \frac{4d^{3/2}(1+R)}{1-T^2}}, \mathcal{T}^{(i)}, d_{\mathcal{X},1}\right).$$

Using the fact that $\mathcal{T}^{(i)} \subseteq \mathcal{T}_{d+1,1}(N, h, d_k, d_v, d_{ff}, B, J, \gamma)$ and $d_{\mathcal{X},1}(f, f') \leq d_{\mathcal{X},\infty}(f, f')$ for any f, f' , we obtain

$$\log \mathcal{N}(\delta, \mathcal{H}, d_{\mathcal{X},1})$$

$$\begin{aligned}
&\leq \sum_{i=1}^d \log \mathcal{N} \left(\frac{\delta}{2d(d+1)B + \frac{4d^{3/2}(1+R)}{1-T^2}}, \mathcal{T}^{(i)}, d_{\mathcal{X},1} \right) \\
&\leq \sum_{i=1}^d \log \mathcal{N} \left(\frac{\delta}{2d(d+1)B + \frac{4d^{3/2}(1+R)}{1-T^2}}, \mathcal{T}_{d+1,1}(N, h, d_k, d_v, d_{ff}, B, J, \gamma), d_{\mathcal{X},\infty} \right) \\
&\leq c_{10} N^2 J \log(\max\{N, h, d_k, d_v, d_{ff}\}) \log \frac{n \left(B^2 + \frac{(1+R)B}{1-T} \right)}{\delta},
\end{aligned}$$

where in the last inequality we use Lemma 30. ■

Lemma 30 *Let $\mathcal{X} = \{\mathbf{x}_1, \dots, \mathbf{x}_n\}$. Then $\sup_{\mathcal{X}} \log \mathcal{N}(\delta, \mathcal{T}_{d,1}(N, h, d_k, d_v, d_{ff}, B, J, \gamma), d_{\mathcal{X},\infty}) = \mathcal{O}(N^2 J \log(\max\{N, h, d_k, d_v, d_{ff}\}) \log \frac{Bn}{\delta})$, where $d_{\mathcal{X},\infty}(\phi, \phi') = \max_{i=1, \dots, n} |\phi(\mathbf{x}_i) - \phi'(\mathbf{x}_i)|$.*

Proof For simplicity, let $\mathcal{T}_{d,1}$ denote $\mathcal{T}_{d,1}(N, h, d_k, d_v, d_{ff}, B, J, \gamma)$. We initially establish an upper bound on the pseudo-dimension of subsets of $\mathcal{T}_{d,1}$, specifically focusing on those subsets where the nonzero components are fixed in position. Subsequently, leveraging known results enables us to control the covering number via the pseudo-dimension. The proof is a modification of the proof of Lemma 8 in Gurevych et al. (2022) and Theorem 6 in Bartlett et al. (2019).

Based on the definition of $\mathcal{T}_{d,1}$, in all parameters determining a function $v \in \mathcal{T}_{d,1}$, only at most J components are permitted to be nonzero. We fix the positions of these nonzero parameters and denote by $\boldsymbol{\theta}$ the vector in \mathbb{R}^J comprising all potential nonzero parameter values. Then define

$$\mathcal{V} = \left\{ v(\cdot, \boldsymbol{\theta}) : \mathbb{R}^d \rightarrow \mathbb{R} : \boldsymbol{\theta} \in \mathbb{R}^J \right\}.$$

To estimate the pseudo-dimension of \mathcal{V} , denoted as $\text{Pdim}(\mathcal{V})$, we consider a set of points $(\mathbf{x}_1, y_1), \dots, (\mathbf{x}_m, y_m) \in \mathbb{R}^d \times \mathbb{R}$ that satisfy

$$|\{(\text{sgn}(v(\mathbf{x}_1, \boldsymbol{\theta}) - y_1), \dots, \text{sgn}(v(\mathbf{x}_m, \boldsymbol{\theta}) - y_m)) : v \in \mathcal{V}\}| = 2^m.$$

It suffices to bound m .

We view the parameters as the variables for any network $v \in \mathcal{V}$ when input is fixed. In the following, we construct a sequence of partitions $\mathcal{P}_0, \mathcal{P}_1, \dots, \mathcal{P}_{N+1}$ of \mathbb{R}^J by successive refinement such that in the last partition for all $S \in \mathcal{P}_{N+1}$ we have

$$v(\mathbf{x}_1, \boldsymbol{\theta}), \dots, v(\mathbf{x}_m, \boldsymbol{\theta})$$

are polynomials as functions of $\boldsymbol{\theta}$ of degree at most 9^{N+2} for $\boldsymbol{\theta} \in S$. Then application of Lemma 32 and Lemma 33 yields an upper bound for m .

To begin with, set $\mathcal{P}_0 = \{\mathbb{R}^J\}$. As defined in (2), all components of Z_0 are polynomials as functions of $\boldsymbol{\theta}$ of degree at most $1 \leq 9$ in $\boldsymbol{\theta}$ for $\boldsymbol{\theta} \in \mathbb{R}^J$. Let $r \in \{1, \dots, N\}$ and assume that for all $S \in \mathcal{P}_{r-1}$ all components in Z_{r-1} are polynomials as functions of $\boldsymbol{\theta}$ of degree at most 9^r in $\boldsymbol{\theta}$ for $\boldsymbol{\theta} \in S$. Then all components in

$$\mathbf{q}_{r-1,s,i} := W_{Q,r,s} \mathbf{z}_{r-1,i} \quad \text{and} \quad \mathbf{k}_{r-1,s,i} := W_{K,r,s} \mathbf{z}_{r-1,i}$$

are polynomials of degree at most $9^r + 1$ on each set $S \in \mathcal{P}_{r-1}$. Consequently, for $S \in \mathcal{P}_{r-1}$,

$$\langle \mathbf{q}_{r-1,s,i}, \mathbf{k}_{r-1,s,j} \rangle$$

is a polynomial of degree at most $2 \cdot 9^r + 2$ for $\theta \in S$. Application of Lemma 32 yields that

$$\langle \mathbf{q}_{r-1,s,i}, \mathbf{k}_{r-1,s,j_1} \rangle - \langle \mathbf{q}_{r-1,s,i}, \mathbf{k}_{r-1,s,j_2} \rangle \quad (s \in \{1, \dots, h\}, i, j_1, j_2 \in \{1, \dots, l\})$$

has at most

$$\Delta_1 = 2 \left(\frac{2ehl^3(2 \cdot 9^r + 2)}{J} \right)^J$$

difference sign patterns. If we partition in each set in \mathcal{P}_{r-1} according to these sign patterns in Δ_1 subsets such that all these polynomials have the same signs within each refined region, then on each set in the new partition all elements in

$$\left((W_{K,r,s} z_{r-1})^\top (W_{Q,r,s} z_{r-1}) \right) \odot \sigma_H \left((W_{K,r,s} z_{r-1})^\top (W_{Q,r,s} z_{r-1}) \right)$$

are fixed polynomials of degree at most $2 \cdot 9^r + 2$, indicating that all components in

$$Y_r = F^{(SA)}(Z_{r-1})$$

are polynomials of degree at most $3 \cdot 9^r + 4$ on each refined region. On each set within the new partition every component of

$$W_{r,1} Y_r + \mathbf{b}_{r,1} \mathbb{1}_l^\top$$

is a polynomial of degree at most $3 \cdot 9^r + 5$. By applying Lemma 32 once again, we can refine each set in this partition into

$$\Delta_2 = 2 \left(\frac{2ed_{ff}(3 \cdot 9^r + 5)}{J} \right)^J$$

sets such that all components in $W_{r,1} Y_r + \mathbf{b}_{r,1} \mathbb{1}_l^\top$ have the same sign patterns within the refined partition. We refer to the partition obtained by refining \mathcal{P}_{r-1} twice as \mathcal{P}_r . Since on each set of \mathcal{P}_r the sign of all components does not change, we can conclude that all components in

$$\sigma \left(W_{r,1} Y_r + \mathbf{b}_{r,1} \mathbb{1}_l^\top \right)$$

are either equal to zero or equal to a polynomial of degree at most $3 \cdot 9^r + 5$. Consequently we have on each set in \mathcal{P}_r all components of

$$Z_r = F^{(FF)}(Y_r)$$

are equal to a polynomial of degree at most $3 \cdot 9^r + 6 \leq 9^{r+1}$.

Proceeding in this way we obtain a partition \mathcal{P}_N of \mathbb{R}^J such that on each set $S \in \mathcal{P}_N$ all components of

$$Z_N$$

are fixed polynomials of $\boldsymbol{\theta} \in S$ of degree no more than 9^{N+1} , and hence for all $k \in \{1, \dots, m\}$

$$v(\mathbf{x}_k, \boldsymbol{\theta}) - y_k$$

are polynomials of degree at most $9^{N+1} + 1 \leq 9^{N+2}$ in $\boldsymbol{\theta}$ for $\boldsymbol{\theta} \in S$.

According to the refinement process, we have

$$|\mathcal{P}_N| = \prod_{r=1}^N \frac{|\mathcal{P}_r|}{|\mathcal{P}_{r-1}|} \leq \prod_{r=1}^N 2 \left(\frac{2ehl^3(2 \cdot 9^r + 2)}{J} \right)^J \cdot 2 \left(\frac{2ed_{ff}(3 \cdot 9^r + 5)}{J} \right)^J.$$

Using that

$$\begin{aligned} & |\{(\text{sgn}(v(\mathbf{x}_1, \boldsymbol{\theta}) - y_1), \dots, \text{sgn}(v(\mathbf{x}_m, \boldsymbol{\theta}) - y_m)) : v \in \mathcal{V}\}| \\ & \leq \sum_{S \in \mathcal{P}_N} |\{(\text{sgn}(v(\mathbf{x}_1, \boldsymbol{\theta}) - y_1), \dots, \text{sgn}(v(\mathbf{x}_m, \boldsymbol{\theta}) - y_m)) : \boldsymbol{\theta} \in S\}|, \end{aligned}$$

we apply Lemma 32 and obtain

$$\begin{aligned} 2^m &= |\{(\text{sgn}(v(\mathbf{x}_1, \boldsymbol{\theta}) - y_1), \dots, \text{sgn}(v(\mathbf{x}_m, \boldsymbol{\theta}) - y_m)) : v \in \mathcal{V}\}| \\ &\leq |\mathcal{P}_N| \cdot 2 \left(\frac{2em9^{N+2}}{J} \right)^J \\ &\leq 2 \left(\frac{2em9^{N+2}}{J} \right)^J \cdot \prod_{r=1}^N 2 \left(\frac{2ehl^3(2 \cdot 9^r + 2)}{J} \right)^J \cdot 2 \left(\frac{2ed_{ff}(3 \cdot 9^r + 5)}{J} \right)^J \\ &\leq 2^{2N+1} \left(\frac{m6e \max\{hl^3, d_{ff}\} 9^{N+2}}{(2N+1)J} \right)^{(2N+1)J}. \end{aligned}$$

Assume $m \geq (2N+1)J$. Due to Lemma 33, we have

$$\begin{aligned} m &\leq (2N+1) + (2N+1)J \log_2(12e \max\{hl^3, d_{ff}\} 9^{N+2} \log_2(6e \max\{hl^3, d_{ff}\} 9^{N+2})) \\ &\leq c_{11} N^2 J \log(\max\{h, d_{ff}\}), \end{aligned}$$

which implies

$$\text{Pdim}(\mathcal{V}) \leq c_{11} N^2 J \log(\max\{h, d_{ff}\}).$$

For any fixed $\mathcal{X} = \{\mathbf{y}_i\}_{i=1}^n$, since $\{(v(\mathbf{y}_1), \dots, v(\mathbf{y}_n)) : v \in \mathcal{V}\} \subseteq \{\mathbf{x} \in \mathbb{R}^n : \|\mathbf{x}\|_\infty \leq B\}$ can be covered by at most $\lceil \frac{2B}{\delta} \rceil^n$ balls with radius δ in $\|\cdot\|_\infty$ distance, we always have $\mathcal{N}(\delta, \mathcal{V}, d_{\mathcal{X}, \infty}) \leq \lceil \frac{2B}{\delta} \rceil^n$. By Theorem 12.2 in Anthony et al. (1999), the covering number $\mathcal{N}(\delta, \mathcal{V}, d_{\mathcal{X}, \infty})$ can be bounded by the pseudo-dimension $\text{Pdim}(\mathcal{V})$ through

$$\mathcal{N}(\delta, \mathcal{V}, d_{\mathcal{X}, \infty}) \leq \left(\frac{2eBn}{\delta \text{Pdim}(\mathcal{V})} \right)^{\text{Pdim}(\mathcal{V})}$$

if $n \geq \text{Pdim}(\mathcal{V})$. In any cases,

$$\log \mathcal{N}(\delta, \mathcal{V}, d_{\mathcal{X}, \infty}) \leq \text{Pdim}(\mathcal{V}) \log \frac{2eBn}{\delta}.$$

The functions in the function set $\mathcal{T}_{d,1}$ depend on at most $c_{12}Nh^2(\max\{d_k, d_v, d_{ff}\})^3$ many parameters, and of these parameters at most J are allowed to be nonzero. It follows that the number of possible ways to select these positions is given by

$$\binom{c_{12}Nh^2(\max\{d_k, d_v, d_{ff}\})^3}{J} \leq \left(c_{12}Nh^2(\max\{d_k, d_v, d_{ff}\})^3\right)^J.$$

Fixing these positions delineates a specific function space \mathcal{V} . From this we can conclude

$$\begin{aligned} & \log \mathcal{N}(\delta, \mathcal{T}_{d,1}, d_{\mathcal{X},\infty}) \\ & \leq J \log \left(c_{12}Nh^2(\max\{d_k, d_v, d_{ff}\})^3\right) + c_{11}N^2J \log(\max\{h, d_{ff}\}) \log \frac{2eBn}{\delta} \\ & \leq c_{13}N^2J \log(\max\{N, h, d_k, d_v, d_{ff}\}) \log \frac{Bn}{\delta}. \end{aligned}$$

Taking the supremum over \mathcal{X} completes the proof. \blacksquare

B.3 Auxiliary lemma

Lemma 31 *Given a Rademacher random variable σ takes the values $\{-1, 1\}$ equiprobably. We have, for any $\lambda \in \mathbb{R}$, $\mathbb{E}_\sigma[e^{\lambda\sigma}] \leq e^{\lambda^2/2}$.*

Proof By taking expectations and using the power-series expansion for the exponential, we obtain

$$\begin{aligned} \mathbb{E}_\sigma[e^{\lambda\sigma}] &= \frac{1}{2}(e^{-\lambda} + e^\lambda) = \frac{1}{2} \left(\sum_{k=0}^{\infty} \frac{(-\lambda)^k}{k!} + \sum_{k=0}^{\infty} \frac{(\lambda)^k}{k!} \right) \\ &= \sum_{k=0}^{\infty} \frac{\lambda^{2k}}{(2k)!} \\ &\leq 1 + \sum_{k=1}^{\infty} \frac{\lambda^{2k}}{2^k k!} \\ &= e^{\lambda^2/2}. \end{aligned}$$

It concludes the proof. \blacksquare

Lemma 32 (Anthony et al. (1999), Theorem 8.3) *Suppose $W \leq m$ and let f_1, \dots, f_m be polynomials of degree at most D in W variables. Define*

$$K := \left| \left\{ (\text{sgn}(f_1(\mathbf{x})), \dots, \text{sgn}(f_m(\mathbf{x}))) : \mathbf{x} \in \mathbb{R}^W \right\} \right|.$$

Then

$$K \leq 2 \left(\frac{2emD}{W} \right)^W.$$

Lemma 33 (Bartlett et al. (2019), Lemma 16) *Suppose that $2^m \leq 2^L(mR/w)^w$ for some $R \geq 16$ and $m \geq w \geq L \geq 0$. Then,*

$$m \leq L + w \log_2(2R \log_2 R).$$

Appendix C. Discretization Analysis

C.1 Estimation Error

Consider the target continuous flow

$$dX_t(\mathbf{x}) = \mathbf{v}^*(X_t(\mathbf{x}), t) dt, \quad X_0(\mathbf{x}) = \mathbf{x} \sim \pi_0, \quad 0 \leq t \leq T, \quad (31)$$

and the estimated continuous flow

$$d\tilde{X}_t(\mathbf{x}) = \hat{\mathbf{v}}(\tilde{X}_t(\mathbf{x}), t) dt, \quad \tilde{X}_0(\mathbf{x}) = \mathbf{x} \sim \pi_0, \quad 0 \leq t \leq T. \quad (32)$$

Denote the distribution of $X_t(\mathbf{x})$ and $\tilde{X}_t(\mathbf{x})$ by π_t and $\tilde{\pi}_t$, respectively. We have the following estimate of the Wasserstein-2 distance $W_2(\pi_T, \tilde{\pi}_T)$.

Proposition 34 *Suppose Assumption 3 holds. Given n samples $\mathcal{X} = \{\mathbf{x}_{1,i}, \mathbf{x}_{0,i}, t_i\}_{i=1}^n$ from π_1, π_0 and $\text{Unif}[0, T]$, we choose neural network as in Theorem 14. Then*

$$\mathbb{E}_{\mathcal{X}} [W_2(\pi_T, \tilde{\pi}_T)] = \tilde{\mathcal{O}} \left(e^{\gamma_{\mathbf{x}}} (1-T)^{-\frac{3d+5}{2}} n^{-\frac{1}{d+3}} \right).$$

Proof Since $X_t(\mathbf{x})$ and $\tilde{X}_t(\mathbf{x})$ form a coupling of π_t and $\tilde{\pi}_t$, by the definition of Wasserstein-2 distance, we have

$$W_2^2(\pi_t, \tilde{\pi}_t) \leq \int_{\mathbb{R}^d} \|X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x})\|^2 \pi_0(\mathbf{x}) d\mathbf{x},$$

where X_t is the flow map solution of (31) with the exact \mathbf{v}^* defined in (6) and \tilde{X}_t is the flow map solution of (32). Now, we consider the evolution of

$$R_t := \int_{\mathbb{R}^d} \|X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x})\|^2 \pi_0(\mathbf{x}) d\mathbf{x}.$$

Differentiating on both sides, we get

$$\begin{aligned} \frac{dR_t}{dt} &= 2 \int_{\mathbb{R}^d} \left\langle \mathbf{v}^*(X_t(\mathbf{x}), t) - \hat{\mathbf{v}}(\tilde{X}_t(\mathbf{x}), t), X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x} \\ &= 2 \int_{\mathbb{R}^d} \left\langle \mathbf{v}^*(X_t(\mathbf{x}), t) - \hat{\mathbf{v}}(X_t(\mathbf{x}), t) + \hat{\mathbf{v}}(X_t(\mathbf{x}), t) - \hat{\mathbf{v}}(\tilde{X}_t(\mathbf{x}), t), X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x}. \end{aligned} \quad (33)$$

Using the inequality $2\langle a, b \rangle \leq \|a\|^2 + \|b\|^2$, we have

$$\begin{aligned} &2 \left\langle \mathbf{v}^*(X_t(\mathbf{x}), t) - \hat{\mathbf{v}}(X_t(\mathbf{x}), t), X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x}) \right\rangle \\ &\leq \|\mathbf{v}^*(X_t(\mathbf{x}), t) - \hat{\mathbf{v}}(X_t(\mathbf{x}), t)\|^2 + \|X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x})\|^2. \end{aligned} \quad (34)$$

Since $\hat{\mathbf{v}} \in \mathcal{T}$ defined in Theorem 14 is $\gamma_{\mathbf{x}}$ -Lipschitz continuous w.r.t. \mathbf{x} , the Cauchy-Schwartz inequality implies

$$2 \left\langle \hat{\mathbf{v}}(X_t(\mathbf{x}), t) - \hat{\mathbf{v}}(\tilde{X}_t(\mathbf{x}), t), X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x}) \right\rangle \leq 2\gamma_{\mathbf{x}} \|X_t(\mathbf{x}) - \tilde{X}_t(\mathbf{x})\|^2. \quad (35)$$

Combining (33), (34) and (35), we obtain

$$\frac{dR_t}{dt} \leq (1 + 2\gamma_{\mathbf{x}}) R_t + \int_{\mathbb{R}^d} \|\mathbf{v}^*(X_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(X_t(\mathbf{x}), t)\|^2 \pi_0(\mathbf{x}) d\mathbf{x}.$$

Therefore, by Lemma 37 and since $R_0 = 0$, we deduce

$$\begin{aligned} R_T &\leq e^{1+2\gamma_{\mathbf{x}}} \int_0^T \int_{\mathbb{R}^d} \|\mathbf{v}^*(X_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(X_t(\mathbf{x}), t)\|^2 \pi_0(\mathbf{x}) d\mathbf{x} dt \\ &= e^{1+2\gamma_{\mathbf{x}}} \int_0^T \|\mathbf{v}^*(\cdot, t) - \widehat{\mathbf{v}}(\cdot, t)\|_{L^2(\pi_t)}^2 dt. \end{aligned}$$

By Theorem 14 and Jensen's inequality, we get the desired result. \blacksquare

C.2 Discretization Error

Now we consider the gap between estimated continuous flow and its discretization:

$$\begin{aligned} d\widetilde{X}_t(\mathbf{x}) &= \widehat{\mathbf{v}}(\widetilde{X}_t(\mathbf{x}), t) dt, \quad \widetilde{X}_0(\mathbf{x}) = \mathbf{x} \sim \pi_0, \quad 0 \leq t \leq T, \\ d\widehat{X}_t(\mathbf{x}) &= \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t_k) dt, \quad t_k \leq t \leq t_{k+1}, \quad k = 0, 1, \dots, N-1, \quad \widehat{X}_0(\mathbf{x}) = \mathbf{x} \sim \pi_0. \end{aligned}$$

Denote the distribution of $\widetilde{X}_t(\mathbf{x})$ and $\widehat{X}_t(\mathbf{x})$ by $\widetilde{\pi}_t$ and $\widehat{\pi}_t$, respectively.

Lemma 35 *Let $0 = t_0 < t_1 < \dots < t_N = T$ be the discretization points. For any neural network $\widehat{\mathbf{v}}$ in \mathcal{T} defined in (8), we have*

$$W_2(\widetilde{\pi}_T, \widehat{\pi}_T) = \mathcal{O} \left(e^{\gamma_{\mathbf{x}}(\gamma_{\mathbf{x}} B + \gamma_t)} \sqrt{\sum_{k=0}^{N-1} (t_{k+1} - t_k)^3} \right).$$

Proof By the same argument as in the proof of Proposition 34, we have

$$W_2^2(\widetilde{\pi}_t, \widehat{\pi}_t) \leq \int_{\mathbb{R}^d} \|\widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x})\|^2 \pi_0(\mathbf{x}) d\mathbf{x}.$$

Now, we consider the evolution of

$$L_t := \int_{\mathbb{R}^d} \|\widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x})\|^2 \pi_0(\mathbf{x}) d\mathbf{x}.$$

Since $\widehat{X}_t(\mathbf{x})$ is piece-wise linear, we consider the evolution of L_t on each split interval $[t_k, t_{k+1}]$. On interval $[t_k, t_{k+1}]$, we have

$$\begin{aligned} \frac{dL_t}{dt} &= \int_{\mathbb{R}^d} 2 \left\langle \widehat{\mathbf{v}}(\widetilde{X}_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t_k), \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x} \\ &= \int_{\mathbb{R}^d} 2 \left\langle \widehat{\mathbf{v}}(\widetilde{X}_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_t(\mathbf{x}), t), \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x} \end{aligned} \quad (36)$$

$$+ \int_{\mathbb{R}^d} 2 \left\langle \widehat{\mathbf{v}}(\widehat{X}_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t), \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x} \quad (37)$$

$$+ \int_{\mathbb{R}^d} 2 \left\langle \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t_k), \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x}. \quad (38)$$

For (36), by Cauchy-Schwartz inequality and the fact that $\widehat{\mathbf{v}}$ is $\gamma_{\mathbf{x}}$ -Lipschitz continuous w.r.t. \mathbf{x} , we get

$$\begin{aligned} & \int_{\mathbb{R}^d} 2 \left\langle \widehat{\mathbf{v}}(\widetilde{X}_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_t(\mathbf{x}), t), \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x} \\ & \leq 2\gamma_{\mathbf{x}} \int_{\mathbb{R}^d} \left\| \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\|^2 \pi_0(\mathbf{x}) d\mathbf{x}. \end{aligned} \quad (39)$$

For (37), note that $\widehat{X}_t(\mathbf{x}) = \widehat{X}_{t_k}(\mathbf{x}) + (t - t_k) \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t_k)$, we use the inequality $2\langle a, b \rangle \leq \|a\|^2 + \|b\|^2$ and the fact that $\widehat{\mathbf{v}}$ is $\gamma_{\mathbf{x}}$ -Lipschitz continuous w.r.t. \mathbf{x} to get

$$\begin{aligned} & \int_{\mathbb{R}^d} 2 \left\langle \widehat{\mathbf{v}}(\widehat{X}_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t), \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x} \\ & \leq \int_{\mathbb{R}^d} \left\| \widehat{\mathbf{v}}(\widehat{X}_t(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t) \right\|^2 \pi_0(\mathbf{x}) d\mathbf{x} + \int_{\mathbb{R}^d} \left\| \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\|^2 \pi_0(\mathbf{x}) d\mathbf{x} \\ & \leq \gamma_{\mathbf{x}}^2 (t - t_k)^2 \|\widehat{\mathbf{v}}\|_{L^\infty}^2 + L_t \\ & \leq \gamma_{\mathbf{x}}^2 (t - t_k)^2 B^2 + L_t, \end{aligned} \quad (40)$$

where B is the parameter of the neural networks in (8). For (38), the fact that $\widehat{\mathbf{v}}$ is γ_t -Lipschitz continuous w.r.t. t implies

$$\begin{aligned} & \int_{\mathbb{R}^d} 2 \left\langle \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t) - \widehat{\mathbf{v}}(\widehat{X}_{t_k}(\mathbf{x}), t_k), \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\rangle \pi_0(\mathbf{x}) d\mathbf{x} \\ & \leq \int_{\mathbb{R}^d} \left\| \widetilde{X}_t(\mathbf{x}) - \widehat{X}_t(\mathbf{x}) \right\|^2 \pi_0(\mathbf{x}) d\mathbf{x} + \gamma_t^2 (t - t_k)^2. \end{aligned} \quad (41)$$

Combining (39), (40) and (41), we obtain

$$\frac{dL_t}{dt} \leq (2\gamma_{\mathbf{x}} + 2) L_t + (\gamma_{\mathbf{x}}^2 B^2 + \gamma_t^2) (t - t_k)^2, \quad \text{on } [t_k, t_{k+1}].$$

Again, by Lemma 37, we obtain

$$e^{-(2\gamma_{\mathbf{x}}+2)t_{k+1}} L_{t_{k+1}} - e^{-(2\gamma_{\mathbf{x}}+2)t_k} L_{t_k} \leq \frac{1}{3} (\gamma_{\mathbf{x}}^2 B^2 + \gamma_t^2) (t_{k+1} - t_k)^3.$$

Summing over k and noting that $t_N = T$, we get

$$L_T \leq \frac{1}{3} e^{2(\gamma_{\mathbf{x}}+1)T} (\gamma_{\mathbf{x}}^2 B^2 + \gamma_t^2) \sum_{k=0}^{N-1} (t_{k+1} - t_k)^3.$$

Thus, we have

$$W_2(\widetilde{\pi}_T, \widehat{\pi}_T) = \mathcal{O} \left(e^{\gamma_{\mathbf{x}}(\gamma_{\mathbf{x}}B + \gamma_t)} \sqrt{\sum_{k=0}^{N-1} (t_{k+1} - t_k)^3} \right).$$

■

Lemma 36 *Suppose Assumption 3 holds, we have*

$$W_2(\pi_T, \pi_1) = \mathcal{O}(1 - T).$$

Proof We consider the error from early stopping. Note that X_T and X_1 form a coupling of π_T and π_1 , by the definition of Wasserstein-2 distance, we obtain

$$\begin{aligned} W_2(\pi_T, \pi_1) &\leq \mathbb{E}[\|X_T - X_1\|^2]^{1/2} \\ &= \mathbb{E}[\|(1 - T^2)^{1/2}X_0 - (1 - T)X_1\|^2]^{1/2} \\ &\leq (2(1 - T^2)\mathbb{E}[\|X_0\|^2] + 2(1 - T)^2\mathbb{E}[\|X_1\|^2])^{1/2}. \end{aligned}$$

Since we assume π_1 is supported on $[0, 1]^d$ and $\mathbb{E}[\|X_0\|^2] = d$, we have $W_2(\pi_T, \pi_1) = \mathcal{O}(1 - T)$.

■

Proof [Proof of Theorem 15] Combining Proposition 34, Lemma 35, Lemma 36 and triangle inequality, we obtain

$$\mathbb{E}_{\mathcal{X}}[W_2(\hat{\pi}_T, \pi_1)] = \tilde{\mathcal{O}} \left((1 - T) + e^{\gamma_{\mathbf{x}}}(\gamma_{\mathbf{x}}B + \gamma_t) \sqrt{\sum_{k=0}^{N-1} (t_{k+1} - t_k)^3} + e^{\gamma_{\mathbf{x}}}(1 - T)^{-\frac{3d+5}{2}} n^{-\frac{1}{d+3}} \right).$$

By the choice of neural network in Theorem 14, we have $\gamma_{\mathbf{x}} \leq \frac{c_{14}}{(1-T)^3}$, $\gamma_t \leq \frac{c_{15}\sqrt{\log n}}{(1-T)^3}$. Letting $\max_{k=0,1,\dots,N-1} |t_{k+1} - t_k| = \mathcal{O}(n^{-\frac{1}{d+3}})$, $T(n) = 1 - (\log n)^{-1/6}$ and omitting polynomials of logarithm, we obtain

$$\mathbb{E}_{\mathcal{X}}[W_2(\hat{\pi}_T, \pi_1)] = \tilde{\mathcal{O}} \left((\log n)^{-1/6} + e^{c_{14}\sqrt{\log n}} n^{-\frac{1}{d+3}} \right),$$

which tends to 0 as n goes to infinity.

■

C.3 Auxiliary lemma

Lemma 37 (Grönwall's inequality) *Given a function $f(t)$ defined on $[a, b]$ ($a < b$), satisfying $\frac{df(t)}{dt} \leq \alpha f(t) + g(t)$ on $[a, b]$ and $\alpha \geq 0$, we have*

$$f(b) \leq e^{\alpha(b-a)} f(a) + \int_a^b e^{\alpha(b-t)} g(t) dt.$$

Proof By multiplying $e^{-\alpha t}$ on both sides of $\frac{df(t)}{dt} \leq \alpha f(t) + g(t)$ and some manipulation of algebra, we obtain

$$e^{-\alpha t} \frac{df(t)}{dt} - \alpha e^{-\alpha t} f(t) \leq e^{-\alpha t} g(t).$$

Integrating on interval $[a, b]$ on both sides, we get

$$e^{-\alpha b} f(b) - e^{-\alpha a} f(a) \leq \int_a^b e^{\alpha(b-t)} g(t) dt.$$

This concludes the proof. ■

Appendix D. Compressibility Analysis

Definition 38 (Rademacher complexity) *The Rademacher complexity of a set $A \subseteq \mathbb{R}^N$ is defined as*

$$\mathfrak{R}_N(A) = \mathbb{E}_{\{\sigma_i\}_{k=1}^N} \left[\sup_{a \in A} \frac{1}{N} \sum_{k=1}^N \sigma_k a_k \right],$$

where $\{\sigma_k\}_{k=1}^N$ are N i.i.d Rademacher variables with $\mathbb{P}(\sigma_k = 1) = \mathbb{P}(\sigma_k = -1) = \frac{1}{2}$. The Rademacher complexity of function class \mathcal{F} associate with random sample $\{X_k\}_{k=1}^N$ is defined as

$$\mathfrak{R}_N(\mathcal{F}) = \mathbb{E}_{\{X_k, \sigma_k\}_{k=1}^N} \left[\sup_{u \in \mathcal{F}} \frac{1}{N} \sum_{k=1}^N \sigma_k u(X_k) \right].$$

Proof [Proof of Lemma 16]

• **Step 1: error decomposition.**

For each $\mathbf{D}_\theta \in \mathcal{D}$ and $\mathbf{E}_\theta \in \mathcal{E}$, we have

$$\begin{aligned} & \mathcal{R}(\widehat{\mathbf{D}}, \widehat{\mathbf{E}}) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*) \\ &= \mathcal{R}(\widehat{\mathbf{D}}, \widehat{\mathbf{E}}) - \widehat{\mathcal{R}}(\widehat{\mathbf{D}}, \widehat{\mathbf{E}}) + \widehat{\mathcal{R}}(\widehat{\mathbf{D}}, \widehat{\mathbf{E}}) - \widehat{\mathcal{R}}(\mathbf{D}_\theta, \mathbf{E}_\theta) + \widehat{\mathcal{R}}(\mathbf{D}_\theta, \mathbf{E}_\theta) - \mathcal{R}(\mathbf{D}_\theta, \mathbf{E}_\theta) \\ & \quad + \mathcal{R}(\mathbf{D}_\theta, \mathbf{E}_\theta) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*) \\ &\leq \sup_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \mathcal{R}(\mathbf{D}, \mathbf{E}) - \widehat{\mathcal{R}}(\mathbf{D}, \mathbf{E}) + \sup_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \widehat{\mathcal{R}}(\mathbf{D}, \mathbf{E}) - \mathcal{R}(\mathbf{D}, \mathbf{E}) \\ & \quad + \mathcal{R}(\mathbf{D}_\theta, \mathbf{E}_\theta) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*), \end{aligned}$$

where the inequality is due to the fact that $\widehat{\mathcal{R}}(\widehat{\mathbf{D}}, \widehat{\mathbf{E}}) \leq \widehat{\mathcal{R}}(\mathbf{D}_\theta, \mathbf{E}_\theta)$. Then taking infimum over $\mathbf{D}_\theta \in \mathcal{D}$ and $\mathbf{E}_\theta \in \mathcal{E}$ yields

$$\begin{aligned} & \mathcal{R}(\widehat{\mathbf{D}}, \widehat{\mathbf{E}}) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*) \\ &\leq \sup_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \mathcal{R}(\mathbf{D}, \mathbf{E}) - \widehat{\mathcal{R}}(\mathbf{D}, \mathbf{E}) + \sup_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \widehat{\mathcal{R}}(\mathbf{D}, \mathbf{E}) - \mathcal{R}(\mathbf{D}, \mathbf{E}) \\ & \quad + \inf_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \mathcal{R}(\mathbf{D}, \mathbf{E}) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*). \end{aligned} \tag{42}$$

• **Step 2: approximation error.**

Suppose Assumption 1 and 2 hold. In (12) and (13), we specify the encoder network architecture as

$$\mathcal{E} = \mathcal{T}_{D,d}(N_{\mathbf{E}}, h_{\mathbf{E}}, d_{\mathbf{E},k}, d_{\mathbf{E},v}, d_{\mathbf{E},ff}, B_{\mathbf{E}}, J_{\mathbf{E}}, \gamma_{\mathbf{E}}) \tag{43}$$

and the decoder network architecture as

$$\mathcal{D} = \mathcal{T}_{d,D}(N_{\mathbf{D}}, h_{\mathbf{D}}, d_{\mathbf{D},k}, d_{\mathbf{D},v}, d_{\mathbf{D},ff}, B_{\mathbf{D}}, J_{\mathbf{D}}, \gamma_{\mathbf{D}}). \quad (44)$$

By Theorem 9, given any $0 < \varepsilon < 1$, there exists an encoder network $\mathbf{E} \in \mathcal{E}$ with configuration

$$\begin{aligned} N_{\mathbf{E}} &= \mathcal{O}\left(\log\left(\frac{K_{\mathbf{E}}}{\varepsilon}\right)\right), \quad h_{\mathbf{E}} = \mathcal{O}\left(\left(\frac{K_{\mathbf{E}}}{\varepsilon}\right)^D\right), \quad d_{\mathbf{E},ff} = 8h_{\mathbf{E}}, \quad d_{\mathbf{E},k} = \mathcal{O}(K_{\mathbf{E}}), \\ d_{\mathbf{E},v} &= \mathcal{O}(K_{\mathbf{E}}), \quad B_{\mathbf{E}} = \mathcal{O}(K_{\mathbf{E}}), \quad J_{\mathbf{E}} = \mathcal{O}\left(\left(\frac{K_{\mathbf{E}}}{\varepsilon}\right)^D \log\left(\frac{K_{\mathbf{E}}}{\varepsilon}\right)\right), \quad \gamma_{\mathbf{E}} = \mathcal{O}(K_{\mathbf{E}}), \end{aligned}$$

such that

$$\|\mathbf{E}(\mathbf{y}) - \mathbf{E}^*(\mathbf{y})\|_{L^\infty([0,1]^D)} \leq \varepsilon.$$

Moreover, there exists a decoder network $\mathbf{D} \in \mathcal{D}$ with configuration

$$\begin{aligned} N_{\mathbf{D}} &= \mathcal{O}\left(\log\left(\frac{K_{\mathbf{D}}}{\varepsilon}\right)\right), \quad h_{\mathbf{D}} = \mathcal{O}\left(\left(\frac{K_{\mathbf{D}}}{\varepsilon}\right)^d\right), \quad d_{\mathbf{D},ff} = 8h_{\mathbf{D}}, \quad d_{\mathbf{D},k} = \mathcal{O}(K_{\mathbf{D}}), \\ d_{\mathbf{D},v} &= \mathcal{O}(K_{\mathbf{D}}), \quad B_{\mathbf{D}} = \mathcal{O}(K_{\mathbf{D}}), \quad J_{\mathbf{D}} = \mathcal{O}\left(\left(\frac{K_{\mathbf{D}}}{\varepsilon}\right)^d \log\left(\frac{K_{\mathbf{D}}}{\varepsilon}\right)\right), \quad \gamma_{\mathbf{D}} = \mathcal{O}(K_{\mathbf{D}}), \end{aligned}$$

such that

$$\|\mathbf{D}(\mathbf{y}) - \mathbf{D}^*(\mathbf{y})\|_{L^\infty([0,1]^d)} \leq \varepsilon.$$

Then we have

$$\begin{aligned} &\|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}) - \mathbf{y}\|^2 - \|(\mathbf{D}^* \circ \mathbf{E}^*)(\mathbf{y}) - \mathbf{y}\|^2 \\ &= \langle (\mathbf{D} \circ \mathbf{E})(\mathbf{y}) + (\mathbf{D}^* \circ \mathbf{E}^*)(\mathbf{y}) - 2\mathbf{y}, (\mathbf{D} \circ \mathbf{E})(\mathbf{y}) - (\mathbf{D}^* \circ \mathbf{E}^*)(\mathbf{y}) \rangle \\ &\leq (B_{\mathbf{D}} + K_{\mathbf{D}} + 2\sqrt{D}) \|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}) - (\mathbf{D}^* \circ \mathbf{E}^*)(\mathbf{y})\| \\ &\leq (B_{\mathbf{D}} + K_{\mathbf{D}} + 2\sqrt{D}) (\|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}) - (\mathbf{D}^* \circ \mathbf{E})(\mathbf{y})\| + \|(\mathbf{D}^* \circ \mathbf{E})(\mathbf{y}) - (\mathbf{D}^* \circ \mathbf{E}^*)(\mathbf{y})\|) \\ &\leq (B_{\mathbf{D}} + K_{\mathbf{D}} + 2\sqrt{D}) (\|\mathbf{D}(\mathbf{E}(\mathbf{y})) - \mathbf{D}^*(\mathbf{E}(\mathbf{y}))\| + K_{\mathbf{D}} \|\mathbf{E}(\mathbf{y}) - \mathbf{E}^*(\mathbf{y})\|) \\ &= \mathcal{O}(\varepsilon), \end{aligned}$$

which implies

$$\begin{aligned} &\inf_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \mathcal{R}(\mathbf{D}, \mathbf{E}) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*) \\ &= \inf_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \int_{\mathbb{R}^D} \|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}) - \mathbf{y}\|^2 - \|(\mathbf{D}^* \circ \mathbf{E}^*)(\mathbf{y}) - \mathbf{y}\|^2 d\tilde{\gamma}_1 \\ &= \mathcal{O}(\varepsilon). \end{aligned} \quad (45)$$

• **Step 3: generalization error.**

For simplicity, denote $\mathcal{G} = \{l(\mathbf{y}) = \|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}) - \mathbf{y}\|^2 : \mathbf{E} \in \mathcal{E}, \mathbf{D} \in \mathcal{D}\}$. We introduce a

ghost dataset $\mathcal{Y}' = \{\mathbf{y}'_i\}_{i=1}^m$ drawn i.i.d. from $\tilde{\gamma}_1$, and let $\sigma = \{\sigma_i\}_{i=1}^m$ be a sequence of i.i.d. Rademacher variables independent of both \mathcal{Y} and \mathcal{Y}' . Then we have

$$\begin{aligned}
 & \mathbb{E}_{\mathcal{Y}} \left[\sup_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \mathcal{R}(\mathbf{D}, \mathbf{E}) - \widehat{\mathcal{R}}(\mathbf{D}, \mathbf{E}) \right] \\
 &= \mathbb{E}_{\mathcal{Y}} \left[\sup_{l \in \mathcal{G}} \mathbb{E}[l(\mathbf{y})] - \frac{1}{m} \sum_{i=1}^m l(\mathbf{y}_i) \right] \\
 &= \frac{1}{m} \mathbb{E}_{\mathcal{Y}} \left[\sup_{l \in \mathcal{G}} \mathbb{E}_{\mathcal{Y}'} \left[\sum_{i=1}^m l(\mathbf{y}'_i) \right] - \sum_{i=1}^m l(\mathbf{y}_i) \right] \\
 &\leq \frac{1}{m} \mathbb{E}_{\mathcal{Y}, \mathcal{Y}'} \left[\sup_{l \in \mathcal{G}} \sum_{i=1}^m (l(\mathbf{y}'_i) - l(\mathbf{y}_i)) \right] \\
 &= \frac{1}{m} \mathbb{E}_{\mathcal{Y}, \mathcal{Y}', \sigma} \left[\sup_{l \in \mathcal{G}} \sum_{i=1}^m \sigma_i (l(\mathbf{y}'_i) - l(\mathbf{y}_i)) \right] \\
 &= \frac{1}{m} \mathbb{E}_{\mathcal{Y}', \sigma} \left[\sup_{l \in \mathcal{G}} \sum_{i=1}^m \sigma_i l(\mathbf{y}'_i) \right] + \frac{1}{m} \mathbb{E}_{\mathcal{Y}, \sigma} \left[\sup_{l \in \mathcal{G}} \sum_{i=1}^m (-\sigma_i) l(\mathbf{y}_i) \right] \\
 &= 2 \mathbb{E}_{\mathcal{Y}, \sigma} \left[\sup_{l \in \mathcal{G}} \frac{1}{m} \sum_{i=1}^m \sigma_i l(\mathbf{y}_i) \right] \\
 &= 2 \mathfrak{R}_m(\mathcal{G}),
 \end{aligned} \tag{46}$$

where we use the fact that randomly interchange of the corresponding components of \mathcal{Y} and \mathcal{Y}' doesn't affect the joint distribution of \mathcal{Y} and \mathcal{Y}' , \mathbf{y}_i and \mathbf{y}'_i have the same distribution, and σ_i and $-\sigma_i$ have the same distribution. Similarly, we have

$$\mathbb{E}_{\mathcal{Y}} \left[\sup_{\mathbf{D} \in \mathcal{D}, \mathbf{E} \in \mathcal{E}} \widehat{\mathcal{R}}(\mathbf{D}, \mathbf{E}) - \mathcal{R}(\mathbf{D}, \mathbf{E}) \right] \leq 2 \mathfrak{R}_m(\mathcal{G}). \tag{47}$$

By employing the chaining technique, an upper bound on the Rademacher complexity of a function class can be established via its covering number. What remains is to determine a bound for the covering number. To establish a bound on $\mathcal{N}(\delta, \mathcal{G}, d_{\mathcal{Y}, \infty})$, we first define necessary subsets of the encoder and decoder function spaces. We use the superscript i to denote the i -th component. Let $\mathcal{E}^{(i)} := \{E^{(i)} : \mathbf{E} \in \mathcal{E}\}$ for $i = 1, \dots, d$, and similarly, let $\mathcal{D}^{(i)} := \{D^{(i)} : \mathbf{D} \in \mathcal{D}\}$ for $i = 1, \dots, D$. We then construct a δ -cover of $\mathcal{E}^{(i)}$, denoted as $\mathcal{E}_{\delta}^{(i)}$, where $|\mathcal{E}_{\delta}^{(i)}| = \mathcal{N}(\delta, \mathcal{E}^{(i)}, d_{\mathcal{Y}, \infty})$. This means for every $E^{(i)} \in \mathcal{E}^{(i)}$, there is an $E_{\delta}^{(i)}$ in $\mathcal{E}_{\delta}^{(i)}$ such that the distance $d_{\mathcal{Y}, \infty}(E^{(i)}, E_{\delta}^{(i)}) \leq \delta$. Using the triangle inequality, we can assert the existence of $\tilde{E}_{\delta}^{(i)} \in \mathcal{E}^{(i)}$ for which $d_{\mathcal{Y}, \infty}(E^{(i)}, \tilde{E}_{\delta}^{(i)}) \leq 2\delta$. In a similar manner, we apply the discretization to the decoder part. With a fixed encoder network \mathbf{E} , an δ -cover for $\mathcal{D}^{(i)}$ is established, named $\mathcal{D}_{\delta}^{(i)}$, with $|\mathcal{D}_{\delta}^{(i)}| = \mathcal{N}(\delta, \mathcal{D}^{(i)}, d_{\mathbf{E}(\mathcal{Y}), \infty})$, where $\mathbf{E}(\mathcal{Y})$ denotes the set $\{\mathbf{E}(\mathbf{y}_i)\}_{i=1}^m$. This setup ensures that for any $D^{(i)} \in \mathcal{D}^{(i)}$, there exists a corresponding $D_{\delta}^{(i)} \in \mathcal{D}_{\delta}^{(i)}$ such that $d_{\mathbf{E}(\mathcal{Y}), \infty}(D^{(i)}, D_{\delta}^{(i)}) \leq \delta$. We can also find a $\tilde{D}_{\delta}^{(i)} \in \mathcal{D}^{(i)}$ that satisfies $d_{\mathbf{E}(\mathcal{Y}), \infty}(D^{(i)}, \tilde{D}_{\delta}^{(i)}) \leq 2\delta$.

For any $l \in \mathcal{G}$ with $l(\mathbf{y}) = \|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}) - \mathbf{y}\|^2$, where $\mathbf{E} \in \mathcal{E}$, $\mathbf{D} \in \mathcal{D}$, the discretization above determines a \tilde{l} with $\tilde{l}(\mathbf{y}) = \|(\tilde{\mathbf{D}} \circ \tilde{\mathbf{E}})(\mathbf{y}) - \mathbf{y}\|^2$, where $\tilde{\mathbf{E}} = (\tilde{E}_\delta^{(1)}, \dots, \tilde{E}_\delta^{(d)})^\top$ and $\tilde{\mathbf{D}} = (\tilde{D}_\delta^{(1)}, \dots, \tilde{D}_\delta^{(D)})^\top$. Then

$$\begin{aligned}
 & d_{\mathcal{Y}, \infty}(l, \tilde{l}) \\
 &= \max_{k=1, \dots, m} \left| l(\mathbf{y}_k) - \tilde{l}(\mathbf{y}_k) \right| \\
 &= \max_{k=1, \dots, m} \left| \|(\mathbf{D} \circ \mathbf{E})(\mathbf{y}_k) - \mathbf{y}_k\|^2 - \|(\tilde{\mathbf{D}} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) - \mathbf{y}_k\|^2 \right| \\
 &= \max_{k=1, \dots, m} \left| \left\langle (\mathbf{D} \circ \mathbf{E})(\mathbf{y}_k) + (\tilde{\mathbf{D}} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) - 2\mathbf{y}_k, (\mathbf{D} \circ \mathbf{E})(\mathbf{y}_k) - (\tilde{\mathbf{D}} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) \right\rangle \right| \\
 &\leq \max_{k=1, \dots, m} \left\| (\mathbf{D} \circ \mathbf{E})(\mathbf{y}_k) + (\tilde{\mathbf{D}} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) - 2\mathbf{y}_k \right\| \cdot \left\| (\mathbf{D} \circ \mathbf{E})(\mathbf{y}_k) - (\tilde{\mathbf{D}} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) \right\| \\
 &\leq \left((D+1)B_D + 2\sqrt{D} \right) \max_{k=1, \dots, m} \left\| (\mathbf{D} \circ \mathbf{E})(\mathbf{y}_k) - (\mathbf{D} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) \right\| + \left\| (\mathbf{D} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) - (\tilde{\mathbf{D}} \circ \tilde{\mathbf{E}})(\mathbf{y}_k) \right\| \\
 &\leq \left((D+1)B_D + 2\sqrt{D} \right) \max_{k=1, \dots, m} \gamma_D \left\| \mathbf{E}(\mathbf{y}_k) - \tilde{\mathbf{E}}(\mathbf{y}_k) \right\| + \left\| \mathbf{D}(\tilde{\mathbf{E}}(\mathbf{y}_k)) - \tilde{\mathbf{D}}(\tilde{\mathbf{E}}(\mathbf{y}_k)) \right\| \\
 &\leq \left((D+1)B_D + 2\sqrt{D} \right) \max_{k=1, \dots, m} \gamma_D \left\| \mathbf{E}(\mathbf{y}_k) - \tilde{\mathbf{E}}(\mathbf{y}_k) \right\|_1 + \left\| \mathbf{D}(\tilde{\mathbf{E}}(\mathbf{y}_k)) - \tilde{\mathbf{D}}(\tilde{\mathbf{E}}(\mathbf{y}_k)) \right\|_1 \\
 &\leq \left((D+1)B_D + 2\sqrt{D} \right) \left(\gamma_D \sum_{i=1}^d d_{\mathcal{Y}, \infty} \left(E^{(i)}, \tilde{E}_\delta^{(i)} \right) + \sum_{i=1}^D d_{\tilde{\mathbf{E}}(\mathcal{Y}), \infty} \left(D^{(i)}, \tilde{D}_\delta^{(i)} \right) \right) \\
 &\leq \left((D+1)B_D + 2\sqrt{D} \right) (2d\gamma_D + 2D) \delta,
 \end{aligned}$$

which implies

$$\begin{aligned}
 & \mathcal{N} \left(\left((D+1)B_D + 2\sqrt{D} \right) (2d\gamma_D + 2D) \delta, \mathcal{G}, d_{\mathcal{Y}, \infty} \right) \\
 &\leq \sum_{\tilde{\mathbf{E}}} \prod_{i=1}^D \mathcal{N} \left(\delta, \mathcal{D}^{(i)}, d_{\tilde{\mathbf{E}}(\mathcal{Y}), \infty} \right) \\
 &\leq \sum_{\tilde{\mathbf{E}}} \prod_{i=1}^D \max_{\mathbf{E}} \mathcal{N} \left(\delta, \mathcal{D}^{(i)}, d_{\tilde{\mathbf{E}}(\mathcal{Y}), \infty} \right) \\
 &= \prod_{i=1}^d \mathcal{N} \left(\delta, \mathcal{E}^{(i)}, d_{\mathcal{Y}, \infty} \right) \cdot \prod_{i=1}^D \max_{\mathbf{E}} \mathcal{N} \left(\delta, \mathcal{D}^{(i)}, d_{\tilde{\mathbf{E}}(\mathcal{Y}), \infty} \right).
 \end{aligned}$$

Using that

$$\begin{aligned}
 \mathcal{E}^{(i)} &\subseteq \mathcal{T}_{D,1}(N_{\mathbf{E}}, h_{\mathbf{E}}, d_{\mathbf{E},k}, d_{\mathbf{E},v}, d_{\mathbf{E},ff}, B_{\mathbf{E}}, J_{\mathbf{E}}, \gamma_{\mathbf{E}}), \\
 \mathcal{D}^{(i)} &\subseteq \mathcal{T}_{d,1}(N_{\mathbf{D}}, h_{\mathbf{D}}, d_{\mathbf{D},k}, d_{\mathbf{D},v}, d_{\mathbf{D},ff}, B_{\mathbf{D}}, J_{\mathbf{D}}, \gamma_{\mathbf{D}}),
 \end{aligned}$$

we get

$$\log \mathcal{N} \left(\left((D+1)B_D + 2\sqrt{D} \right) (2d\gamma_D + 2D) \delta, \mathcal{G}, d_{\mathcal{Y}, \infty} \right)$$

$$\begin{aligned}
 &\leq \sum_{i=1}^d \log \mathcal{N} \left(\delta, \mathcal{E}^{(i)}, d_{\mathcal{Y}, \infty} \right) + \sum_{i=1}^D \max_{\tilde{\mathbf{E}}} \log \mathcal{N} \left(\delta, \mathcal{D}^{(i)}, d_{\tilde{\mathbf{E}}(\mathcal{Y}, \infty)} \right) \\
 &\leq \sum_{i=1}^d \log \mathcal{N} \left(\delta, \mathcal{T}_{D,1}(N_{\mathbf{E}}, h_{\mathbf{E}}, d_{\mathbf{E},k}, d_{\mathbf{E},v}, d_{\mathbf{E},ff}, B_{\mathbf{E}}, J_{\mathbf{E}}, \gamma_{\mathbf{E}}), d_{\mathcal{Y}, \infty} \right) \\
 &\quad + \sum_{i=1}^D \max_{\tilde{\mathbf{E}}} \log \mathcal{N} \left(\delta, \mathcal{T}_{d,1}(N_{\mathbf{D}}, h_{\mathbf{D}}, d_{\mathbf{D},k}, d_{\mathbf{D},v}, d_{\mathbf{D},ff}, B_{\mathbf{D}}, J_{\mathbf{D}}, \gamma_{\mathbf{D}}), d_{\tilde{\mathbf{E}}(\mathcal{Y}, \infty)} \right).
 \end{aligned}$$

Lemma 30 yields that

$$\begin{aligned}
 &\log \mathcal{N} \left(\left((D+1)B_{\mathbf{D}} + 2\sqrt{D} \right) (2d\gamma_{\mathbf{D}} + 2D) \delta, \mathcal{G}, d_{\mathcal{Y}, \infty} \right) \\
 &\leq c_{16} \left(N_{\tilde{\mathbf{E}}}^2 J_{\tilde{\mathbf{E}}} \log (\max \{N_{\mathbf{E}}, h_{\mathbf{E}}, d_{\mathbf{E},k}, d_{\mathbf{E},v}, d_{\mathbf{E},ff}\}) \log \frac{B_{\mathbf{E}} m}{\delta} \right. \\
 &\quad \left. + N_{\mathbf{D}}^2 J_{\mathbf{D}} \log (\max \{N_{\mathbf{D}}, h_{\mathbf{D}}, d_{\mathbf{D},k}, d_{\mathbf{D},v}, d_{\mathbf{D},ff}\}) \log \frac{B_{\mathbf{D}} m}{\delta} \right).
 \end{aligned}$$

Given the chosen parameters, we deduce that

$$\log \mathcal{N} (\delta, \mathcal{G}, d_{\mathcal{Y}, \infty}) = \mathcal{O} \left(\frac{1}{\varepsilon^D} \left(\log \frac{1}{\varepsilon} \right)^4 \log \frac{m}{\delta} \right).$$

Applying Lemma 40, we obtain

$$\begin{aligned}
 \mathfrak{R}_m(\mathcal{G}) &\leq 4 \inf_{0 < \delta < B_{\mathbf{D}}^2 + D} \left(\delta + \frac{3}{\sqrt{m}} \int_{\delta}^{B_{\mathbf{D}}^2 + D} \sqrt{\log \mathcal{N}(\gamma, \mathcal{G}, d_{\mathcal{Y}, \infty})} d\gamma \right) \\
 &\leq 4 \inf_{0 < \delta < B_{\mathbf{D}}^2 + D} \left(\delta + \frac{3}{\sqrt{m}} (B_{\mathbf{D}}^2 + D) \sqrt{\log \mathcal{N}(\delta, \mathcal{G}, d_{\mathcal{Y}, \infty})} \right) \\
 &= \mathcal{O} \left(m^{-1/2} \varepsilon^{-D/2} \left(\log \frac{1}{\varepsilon} \right)^2 (\log m)^{1/2} \right).
 \end{aligned} \tag{48}$$

• **Step 4: balancing error terms.**

Combining (45), (46), (47) and (48), we have

$$\mathbb{E}_{\mathcal{Y}} \left[\mathcal{R}(\hat{\mathbf{D}}, \hat{\mathbf{E}}) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*) \right] = \mathcal{O} \left(\varepsilon + m^{-1/2} \varepsilon^{-D/2} \left(\log \frac{1}{\varepsilon} \right)^2 (\log m)^{1/2} \right).$$

Setting $\varepsilon = m^{-\frac{1}{D+2}}$ gives rise to

$$\mathbb{E}_{\mathcal{Y}} \left[\mathcal{R}(\hat{\mathbf{D}}, \hat{\mathbf{E}}) - \mathcal{R}(\mathbf{D}^*, \mathbf{E}^*) \right] = \mathcal{O} \left(m^{-\frac{1}{D+2}} (\log m)^{5/2} \right).$$

$\mathcal{R}(\mathbf{D}^*, \mathbf{E}^*) = \varepsilon_{\tilde{\gamma}_1}$ concludes the proof. ■

Proof [Proof of Theorem 17] Given m samples drawn from the pre-training data distribution $\tilde{\gamma}_1$, we determine $\hat{\mathbf{D}}, \hat{\mathbf{E}}$ through empirical risk minimization as in (11). Given n samples drawn from the target distribution γ_1 , the encoder $\hat{\mathbf{E}}$ maps these samples to a low-dimensional latent space, where flow matching and sampling are completed. The decoder $\hat{\mathbf{E}}$ remaps the sampled data to the high-dimensional space, conforming to distribution $\hat{\gamma}_T$. In our framework, we have

$$\begin{aligned}
 & \mathbb{E}_{\mathcal{X}, \mathcal{Y}}[W_2(\hat{\gamma}_T, \gamma_1)] \\
 &= \mathbb{E}_{\mathcal{Y}}[\mathbb{E}_{\mathcal{X}}[W_2(\hat{\mathbf{D}}_{\#}\hat{\pi}_T, \gamma_1)]] \\
 &\leq \mathbb{E}_{\mathcal{Y}}[\mathbb{E}_{\mathcal{X}}[W_2(\hat{\mathbf{D}}_{\#}\hat{\pi}_T, (\hat{\mathbf{D}} \circ \hat{\mathbf{E}})_{\#}\gamma_1)]] + \mathbb{E}_{\mathcal{Y}}[W_2((\hat{\mathbf{D}} \circ \hat{\mathbf{E}})_{\#}\gamma_1, (\hat{\mathbf{D}} \circ \hat{\mathbf{E}})_{\#}\tilde{\gamma}_1)] \\
 &\quad + \mathbb{E}_{\mathcal{Y}}[W_2((\hat{\mathbf{D}} \circ \hat{\mathbf{E}})_{\#}\tilde{\gamma}_1, \tilde{\gamma}_1)] + W_2(\tilde{\gamma}_1, \gamma_1) \\
 &\leq \mathbb{E}_{\mathcal{Y}}[\text{Lip}(\hat{\mathbf{D}}) \mathbb{E}_{\mathcal{X}}[W_2(\hat{\pi}_T, \pi_1)]] + \mathbb{E}_{\mathcal{Y}}[\text{Lip}(\hat{\mathbf{D}})\text{Lip}(\hat{\mathbf{E}}) W_2(\gamma_1, \tilde{\gamma}_1)] + \mathbb{E}_{\mathcal{Y}}[\mathcal{R}(\hat{\mathbf{D}}, \hat{\mathbf{E}})]^{1/2} + W_2(\tilde{\gamma}_1, \gamma_1) \\
 &\leq \gamma_{\mathbf{D}} \mathbb{E}_{\mathcal{Y}}[\mathbb{E}_{\mathcal{X}}[W_2(\hat{\pi}_T, \pi_1)]] + \mathbb{E}_{\mathcal{Y}}[\mathcal{R}(\hat{\mathbf{D}}, \hat{\mathbf{E}})]^{1/2} + (\gamma_{\mathbf{E}}\gamma_{\mathbf{D}} + 1)\varepsilon_{\tilde{\gamma}_1, \gamma_1} \\
 &= \mathcal{O}(\sqrt{\varepsilon_{\tilde{\gamma}_1}} + \varepsilon_{\tilde{\gamma}_1, \gamma_1}),
 \end{aligned}$$

where the second inequality follows from $\mathbb{E}_{\mathcal{Y}}[W_2((\hat{\mathbf{D}} \circ \hat{\mathbf{E}})_{\#}\tilde{\gamma}_1, \tilde{\gamma}_1)] \leq \mathbb{E}_{\mathcal{Y}}[\mathcal{R}(\hat{\mathbf{D}}, \hat{\mathbf{E}})]^{1/2} \leq \mathbb{E}_{\mathcal{Y}}[\mathcal{R}(\hat{\mathbf{D}}, \hat{\mathbf{E}})]^{1/2}$ and Lemma 39, the third inequality follows from $\hat{\mathbf{D}} \in \mathcal{D}, \hat{\mathbf{E}} \in \mathcal{E}$, and the last equality follows from Lemma 16 and Theorem 15. \blacksquare

D.1 Auxiliary lemma

Lemma 39 *Let μ, ν be distributions on \mathbb{R}^d and let $\mathbf{f} : \mathbb{R}^d \rightarrow \mathbb{R}^{d'}$ be a Lipschitz continuous mapping with Lipschitz constant $\text{Lip}(\mathbf{f}) < \infty$. Then,*

$$W_2(\mathbf{f}_{\#}\mu, \mathbf{f}_{\#}\nu) \leq \text{Lip}(\mathbf{f})W_2(\mu, \nu).$$

Proof Similar proof can be found in (Perekrestenko et al., 2021, Lemma 9). Let π be a coupling between μ and ν and let $\mathbf{g} : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}^{d'} \times \mathbb{R}^{d'}, (\mathbf{y}_1, \mathbf{y}_2) \mapsto (\mathbf{f}(\mathbf{y}_1), \mathbf{f}(\mathbf{y}_2))$. Then $\mathbf{g}_{\#}\pi$ is a coupling between $\mathbf{f}_{\#}\mu$ and $\mathbf{f}_{\#}\nu$ and

$$\begin{aligned}
 W_2(\mathbf{f}_{\#}\mu, \mathbf{f}_{\#}\nu) &\leq \left(\int_{\mathbb{R}^d \times \mathbb{R}^d} \|\mathbf{y}_1 - \mathbf{y}_2\|^2 d(\mathbf{g}_{\#}\pi)(\mathbf{y}_1, \mathbf{y}_2) \right)^{1/2} \\
 &= \left(\int_{\mathbb{R}^d \times \mathbb{R}^d} \|\mathbf{f}(\mathbf{y}_1) - \mathbf{f}(\mathbf{y}_2)\|^2 d\pi(\mathbf{y}_1, \mathbf{y}_2) \right)^{1/2} \\
 &\leq \text{Lip}(\mathbf{f}) \left(\int_{\mathbb{R}^d \times \mathbb{R}^d} \|\mathbf{y}_1 - \mathbf{y}_2\|^2 d\pi(\mathbf{y}_1, \mathbf{y}_2) \right)^{1/2}.
 \end{aligned}$$

Taking the infimum over all $\pi \in \Pi(\mu, \nu)$, we get

$$W_2(\mathbf{f}_{\#}\mu, \mathbf{f}_{\#}\nu) \leq \text{Lip}(\mathbf{f})W_2(\mu, \nu). \quad \blacksquare$$

Lemma 40 *Let \mathcal{F} be a function class defined on Ω and $\mathcal{D} = \{\mathbf{x}_1, \dots, \mathbf{x}_n\}$. If $\sup_{f \in \mathcal{F}} \|f\|_{L^\infty(\Omega)} \leq B$, then*

$$\mathfrak{R}_n(\mathcal{F}) \leq 4 \inf_{0 < \delta < B/2} \left(\delta + \frac{3}{\sqrt{n}} \int_\delta^{B/2} \sqrt{\log \mathcal{N}(\varepsilon, \mathcal{F}, d_{\mathcal{D}, \infty})} d\varepsilon \right).$$

Proof See the proof of Shalev-Shwartz and Ben-David (2014, Lemma 27.4) and Duan et al. (2022, Lemma 3.11). \blacksquare

Appendix E. Properties of true velocity field

E.1 Computation of true velocity field

Lemma 41 *The true velocity field \mathbf{v}^* can be written as:*

$$\mathbf{v}^*(\mathbf{x}, t) = \frac{1}{t} \nabla_{\mathbf{x}} \log \pi_t(\mathbf{x}) + \frac{1}{t} \mathbf{x}, \quad (49)$$

where π_t is the density of X_t , and $X_t = \sqrt{1-t^2}X_0 + tX_1$.

Proof By some manipulation of algebra, (6) implies

$$\begin{aligned} \mathbf{v}^*(\mathbf{x}, t) &= \mathbb{E} \left[X_1 - \frac{t}{\sqrt{1-t^2}} X_0 \middle| X_t = \mathbf{x} \right] \\ &= \mathbb{E} \left[X_1 - \frac{t}{1-t^2} \left(\sqrt{1-t^2} X_0 + tX_1 - tX_1 \right) \middle| X_t = \mathbf{x} \right] \\ &= \frac{1}{1-t^2} \mathbb{E}[X_1 | X_t = \mathbf{x}] - \frac{t}{1-t^2} \mathbf{x} \\ &= \frac{1}{1-t^2} \int \frac{\mathbf{x}_1 \pi_{t|1}(\mathbf{x} | \mathbf{x}_1) \pi_1(\mathbf{x}_1)}{\pi_t(\mathbf{x})} d\mathbf{x}_1 - \frac{t}{1-t^2} \mathbf{x} \\ &= \frac{1}{1-t^2} \int \frac{1}{\sqrt{(2\pi)^d (1-t^2)^d}} \frac{\mathbf{x}_1 \exp\left(-\frac{\|\mathbf{x}-t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(\mathbf{x}_1)}{\pi_t(\mathbf{x})} d\mathbf{x}_1 - \frac{t}{1-t^2} \mathbf{x} \\ &= \frac{1}{t} \int \frac{1}{\sqrt{(2\pi)^d (1-t^2)^d}} \frac{\left(\frac{t\mathbf{x}_1-\mathbf{x}}{1-t^2} + \frac{\mathbf{x}}{1-t^2}\right) \exp\left(-\frac{\|\mathbf{x}-t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(\mathbf{x}_1)}{\pi_t(\mathbf{x})} d\mathbf{x}_1 - \frac{t}{1-t^2} \mathbf{x} \\ &= \frac{1}{t} \int \frac{1}{\sqrt{(2\pi)^d (1-t^2)^d}} \frac{\nabla_{\mathbf{x}} \exp\left(-\frac{\|\mathbf{x}-t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(\mathbf{x}_1)}{\pi_t(\mathbf{x})} d\mathbf{x}_1 + \left(\frac{1}{t(1-t^2)} - \frac{t}{1-t^2}\right) \mathbf{x} \\ &= \frac{1}{t} \nabla_{\mathbf{x}} \log \pi_t(\mathbf{x}) + \frac{1}{t} \mathbf{x}, \end{aligned}$$

where $\pi_{t|1}$ is the density of X_t conditioned on X_1 . It concludes the proof. \blacksquare

E.2 Computation of partial derivative regarding t

Lemma 42 $\partial_t \mathbf{v}^*(\mathbf{x}, t) = -\frac{1+t^2}{(1-t^2)^2} \mathbf{x} + \frac{2t}{(1-t^2)^2} \mathbb{E}[X_1 | X_t = \mathbf{x}] + \frac{1+t^2}{(1-t^2)^3} \text{Cov}[X_1 | X_t = \mathbf{x}] \mathbf{x} - \frac{t}{(1-t^2)^3} (\mathbb{E}[X_1 \|X_1\|^2 | X_t = \mathbf{x}] - \mathbb{E}[X_1 | X_t = \mathbf{x}] \mathbb{E}[\|X_1\|^2 | X_t = \mathbf{x}])$, where $\text{Cov}[X_1 | X_t = \mathbf{x}]$ is the covariance matrix of X_1 conditioned on $X_t = \mathbf{x}$.

Proof To ease notation, we define $\phi_t(\mathbf{x}) := \int \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1)$, which is the unnormalized version of $\pi_t(\mathbf{x})$. Note that $\nabla \log \phi_t(\mathbf{x}) = \nabla \log \pi_t(\mathbf{x})$, using the product rule of the derivatives, (49) implies:

$$\begin{aligned} \partial_t \mathbf{v}^*(\mathbf{x}, t) &= -\frac{1}{t^2} \nabla_{\mathbf{x}} \log \pi_t(\mathbf{x}) + \frac{1}{t} \partial_t \nabla_{\mathbf{x}} \log \pi_t(\mathbf{x}) - \frac{1}{t^2} \mathbf{x} \\ &= -\frac{1}{t(1-t^2)} \mathbb{E}[X_1 | X_t = \mathbf{x}] + \frac{1}{t^2(1-t^2)} \mathbf{x} + \frac{1}{t} \partial_t \left(\frac{\nabla \phi_t(\mathbf{x})}{\phi_t(\mathbf{x})} \right) - \frac{1}{t^2} \mathbf{x} \\ &= \frac{1}{1-t^2} \mathbf{x} - \frac{1}{t(1-t^2)} \mathbb{E}[X_1 | X_t = \mathbf{x}] + \frac{1}{t} \left(\frac{\partial_t \nabla \phi_t(\mathbf{x})}{\phi_t(\mathbf{x})} - \frac{\partial_t \phi_t(\mathbf{x}) \nabla \phi_t(\mathbf{x})}{(\phi_t(\mathbf{x}))^2} \right) \end{aligned} \quad (50)$$

Then we focus on the computation of the last term above. We first compute $\frac{\partial_t \nabla \phi_t(\mathbf{x})}{\phi_t(\mathbf{x})}$ as follows:

$$\begin{aligned} &\frac{\partial_t \nabla \phi_t(\mathbf{x})}{\phi_t(\mathbf{x})} \\ &= \frac{1}{\phi_t(\mathbf{x})} \partial_t \int \frac{t\mathbf{x}_1 - \mathbf{x}}{1-t^2} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1) \\ &= \frac{1}{\phi_t(\mathbf{x})} \int \left(\frac{(1-t^2)\mathbf{x}_1 + 2t(t\mathbf{x}_1 - \mathbf{x})}{(1-t^2)^2} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \right. \\ &\quad \left. - \frac{t\mathbf{x}_1 - \mathbf{x}}{1-t^2} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \frac{(t\|\mathbf{x}_1\|^2 - \mathbf{x}_1^\top \mathbf{x})(1-t^2) + t\|\mathbf{x} - t\mathbf{x}_1\|^2}{(1-t^2)^2} \right) \pi_1(d\mathbf{x}_1) \quad (51) \\ &= \frac{1+t^2}{(1-t^2)^2} \mathbb{E}[X_1 | X_t = \mathbf{x}] - \frac{2t}{(1-t^2)^2} \mathbf{x} - \frac{t^2}{(1-t^2)^3} \mathbb{E}[X_1 \|X_1\|^2 | X_t = \mathbf{x}] \\ &\quad + \frac{t(1+t^2)}{(1-t^2)^3} \mathbb{E}[X_1 X_1^\top | X_t = \mathbf{x}] \mathbf{x} - \frac{t^2}{(1-t^2)^3} \mathbb{E}[X_1 | X_t = \mathbf{x}] \|\mathbf{x}\|^2 \\ &\quad + \frac{t}{(1-t^2)^3} \mathbb{E}[\|X_1\|^2 | X_t = \mathbf{x}] \mathbf{x} - \frac{1+t^2}{(1-t^2)^3} \mathbb{E}[X_1^\top \mathbf{x} | X_t = \mathbf{x}] \mathbf{x} + \frac{t}{(1-t^2)^3} \|\mathbf{x}\|^2 \mathbf{x} \end{aligned}$$

By some calculations, we obtain

$$\begin{aligned} \frac{\partial_t \nabla \phi_t(\mathbf{x})}{\phi_t(\mathbf{x})} &= \frac{1}{\phi_t(\mathbf{x})} \int \left(-\frac{t}{(1-t^2)^2} \|\mathbf{x}\|^2 - \frac{t}{(1-t^2)^2} \|\mathbf{x}_1\|^2 + \frac{1+t^2}{(1-t^2)^2} \mathbf{x}_1^\top \mathbf{x} \right) \\ &\quad \cdot \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1) \quad (52) \\ &= -\frac{t}{(1-t^2)^2} \mathbb{E}[\|X_1\|^2 | X_t = \mathbf{x}] + \frac{1+t^2}{(1-t^2)^2} \mathbb{E}[X_1^\top \mathbf{x} | X_t = \mathbf{x}] - \frac{t}{(1-t^2)^2} \|\mathbf{x}\|^2 \end{aligned}$$

and

$$\begin{aligned} \frac{\nabla \phi_t(\mathbf{x})}{\phi_t(\mathbf{x})} &= \frac{1}{\phi_t(\mathbf{x})} \int \frac{t\mathbf{x}_1 - \mathbf{x}}{1-t^2} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1) \\ &= -\frac{\mathbf{x}}{1-t^2} + \frac{t}{1-t^2} \mathbb{E}[X_1|X_t = \mathbf{x}]. \end{aligned} \quad (53)$$

Combining (50), (51), (52) and (53), we obtain

$$\begin{aligned} \partial_t \mathbf{v}^*(\mathbf{x}, t) &= -\frac{1+t^2}{(1-t^2)^2} \mathbf{x} + \frac{2t}{(1-t^2)^2} \mathbb{E}[X_1|X_t = \mathbf{x}] + \frac{1+t^2}{(1-t^2)^3} \text{Cov}[X_1|X_t = \mathbf{x}] \mathbf{x} \\ &\quad - \frac{t}{(1-t^2)^3} (\mathbb{E}[X_1\|X_1\|^2|X_t = \mathbf{x}] - \mathbb{E}[X_1|X_t = \mathbf{x}]\mathbb{E}[\|X_1\|^2|X_t = \mathbf{x}]). \end{aligned}$$

It concludes the proof. \blacksquare

E.3 An upper bound for velocity field

Lemma 43 *Suppose Assumption 3 holds. Then $\sup_{t \in [0, T]} \sup_{\mathbf{x} \in [-R, R]^d} |v_i^*(\mathbf{x}, t)| \leq \frac{1+R}{1-T^2}$.*

Proof For the i -coordinate, we have $v_i^* = \frac{1}{1-t^2} \mathbb{E}[X_1^{(i)}|X_t = \mathbf{x}] - \frac{t}{1-t^2} x_i$, where $X_1^{(i)}$ denotes the i -coordinate of X_1 . Note that π_1 is supported on $[0, 1]^d$ as stated in Assumption 3, then

$$\sup_{t \in [0, T]} \sup_{\mathbf{x} \in [-R, R]^d} |v_i^*(\mathbf{x}, t)| \leq \frac{1+R}{1-T^2}. \quad \blacksquare$$

E.4 An upper bound of partial derivative regarding t

Lemma 44 *Suppose Assumption 3 holds. Then $\sup_{t \in [0, T]} \sup_{\mathbf{x} \in [-R, R]^d} \|\partial_t \mathbf{v}^*(\mathbf{x}, t)\| = \mathcal{O}\left(\frac{R}{(1-T)^3}\right)$.*

Proof From Lemma 42, we have

$$\begin{aligned} \|\partial_t \mathbf{v}^*(\mathbf{x}, t)\| &\leq \frac{1+t^2}{(1-t^2)^2} \|\mathbf{x}\| + \frac{2t}{(1-t^2)^2} \|\mathbb{E}[X_1|X_t = \mathbf{x}]\| + \frac{1+t^2}{(1-t^2)^3} \|\text{Cov}[X_1|X_t = \mathbf{x}]\|_{\text{op}} \|\mathbf{x}\| \\ &\quad + \frac{t}{(1-t^2)^3} (\|\mathbb{E}[X_1\|X_1\|^2|X_t = \mathbf{x}]\| + \|\mathbb{E}[X_1|X_t = \mathbf{x}]\| \|\mathbb{E}[\|X_1\|^2|X_t = \mathbf{x}]\|). \end{aligned}$$

Note that π_1 is assumed to be supported on $[0, 1]^d$, we have $\|\mathbb{E}[X_1|X_t = \mathbf{x}]\| \leq \mathbb{E}[\|X_1\|^2|X_t = \mathbf{x}]^{1/2} \leq d^{1/2}$ and $\|\mathbb{E}[X_1\|X_1\|^2|X_t = \mathbf{x}]\| \leq \mathbb{E}[\|X_1\|^6|X_t = \mathbf{x}]^{1/2} \leq d^{3/2}$. To bound $\|\text{Cov}[X_1|X_t = \mathbf{x}]\|_{\text{op}}$, we have the following inequality for any $\mathbf{u} \in \mathbb{R}^d$,

$$\begin{aligned} \mathbf{u}^\top \text{Cov}[X_1|X_t = \mathbf{x}] \mathbf{u} &= \mathbb{E}[\mathbf{u}^\top X_1 X_1^\top \mathbf{u} | X_t = \mathbf{x}] - \mathbb{E}[\mathbf{u}^\top X_1 | X_t = \mathbf{x}] \mathbb{E}[X_1^\top \mathbf{u} | X_t = \mathbf{x}] \\ &= \mathbb{E}[(\mathbf{u}^\top X_1)^2 | X_t = \mathbf{x}] - \mathbb{E}[\mathbf{u}^\top X_1 | X_t = \mathbf{x}]^2 \\ &\leq 2d \|\mathbf{u}\|^2 \end{aligned}$$

Hence we have $\|\text{Cov}[X_1|X_t = \mathbf{x}]\|_{\text{op}} \leq 2d$. Using these above inequalities, we have

$$\sup_{t \in [0, T]} \sup_{\mathbf{x} \in [-R, R]^d} \|\partial_t \mathbf{v}^*(\mathbf{x}, t)\| \leq \frac{\sqrt{d}(1+T^2)R}{(1-T^2)^2} + \frac{2\sqrt{d}T}{(1-T^2)^2} + \frac{2d^{3/2}(1+T^2)R}{(1-T^2)^3} + \frac{2d^{3/2}T}{(1-T^2)^3}.$$

Since $0 < T < 1$, the above inequality implies $\sup_{t \in [0, T]} \sup_{\mathbf{x} \in [-R, R]^d} \|\partial_t \mathbf{v}^*(\mathbf{x}, t)\| = \mathcal{O}\left(\frac{R}{(1-T)^3}\right)$.
 ■

E.5 Computation of partial derivative regarding spatial variable \mathbf{x}

Lemma 45 *We have the following identity:*

$$\nabla \mathbf{v}^*(\mathbf{x}, t) = \frac{t}{(1-t^2)^2} \text{Cov}[X_1|X_t = \mathbf{x}] - \frac{t}{1-t^2} I_d.$$

Proof By Lemma 41, we have

$$\nabla \mathbf{v}^*(\mathbf{x}, t) = \frac{1}{t} \nabla^2 \log \pi_t(\mathbf{x}) + \frac{1}{t} I_d.$$

Further, the Hessian $\nabla^2 \log \pi_t(\mathbf{x})$ can be computed as

$$\begin{aligned} \nabla^2 \log \pi_t(\mathbf{x}) &= \nabla \left(\frac{\int_{\mathbb{R}^d} \frac{t\mathbf{x}_1 - \mathbf{x}}{1-t^2} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1)}{\int_{\mathbb{R}^d} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1)} \right) \\ &= -\frac{1}{1-t^2} I_d + \frac{\int_{\mathbb{R}^d} \left(\frac{t\mathbf{x}_1 - \mathbf{x}}{1-t^2}\right)^{\otimes 2} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1)}{\int_{\mathbb{R}^d} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1)} \\ &\quad - \left(\frac{\int_{\mathbb{R}^d} \frac{t\mathbf{x}_1 - \mathbf{x}}{1-t^2} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1)}{\int_{\mathbb{R}^d} \exp\left(-\frac{\|\mathbf{x} - t\mathbf{x}_1\|^2}{2(1-t^2)}\right) \pi_1(d\mathbf{x}_1)} \right)^{\otimes 2} \\ &= -\frac{1}{1-t^2} I_d + \frac{t^2}{(1-t^2)^2} \text{Cov}[X_1|X_t = \mathbf{x}]. \end{aligned}$$

Combing the above identities, we get the desired result. ■

Lemma 46 *Suppose Assumption 3 holds. Then $\sup_{t \in [0, T]} \sup_{\mathbf{x} \in [-R, R]^d} \|\nabla \mathbf{v}^*(\mathbf{x}, t)\|_{\text{op}} \leq \frac{Td}{(1-T^2)^2}$.*

Proof Since we assume the target distribution π_1 is supported on $[0, 1]^d$, we have the following evaluation of the covariance matrix

$$0 \preceq \text{Cov}[X_1|X_t = \mathbf{x}] \preceq dI_d.$$

Thus, we have

$$-\frac{t}{1-t^2}I_d \preceq \nabla \mathbf{v}^*(\mathbf{x}, t) \preceq \left(\frac{td}{(1-t^2)^2} - \frac{t}{1-t^2} \right) I_d.$$

The above inequality implies the upper bound. ■

References

- Michael Samuel Albergo and Eric Vanden-Eijnden. Building normalizing flows with stochastic interpolants. In *International Conference on Learning Representations*, 2022.
- Martin Anthony, Peter L Bartlett, Peter L Bartlett, et al. *Neural network learning: Theoretical foundations*, volume 9. cambridge university press Cambridge, 1999.
- Martin Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein generative adversarial networks. In *International Conference on Machine Learning*, 2017.
- Thomas Bagby, Len Bos, and Norman Levenberg. Multivariate simultaneous approximation. *Constructive approximation*, 18(4):569–577, 2002.
- Yu Bai, Tengyu Ma, and Andrej Risteski. Approximability of discriminators implies diversity in gans. *arXiv preprint arXiv:1806.10586*, 2018.
- Dana H Ballard. Modular learning in neural networks. In *Proceedings of the sixth National Conference on artificial intelligence-volume 1*, pages 279–284, 1987.
- Peter L Bartlett, Nick Harvey, Christopher Liaw, and Abbas Mehrabian. Nearly-tight vc-dimension and pseudodimension bounds for piecewise linear neural networks. *The Journal of Machine Learning Research*, 20(1):2285–2301, 2019.
- Joe Benton, Valentin De Bortoli, Arnaud Doucet, and George Deligiannidis. Linear convergence bounds for diffusion models via stochastic localization. *arXiv preprint arXiv:2308.03686*, 2023.
- Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023a.
- Andreas Blattmann, Robin Rombach, Huan Ling, Tim Dockhorn, Seung Wook Kim, Sanja Fidler, and Karsten Kreis. Align your latents: High-resolution video synthesis with latent diffusion models. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2023b.
- Hervé Boursard and Yves Kamp. Auto-association by multilayer perceptrons and singular value decomposition. *Biological cybernetics*, 59(4-5):291–294, 1988.

- Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, Clarence Ng, Ricky Wang, and Aditya Ramesh. Video generation models as world simulators. 2024. URL <https://openai.com/research/video-generation-models-as-world-simulators>.
- Caroline Chan, Shiry Ginosar, Tinghui Zhou, and Alexei A Efros. Everybody dance now. In *IEEE International Conference on Computer Vision*, 2019.
- Jinyuan Chang, Zhao Ding, Yuling Jiao, Ruoxuan Li, and Jerry Zhijian Yang. Deep conditional generative learning: Model and error analysis. *arXiv preprint arXiv:2402.01460*, 2024.
- Haoxin Chen, Yong Zhang, Xiaodong Cun, Menghan Xia, Xintao Wang, Chao Weng, and Ying Shan. Videocrafter2: Overcoming data limitations for high-quality video diffusion models. *arXiv preprint arXiv:2401.09047*, 2024.
- Hongrui Chen, Holden Lee, and Jianfeng Lu. Improved analysis of score-based generative modeling: User-friendly bounds under minimal smoothness assumptions. In *International Conference on Machine Learning*, 2023a.
- Minshuo Chen, Wenjing Liao, Hongyuan Zha, and Tuo Zhao. Distribution approximation and statistical estimation guarantees of generative adversarial networks. *arXiv preprint arXiv:2002.03938*, 2020a.
- Minshuo Chen, Wenjing Liao, Hongyuan Zha, and Tuo Zhao. Statistical guarantees of generative adversarial networks for distribution estimation. *arXiv preprint arXiv:2002.03938*, 2020b.
- Minshuo Chen, Kaixuan Huang, Tuo Zhao, and Mengdi Wang. Score approximation, estimation and distribution recovery of diffusion models on low-dimensional data. In *International Conference on Machine Learning*, 2023b.
- Nanxin Chen, Yu Zhang, Heiga Zen, Ron J Weiss, Mohammad Norouzi, and William Chan. Wavegrad: Estimating gradients for waveform generation. In *International Conference on Learning Representations*, 2020c.
- Sitan Chen, Sinho Chewi, Jerry Li, Yuanzhi Li, Adil Salim, and Anru R Zhang. Sampling is as easy as learning the score: theory for diffusion models with minimal data assumptions. *arXiv preprint arXiv:2209.11215*, 2022.
- Giovanni Conforti, Alain Durmus, and Marta Gentiloni Silveri. Score diffusion models without early stopping: finite fisher information is all you need. *arXiv preprint arXiv:2308.12240*, 2023.
- Quan Dao, Hao Phung, Binh Nguyen, and Anh Tran. Flow matching in latent space. *arXiv preprint arXiv:2307.08698*, 2023.
- Valentin De Bortoli. Convergence of denoising diffusion models under the manifold hypothesis. *arXiv preprint arXiv:2208.05314*, 2022.

- Valentin De Bortoli, James Thornton, Jeremy Heng, and Arnaud Doucet. Diffusion schrödinger bridge with applications to score-based generative modeling. *Advances in Neural Information Processing Systems*, 2021.
- Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. *Advances in Neural Information Processing Systems*, 2021.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. In *International Conference on Learning Representations*, 2020.
- Chenguang Duan, Yuling Jiao, Yanming Lai, Dingwei Li, Jerry Zhijian Yang, et al. Convergence rate analysis for deep ritz method. *Communications in Computational Physics*, 31(4):1020–1048, 2022.
- Maayan Frid-Adar, Eyal Klang, Michal Amitai, Jacob Goldberger, and Hayit Greenspan. Synthetic data augmentation using gan for improved liver lesion classification. In *2018 IEEE 15th international symposium on biomedical imaging (ISBI 2018)*, pages 289–293. IEEE, 2018.
- Yuan Gao, Jian Huang, and Yuling Jiao. Gaussian interpolation flows. *arXiv preprint arXiv:2311.11475*, 2023.
- Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. *Advances in Neural Information Processing Systems*, 2014.
- Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C Courville. Improved training of wasserstein gans. *Advances in Neural Information Processing Systems*, 2017.
- Iryna Gurevych, Michael Kohler, and Gözde Gül Şahin. On the rate of convergence of a classifier based on a transformer encoder. *IEEE Transactions on Information Theory*, 68(12):8139–8155, 2022.
- Yiding Hao, Dana Angluin, and Robert Frank. Formal language recognition by hard attention transformers: Perspectives from circuit complexity. *Transactions of the Association for Computational Linguistics*, 10:800–810, 2022.
- Geoffrey E Hinton and Richard Zemel. Autoencoders, minimum description length and helmholtz free energy. *Advances in Neural Information Processing Systems*, 1993.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in Neural Information Processing Systems*, 2020.
- Lars Hörmander. *The analysis of linear partial differential operators I: Distribution theory and Fourier analysis*. Springer, 2015.

- Jian Huang, Yuling Jiao, Zhen Li, Shiao Liu, Yang Wang, and Yunfei Yang. An error analysis of generative adversarial networks for learning distributions. *The Journal of Machine Learning Research*, 23(1):5047–5089, 2022.
- Sergey Ioffe and Christian Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *International Conference on Machine Learning*, 2015.
- Yuling Jiao, Guohao Shen, Yuanyuan Lin, and Jian Huang. Deep nonparametric regression on approximate manifolds: Nonasymptotic error bounds with polynomial prefactors. *The Annals of Statistics*, 51(2):691–716, 2023.
- Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2019.
- Michael Kohler and Adam Krzyzak. On the rate of convergence of an over-parametrized transformer classifier learned by gradient descent. *arXiv preprint arXiv:2312.17007*, 2023.
- Zhifeng Kong, Wei Ping, Jiaji Huang, Kexin Zhao, and Bryan Catanzaro. Diffwave: A versatile diffusion model for audio synthesis. In *International Conference on Learning Representations*, 2020.
- Mark A Kramer. Nonlinear principal component analysis using autoassociative neural networks. *AIChE journal*, 37(2):233–243, 1991.
- Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. Deep learning. *nature*, 521(7553):436–444, 2015.
- Holden Lee, Jianfeng Lu, and Yixin Tan. Convergence for score-based generative modeling with polynomial complexity. *Advances in Neural Information Processing Systems*, 2022.
- Holden Lee, Jianfeng Lu, and Yixin Tan. Convergence of score-based generative modeling for general data distributions. In *International Conference on Algorithmic Learning Theory*, pages 946–985. PMLR, 2023.
- Hao Liu, Biraj Dahal, Rongjie Lai, and Wenjing Liao. Generalization error guaranteed auto-encoder-based nonlinear model reduction for operator learning. *arXiv preprint arXiv:2401.10490*, 2024a.
- Hao Liu, Alex Havrilla, Rongjie Lai, and Wenjing Liao. Deep nonparametric estimation of intrinsic data structures by chart autoencoders: Generalization error and robustness. *Applied and Computational Harmonic Analysis*, 68:101602, 2024b.
- Jinglin Liu, Chengxi Li, Yi Ren, Feiyang Chen, and Zhou Zhao. Diffsinger: Singing voice synthesis via shallow diffusion mechanism. In *AAAI Conference on Artificial Intelligence*, 2022a.
- Xingchao Liu, Chengyue Gong, et al. Flow straight and fast: Learning to generate and transfer data with rectified flow. In *International Conference on Learning Representations*, 2022b.

- Xingchao Liu, Lemeng Wu, Shujian Zhang, Chengyue Gong, Wei Ping, and Qiang Liu. Flowgrad: Controlling the output of generative odes with gradients. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2023.
- Jianfeng Lu, Zuowei Shen, Haizhao Yang, and Shijun Zhang. Deep network approximation for smooth functions. *SIAM Journal on Mathematical Analysis*, 53(5):5465–5506, 2021.
- Chenlin Meng, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon. Sdedit: Image synthesis and editing with stochastic differential equations. *arXiv preprint arXiv:2108.01073*, 2021.
- Takeru Miyato, Toshiki Kataoka, Masanori Koyama, and Yuichi Yoshida. Spectral normalization for generative adversarial networks. *arXiv preprint arXiv:1802.05957*, 2018.
- Kazusato Oko, Shunta Akiyama, and Taiji Suzuki. Diffusion models are minimax optimal distribution estimators. In *ICLR 2023 Workshop on Mathematical and Empirical Understanding of Foundation Models*, 2023.
- William Peebles and Saining Xie. Scalable diffusion models with transformers. In *IEEE International Conference on Computer Vision*, 2023.
- Dmytro Perekrestenko, Léandre Eberhard, and Helmut Bölcskei. High-dimensional distribution generation through deep neural networks. *Partial Differential Equations and Applications*, 2(5):64, 2021.
- Jorge Pérez, Pablo Barceló, and Javier Marinkovic. Attention is turing complete. *The Journal of Machine Learning Research*, 22(1):3463–3497, 2021.
- Vadim Popov, Ivan Vovk, Vladimir Gogoryan, Tasnima Sadekova, and Mikhail Kudinov. Grad-tts: A diffusion probabilistic model for text-to-speech. In *International Conference on Machine Learning*, 2021.
- Alec Radford, Luke Metz, and Soumith Chintala. Unsupervised representation learning with deep convolutional generative adversarial networks. *arXiv preprint arXiv:1511.06434*, 2015.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2022.
- Johannes Schmidt-Hieber. Nonparametric regression using deep neural networks with ReLU activation function. *The Annals of Statistics*, 48(4):1875 – 1897, 2020.
- Stefan Schonsheck, Jie Chen, and Rongjie Lai. Chart auto-encoders for manifold structured data. *arXiv preprint arXiv:1912.10094*, 2019.
- Shai Shalev-Shwartz and Shai Ben-David. *Understanding machine learning: From theory to algorithms*. Cambridge university press, 2014.

- Zuwei Shen, Haizhao Yang, and Shijun Zhang. Optimal approximation rate of relu networks in terms of width and depth. *Journal de Mathématiques Pures et Appliquées*, 157:101–135, 2022.
- Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. In *International Conference on Learning Representations*, 2021.
- Elias M Stein. *Singular integrals and differentiability properties of functions*. Princeton university press, 1970.
- Taiji Suzuki. Adaptivity of deep reLU network for learning in besov and mixed smooth besov spaces: optimal rate and curse of dimensionality. In *International Conference on Learning Representations*, 2019.
- Rong Tang and Yun Yang. Adaptivity of diffusion models to manifold structures. In *International Conference on Artificial Intelligence and Statistics*, 2024.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in Neural Information Processing Systems*, 2017.
- Gefei Wang, Yuling Jiao, Qian Xu, Yang Wang, and Can Yang. Deep generative learning via schrödinger bridge. In *International Conference on Machine Learning*, 2021.
- Ting-Chun Wang, Ming-Yu Liu, Jun-Yan Zhu, Andrew Tao, Jan Kautz, and Bryan Catanzaro. High-resolution image synthesis and semantic manipulation with conditional gans. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2018.
- Xiang Wang, Hangjie Yuan, Shiwei Zhang, Dayou Chen, Jiuniu Wang, Yingya Zhang, Yujun Shen, Deli Zhao, and Jingren Zhou. Videocomposer: Compositional video synthesis with motion controllability. *Advances in Neural Information Processing Systems*, 2024.
- Jay Zhangjie Wu, Yixiao Ge, Xintao Wang, Stan Weixian Lei, Yuchao Gu, Yufei Shi, Wynne Hsu, Ying Shan, Xiaohu Qie, and Mike Zheng Shou. Tune-a-video: One-shot tuning of image diffusion models for text-to-video generation. In *IEEE International Conference on Computer Vision*, 2023.
- Yilun Xu, Ziming Liu, Max Tegmark, and Tommi Jaakkola. Poisson flow generative models. *Advances in Neural Information Processing Systems*, 2022.
- Dmitry Yarotsky. Error bounds for approximations with deep relu networks. *Neural Networks*, 94:103–114, 2017.
- Dmitry Yarotsky and Anton Zhevnerchuk. The phase diagram of approximation rates for deep neural networks. *Advances in Neural Information Processing Systems*, 2020.
- Chulhee Yun, Srinadh Bhojanapalli, Ankit Singh Rawat, Sashank J Reddi, and Sanjiv Kumar. Are transformers universal approximators of sequence-to-sequence functions? *arXiv preprint arXiv:1912.10077*, 2019.

Jun-Yan Zhu, Taesung Park, Phillip Isola, and Alexei A Efros. Unpaired image-to-image translation using cycle-consistent adversarial networks. In *IEEE International Conference on Computer Vision*, 2017.