

# ON ANNOTATION-FREE OPTIMIZATION OF VIDEO CODING FOR MACHINES

Marc Windsheimer, Fabian Brand, André Kaup

Multimedia Communications and Signal Processing  
Friedrich-Alexander-Universität Erlangen-Nürnberg  
Cauerstr. 7, 91058 Erlangen, Germany

## ABSTRACT

Today, image and video data is not only viewed by humans, but also automatically analyzed by computer vision algorithms. However, current coding standards are optimized for human perception. Emerging from this, research on video coding for machines tries to develop coding methods designed for machines as information sink. Since many of these algorithms are based on neural networks, most proposals for video coding for machines build upon neural compression. So far, optimizing the compression by applying the task loss of the analysis network, for which ground truth data is needed, is achieving the best coding performance. But ground truth data is difficult to obtain and thus an optimization without ground truth is preferred. In this paper, we present an annotation-free optimization strategy for video coding for machines. We measure the distortion by calculating the task loss of the analysis network. Therefore, the predictions on the compressed image are compared with the predictions on the original image, instead of the ground truth data. Our results show that this strategy can even outperform training with ground truth data with rate savings of up to 7.5 %. By using the non-annotated training data, the rate gains can be further increased up to 8.2 %.

**Index Terms**— Video Coding for Machines, Neural Network Compression, Computer Vision, Learned Image Coding, Machine-to-Machine Communication

## 1. INTRODUCTION

Machine-to-machine communication is one of the main causes for the growing amount of data transmitted over the internet. By far the most significant contributions to global data traffic are related to image and video data [1]. The automated analysis of transmitted image and video data is one application of M2M communication. However, image codecs, like JPEG or BPG, and video codecs, like HEVC [2] or VVC [3], are designed for the perceptual characteristics of the human visual system. These codecs compress the visual data in a

lossy procedure. Thus, not only the redundancy is decreased, but also deviations between the coded and the original data are introduced. For traditional image and video coding, irrelevancy reduction removes parts of the original data, for which the human visual system is less sensitive. A typical example for this are high-frequency components. Since the computer vision algorithms have different characteristics compared to the human visual system, the relevancy of certain image details varies as well. As machine-to-machine communication gains importance, novel coding schemes specifically optimized for machines and algorithms as information sink are required. As a result, an ad-hoc group on *Video Coding for Machines (VCM)* [4] has been introduced by MPEG in 2019. Their goal is to standardize a bit stream format optimized for machine-to-machine scenarios.

Adapting neural compression for VCM scenarios usually requires annotated and ideally pristine, i.e. uncoded, image and video data. However, availability of this type of data is limited and annotating images or videos is time-consuming and associated with high costs. Therefore, there is a demand of annotation-free optimization methods for VCM scenarios.

In this paper, we focus on improving the training framework for VCM-optimized neural image compression following the compress-then-analyze paradigm [5]. Our approach does not require annotated data and achieves even better coding results when compared with VCM optimization with available ground truth data.


## 2. NEURAL IMAGE COMPRESSION FOR MACHINES

### 2.1. Neural Image Compression


The research field of image compression is currently dominated by compressive autoencoders [6]. They form an end-to-end trainable neural network, which transforms the original image  $x$  into a latent space representation  $y$ . The latent space is quantized to  $\hat{y}$ , entropy coded into the bit stream  $b$  and transmitted to the decoding device. The decoding transform then reconstructs the image  $\hat{x}$  from the quantized latent space.

During the training process, the quantization is replaced

The authors gratefully acknowledge that this work has been funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) under project number 426084215.

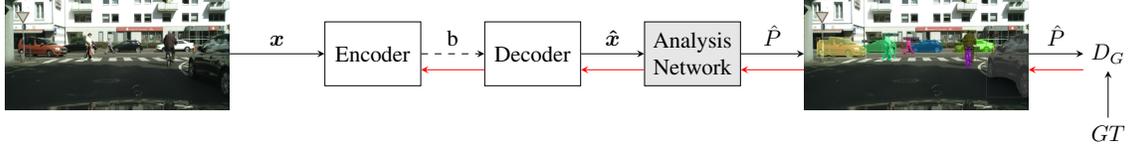

**Fig. 1.** Traditional training strategy with ground truth data. Red arrows denote gradient flow during backpropagation. Weights in shaded blocks are not updated during optimization.

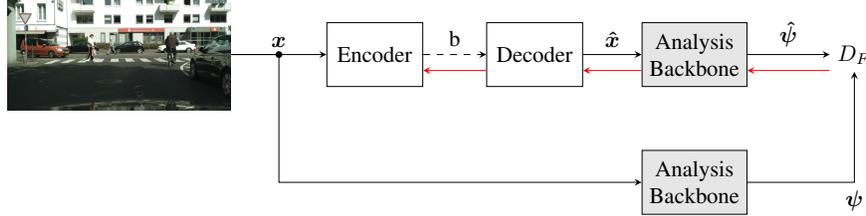

**Fig. 2.** Training strategy with feature loss. Red arrows denote gradient flow during backpropagation. Weights in shaded blocks are not updated during optimization.

by an addition with uniform noise. The rate-distortion loss  $\mathcal{L}_{RD}$  for the optimization of a compressive autoencoder consists of an estimate of the bit rate  $R$  and a distortion measure  $D(\hat{x}, x)$ . When the compression network is optimized for the human visual system, common distortion metrics are MSE or MS-SSIM [7]. To weight the bit rate and the distortion metric, a trade-off parameter  $\lambda$  can be defined, resulting in the following loss function:

$$\mathcal{L}_{RD} = R + \lambda D(\hat{x}, x). \quad (1)$$

Multiple models at different rate points can be trained by varying the parameter  $\lambda$ .

## 2.2. VCM Optimization with Ground Truth Data

In order to optimize neural compression for VCM scenarios, other distortion metrics have to be used. A common approach is to borrow the loss of the analysis task [8]. Here, the reconstructed image  $\hat{x}$  is fed into the task network  $T$  and the resulting predictions  $\hat{P} = T(\hat{x})$  are compared with the ground truth data  $GT$ . The distortion metric  $D_G$  with ground truth data is then calculated as:

$$D_G(\hat{x}, GT) = \mathcal{L}_{TASK}(T(\hat{x}), GT), \quad (2)$$

where  $\mathcal{L}_{TASK}$  represents the loss used for the optimization of the analysis network. The resulting gradients flow through the frozen analysis network into the compression network. This type of training strategy is depicted in Fig. 1.

However, as annotated data is required, the amount of training data is typically limited. Moreover, since erroneous predictions of the task network may even occur on uncompressed data, a potentially significant portion of the resulting task loss is not related to the compression performance but to the general shortcomings of the task network itself.

## 2.3. VCM Optimization with Feature-based Losses


One solution for the VCM scenario is to train the compression network to generate images which result in similar predictions on the compressed data as they would be on the original pristine data. Such an approach is the use of feature-based metrics [9, 10] for optimization. As depicted in Fig. 2, the initial layers of the backbone  $f_B$  of the task network are used to calculate intermediary features  $\psi = f_B(x)$  and  $\hat{\psi} = f_B(\hat{x})$  of the original and the reconstructed image, respectively. The feature-based distortion  $D_F$  is then derived by calculating the difference of both features, e.g. via the SSE:

$$D_F(\hat{\psi}, \psi) = \sum (\hat{\psi} - \psi)^2. \quad (3)$$

A major advantage of this method is that it does not require annotated training data. Therefore, this loss can be used to train on non-annotated data, which is easier to obtain, or to adapt the compression network for a different domain. However, the coding results in [10] show that models trained with a feature-based loss can not reach the performance of models trained with task loss using ground truth data. Thus, there is still a need for a VCM loss, which works on non-annotated data and matches or surpasses the performance of the task loss with ground truth.

## 3. ANNOTATION-FREE OPTIMIZATION OF IMAGE CODING FOR MACHINES

In this paper, we propose to use the predictions of the task model on the uncompressed image as pseudo ground truth for the task loss during VCM optimization. So far, pseudo ground truth has only been used for the evaluation of VCM codecs on unlabeled data [11]. Harell et al. [12] showed that

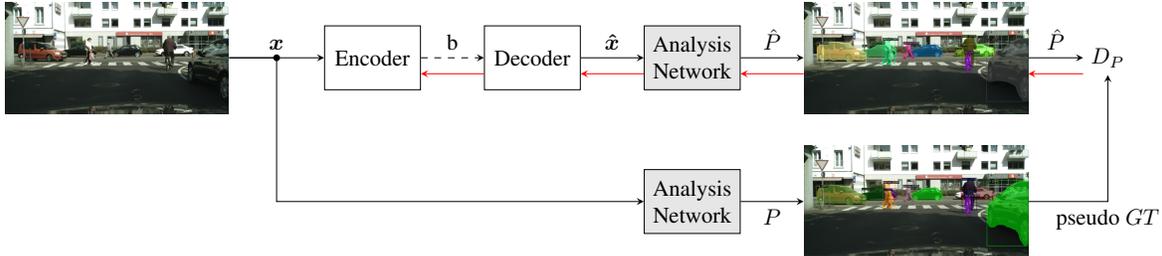

**Fig. 3.** Proposed training strategy with pseudo ground truth. Red arrows denote gradient flow during backpropagation. Weights in shaded blocks are not updated during optimization.

performing feature matching in deeper layers of the analysis network leads to a better compression performance in the VCM scenario. Our approach can be seen as a continuation of this insight. Instead of evaluating intermediate features, we compare the final predictions. An overview of our training strategy is shown in Fig. 3. The image  $x$  is compressed in a lossy way by the image compression network, resulting in the reconstruction  $\hat{x}$ . The reconstructed image is analyzed by the task network to obtain the predictions  $\hat{P} = T(\hat{x})$ . Furthermore, the predictions  $P = T(x)$  on the original image are derived. The distortion  $D_P$  is calculated by comparing the predictions  $\hat{P}$  on the reconstructed frame  $\hat{x}$  with the pseudo ground truth. The distortion measure (2) is then modified as follows:

$$D_P(\hat{x}, x) = \mathcal{L}_{TASK}(T(\hat{x}), T(x)). \quad (4)$$

Identical to the training with ground truth data, the obtained gradients are backpropagated through the analysis network into the compression network.

Using pseudo ground truth has two major advantages. First, it does not require any annotations. Thus, the strategy can be used to optimize compression networks with a larger amount of training data, which could otherwise not be used due to a lack of annotations. Second, it focuses the loss on the direct influence of compression artifacts on the task performance. Since the analysis networks are not free of errors, even on uncompressed data, parts of the loss using ground truth data is not related to the performance of the compression network but due to the limitations of the analysis network instead. Therefore, these errors can hardly be corrected by the compression network. In contrast, when the task loss is derived with respect to the pseudo ground truth, the whole loss is related to the deviation between the reconstructed and the original image. Hence, it is a more reliable measure to calculate the coding distortion for the VCM scenario.

We validate our annotation-free training strategy with an image compression autoencoder similar to [13]. However, we replace the zero-mean Gaussian model of the latent space with a Laplacian distribution with mean and scale parameter, as this has shown better performance in [14]. According to [15], we replace the activations with rectified linear units

(ReLUs). The architecture of the coder is depicted in Fig. 4. Since the applied compression network, based on an autoencoder with hyperprior, shares a similar structure with most neural image compression networks, it can be assumed that the results of the different training strategies for VCM can also be transferred to other image compression approaches.

## 4. EXPERIMENTS

We investigate the tasks of instance segmentation and semantic segmentation on the Cityscapes [16] dataset. The dataset consists of 2975 RGB images in the training set and additional 500 images in the validation set. For each image, pixel-accurate masks are available. Each labeled image is extracted from a 30 frame long video sequence. For the first task, we apply a Mask R-CNN [17] network with feature-pyramid structure [18] from the model zoo of the Detectron2<sup>1</sup> library. For semantic segmentation we use a pretrained DeepLabV3+ [19] model with MobileNetv2 [20] backbone<sup>2</sup>. We train and compare separate image compression networks for both tasks using ground truth data and our proposed pseudo ground truth. As additional reference, we also obtained models trained with feature-based losses. For Mask R-CNN, the feature loss is calculated in the 'p2' feature space in the feature pyramid, whereas for DeepLabV3+, we compare the high-level features generated from the MobileNetv2 backbone. Furthermore, VVC intra coding from the reference software VTM<sup>3</sup> in version 20.2 is applied.

### 4.1. Training


Before the models are finetuned on the VCM task, we first pretrain the network for 125.000 iterations using MSE loss as distortion metric. We then obtain multiple task-optimized models at different bit rates by switching the distortion metric to the task loss using either ground truth data or pseudo ground truth. For the Mask R-CNN models, we set

<sup>1</sup><https://github.com/facebookresearch/detectron2>


<sup>2</sup><https://github.com/VainF/DeepLabV3Plus-Pytorch>

<sup>3</sup><https://vcgit.hhi.fraunhofer.de/jvet/>




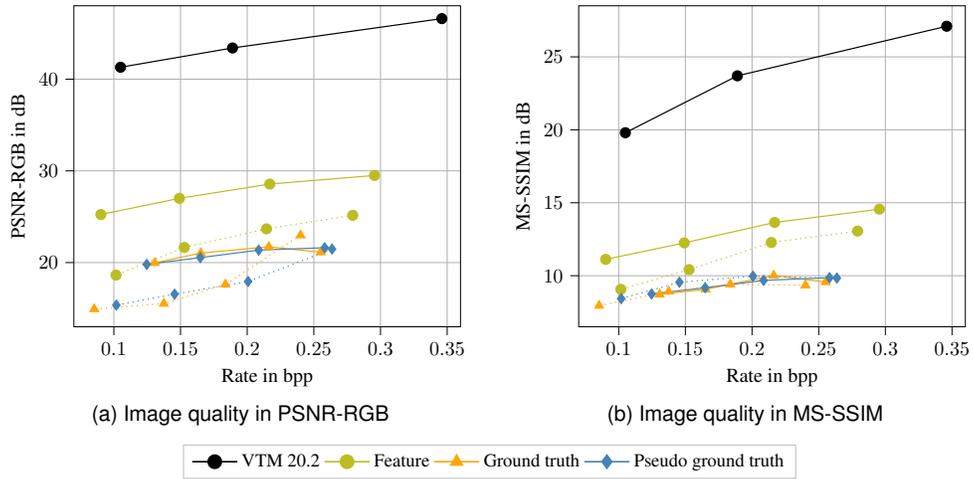

**Fig. 5.** Coding results for image metrics PSNR and MS-SSIM averaged over the 500 Cityscapes validation images. Solid lines represent models trained for Mask R-CNN, whereas dotted lines symbolize the DeepLabV3+ models.

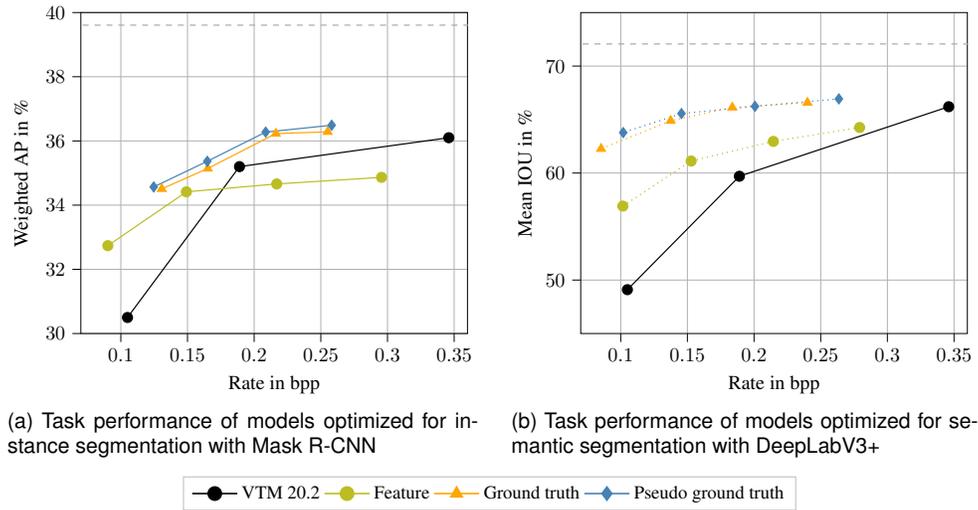

**Fig. 6.** Coding results for task metrics weighted average precision and mean intersection over union averaged over the 500 Cityscapes validation images. Solid lines represent models trained for Mask R-CNN, whereas dotted lines symbolize the DeepLabV3+ models. Dashed grey line corresponds to task performance on uncompressed data.

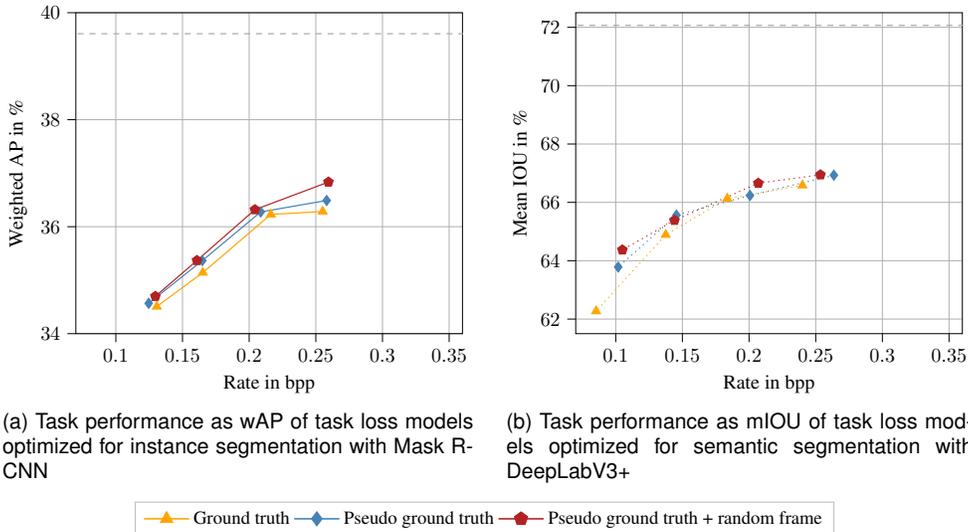

**Fig. 7.** Coding results for task metrics for task loss models. Solid lines represent models trained for Mask R-CNN, whereas dotted lines symbolize the DeepLabV3+ models. Dashed grey line corresponds to task performance on uncompressed data.

**Table 2.** Bjøntegaard delta quality in percentage points (pp) and Bjøntegaard delta rate in % for the VCM metrics with the task loss with and without temporal augmentation using the model trained with ground truth data as anchor. BD + metric denotes the average difference in percentage points (pp) in the corresponding metric for the overlapping bit rate range. Higher is better. BDR + metric denotes the average rate difference in % for equivalent task performance. Lower is better. Best values are set in bold.

	Pseudo GT labeled frame	Pseudo GT random frame
BD wAP	0.18 pp	<b>0.30 pp</b>
BD mIOU	0.23 pp	<b>0.34 pp</b>
BDR wAP	-5.1 %	<b>-6.8 %</b>
BDR mIOU	-7.5 %	<b>-8.2 %</b>

all available frames to the training data, we train for the same amount of steps and thus, ensure a fair comparison. In Fig. 7, we depict the coding results for the task metrics of this approach in comparison with the ground truth data and pseudo ground truth calculated on the labeled validation frames. The temporal augmentation can further improve the coding performance of the model with pseudo ground truth. As shown in Table 2, we obtain BD gains of up to 0.34 pp over training with ground truth data and 0.12 pp with respect to pseudo ground truth without temporal augmentation. This highlights one of the key benefits of pseudo ground truth over ground truth data. Since annotations are no longer required, a larger dataset can be used to optimize the compression networks for the VCM scenario.

## 6. CONCLUSION

In this paper, we proposed the use of the prediction results of computer vision algorithms on uncompressed images as pseudo ground truth for the optimization of neural image compression for machines. This method allows to train neural compression for VCM scenarios on non-annotated image data. We evaluated the approach by comparing it with the training on ground truth data and a strategy, which measures the similarity in the feature space for estimating the distortion.

The conducted experiments prove that pseudo ground truth can be successfully used for optimizing neural image compression with respect to computer vision tasks. Since the task loss with pseudo ground truth only focuses on the differences between the prediction results on the compressed and original frames, the real impact of the compression is evaluated. In contrast, the loss using ground truth data additionally contains the present errors of the task model. Therefore, only a fraction of the calculated loss is related to the performance of the compression network. Our method achieves average rate savings of about 5.1 % with respect to wAP on Mask R-CNN and 7.5 % for mIOU on DeepLabV3+. Since our method does not require annotated training data, we can further improve the performance by using a larger amount of training data. With this enlarged training set, we obtain even higher rate savings of 6.8 % for wAP and 8.2 % for mIOU.

As annotated and pristine video data is hardly available, this method is especially suited for the training of neural video compression in VCM scenarios. Therefore, future research can investigate whether similar gains can be reached when applying pseudo ground truth for the optimization of neural video compression.

## 7. REFERENCES

- [1] Sandvine, “Sandvine global internet phenomena report 2023,” Tech. Rep., Sandvine, 2023.
- [2] Gary J. Sullivan, Jens-Rainer Ohm, Woo-Jin Han, and Thomas Wiegand, “Overview of the high efficiency video coding (HEVC) standard,” *IEEE Transactions on Circuits and Systems for Video Technology*, vol. 22, no. 12, pp. 1649–1668, 2012.
- [3] Benjamin Bross, Ye-Kui Wang, Yan Ye, Shan Liu, Jianle Chen, Gary J. Sullivan, and Jens-Rainer Ohm, “Overview of the versatile video coding (VVC) standard and its applications,” *IEEE Transactions on Circuits and Systems for Video Technology*, vol. 31, no. 10, pp. 3736–3764, 2021.
- [4] Yuan Zhang and Patrick Dong, “MPEG-M49944: Report of the AhG on VCM,” Tech. Rep., Moving Picture Experts Group (MPEG) of ISO/IEC JTC1/SC29/WG11, 2019.
- [5] Alessandro Redondi, Luca Baroffio, Lucio Bianchi, Matteo Cesana, and Marco Tagliasacchi, “Compress-then-analyze versus analyze-then-compress: What is best in visual sensor networks?,” *IEEE Transactions on Mobile Computing*, vol. 15, no. 12, pp. 3000–3013, 2016.
- [6] Johannes Ballé, Valero Laparra, and Eero P. Simoncelli, “End-to-end optimized image compression,” in *Proc. International Conference on Learning Representations*, 2017, pp. 1–27.
- [7] Zhou Wang, Eero Simoncelli, and Alan Bovik, “Multi-scale structural similarity for image quality assessment,” in *Proc. Asilomar Conference on Signals, Systems and Computers*, 2003, vol. 2, pp. 1398–1402.
- [8] Hyomin Choi and Ivan V. Bajić, “Scalable image coding for humans and machines,” *IEEE Transactions on Image Processing*, vol. 31, pp. 2739–2754, 2022.
- [9] Kristian Fischer, Fabian Brand, Christian Herglotz, and André Kaup, “Video coding for machines with feature-based rate-distortion optimization,” in *Proc. IEEE International Workshop on Multimedia Signal Processing*, 2020, pp. 1–6.
- [10] Kristian Fischer, Fabian Brand, and André Kaup, “Boosting neural image compression for machines using latent space masking,” *IEEE Transactions on Circuits and Systems for Video Technology*, pp. 1–13, 2022.
- [11] Kristian Fischer, Markus Hofbauer, Christopher Kuhn, Eckehard Steinbach, and André Kaup, “Evaluation of video coding for machines without ground truth,” in *Proc. IEEE International Conference on Acoustics, Speech and Signal Processing*, 2022, pp. 1616–1620.
- [12] Alon Harell, Anderson de Andrade, and Ivan V. Bajić, “Rate-distortion in image coding for machines,” in *Proc. Picture Coding Symposium*, 2022, pp. 199–203.
- [13] Johannes Ballé, David Minnen, Saurabh Singh, Sung Jin Hwang, and Nick Johnston, “Variational image compression with a scale hyperprior,” in *Proc. International Conference on Learning Representations*, 2018, pp. 1–47.
- [14] Lei Zhou, Chunlei Cai, Yue Gao, Sanbao Su, and Junmin Wu, “Variational autoencoder for low bit-rate image compression,” in *Proc. IEEE Conference on Computer Vision and Pattern Recognition Workshops*, June 2018, pp. 2617–2620.
- [15] Kristian Fischer, Christian Forsch, Christian Herglotz, and André Kaup, “Analysis of neural image compression networks for machine-to-machine communication,” in *Proc. IEEE International Conference on Image Processing*, 2021, pp. 2079–2083.
- [16] Marius Cordts, Mohamed Omran, Sebastian Ramos, Timo Rehfeld, Markus Enzweiler, Rodrigo Benenson, Uwe Franke, Stefan Roth, and Bernt Schiele, “The cityscapes dataset for semantic urban scene understanding,” in *Proc. IEEE Conference on Computer Vision and Pattern Recognition*, 2016, pp. 3213–3223.
- [17] Kaiming He, Georgia Gkioxari, Piotr Dollár, and Ross Girshick, “Mask R-CNN,” in *Proc. IEEE International Conference on Computer Vision*, 2017, pp. 2980–2988.
- [18] Tsung-Yi Lin, Piotr Dollár, Ross Girshick, Kaiming He, Bharath Hariharan, and Serge Belongie, “Feature pyramid networks for object detection,” in *Proc. IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 936–944.
- [19] Liang-Chieh Chen, Yukun Zhu, George Papandreou, Florian Schroff, and Hartwig Adam, “Encoder-decoder with atrous separable convolution for semantic image segmentation,” in *Proc. European Conference on Computer Vision*, September 2018.
- [20] Mark Sandler, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen, “Mobilenetv2: Inverted residuals and linear bottlenecks,” in *Proc. IEEE Conference on Computer Vision and Pattern Recognition*, June 2018.
- [21] Kristian Fischer, Christian Herglotz, and André Kaup, “On intra video coding and in-loop filtering for neural object detection networks,” in *Proc. IEEE International Conference on Image Processing*, 2020, pp. 1147–1151.