

Multiplicative point process as a model of financial markets

Vygintas Gontis and Bronislovas Kaulakys

Institute of Theoretical Physics and Astronomy, Vilnius University, A. Gostauto 12, 2600 Vilnius, Lithuania

Received: 03/05/03

Abstract. Signals consisting of a sequence of pulses show that inherent origin of the $1=f$ noise is a Brownian fluctuation of the average interevent time between subsequent pulses of the pulse sequence. In this paper we generalize the model of interevent time to reproduce the variety of self-affine time series exhibiting power spectral density $S(f)$ scaling as a power of the frequency f . Furthermore, we analyze a relation between the power-law correlations and the origin of the power-law probability distribution of the signal intensity. We introduce the stochastic multiplicative model for the time intervals between point events and analyze the statistical properties of the signal numerically and analytically. Such model system exhibits power-law spectral density $S(f) \sim 1/f$ for various values of α , including $\alpha = 1/2$; 1 and $3/2$. Explicit expressions for the power spectra in a low frequency limit and for the distribution density of the interevent time are obtained. The counting statistics of the events is analyzed numerically and analytically, as well. The specific interest of our analysis is related with the financial markets, where long-range correlations of price fluctuations largely depend on the number of transactions. We analyze the spectral density and counting statistics of the number of transactions. The model reproduces spectral properties of the real markets and explains the mechanism of power law distribution of trading activity. The study provides evidence that the statistical properties of the financial markets are enclosed in the statistics of the time interval between trades. Multiplicative point process serves as a consistent model for this statistics.

Key words: statistical processes, financial markets, stochastic modelling, point processes, icker noise.

PACS. 02.50.Ey Stochastic Processes { 05.40.a Fluctuation phenomena, noise and Brownian motion { 05.10.Gg Stochastic analysis methods (Fokker-Planck, Langevin, etc.) { 89.65.Gh Economics, business, and financial markets

1 Introduction

Complex collective phenomena usually are responsible for the power-laws which are universal and independent of the microscopic details of the phenomenon. Examples in physics are numerous. Power-laws are intrinsic features of the economic and financial data, as well. The aim of this contribution is to analyze a relationship between the origin of the power law distribution and the power-law correlations in financial time series.

There are numerous studies of the power-law probability distributions in various economic systems [1,2,3,4,5,6,8]. The key result in recent findings is that cumulative distributions of returns and trading activity can be well described by a power-law asymptotic behavior, characterized by an exponent $\alpha > 3$, well outside the stable Levy regime $0 < \alpha < 2$ [8]. Empirical studies confirm a stable functional form for different time scales.

The random multiplicative process built into the model of wealth distribution yields Pareto style power law [1]. The generalized Lotka-Volterra dynamics is in the use for various systems including financial markets [5]. However, these models generically lead to the non-universal exponents and do not explain the power-law correlations

and spectral density of financial time series [7]. The time-correlations in financial time series are studied extensively as well [8,9,10]. Gopikrishnan et al [8,9] provided empirical evidence that the long-range correlations for volatility are due to trading activity, measured by a number of transactions N .

Recently we adapted the model of $1=f$ noise based on the Brownian motion of time interval between subsequent pulses, proposed by Kaulakys and Meskuskas [11,12,13,14] to model share volume traded in the financial markets [15]. The idea to transfer long time correlations into the stochastic process of the time interval between trades or time series of trading activity is in consistency with the detailed studies of the empirical financial data [8,9] and fruitfully reproduces spectral properties of the financial time series [15]. However, the investigation of the model revealed, that the simple additive Brownian model of time interval between trades failed to reproduce the power-law probability density function (pdf) of the trading activity [16]. On the other hand, several authors have shown empirically that the fluctuations of various financial time series possess multifractal statistics [17,18,19]. Therefore, we introduce the stochastic multiplicative model for time

interval between trades and analyze the statistical properties of the trading activity numerically and analytically. The model is in consistence with the results of statistical analyzes of the empirical financial time series and reveals the relationship between the power-law probability distribution and the power-law spectral density of the financial time series.

2 The model

We consider a signal $I(t)$ as a sequence of the random correlated pulses

$$I(t) = \sum_k a_k(t - t_k) \quad (1)$$

where a_k is a contribution to the signal of one pulse at the time moment t_k , for example, a contribution of one transaction to the financial data. Signal (1) represents a point processes used in a large variety of systems with the flow of point objects or subsequent actions. When $a_k = a$ is constant, the point process is completely described by the set of the times of events t_k , or equivalently by the set of interevent intervals $\tau_k = t_{k+1} - t_k$. Various stochastic models of τ_k can be introduced to define a stochastic point process. Kaulakys and Meskauskas [11,12,13,14] showed analytically that the relatively slow Brownian fluctuations of the interevent time τ_k yield fluctuations of the signal (1).

Power spectral density of the signal $I(t)$ is

$$S(f) = \lim_{T \rightarrow \infty} \frac{1}{T} \int_0^T I(t) \exp(-i2\pi ft) dt \quad (2)$$

$$= \lim_{T \rightarrow \infty} \frac{1}{T} \sum_{k=k_{min}}^{k_{max}} \sum_{q=k_{min}}^{k_{max}} \exp(-i2\pi f(k;q))$$

where the brackets $\langle \dots \rangle$ denote the averaging over the realizations of the process, $T = t_f - t_i$ is the observation time, $(k;q) = t_{k+q} - t_k$ is the time difference between the pulses occurrence times t_{k+q} and t_k , while k_{min} and k_{max} are minimal and maximal values of the index k in the interval of observation T .

We adapt and generalize the model of 1/f noise previously proposed in [11,12,13,14] to model the share volume traded in the financial markets [8,9]. It is useful to define the discrete time series in equal time intervals Δ . Integration of the signal $I(t)$ in the subsequent time intervals of length Δ results in the discrete time series and, by analogy with financial time series, we will call it the volume V_j ,

$$V_j = \int_{t_j}^{t_{j+\Delta}} I(t) dt = \sum_{t_j < t_k < t_{j+\Delta}} a_k; \quad t_j = j \Delta \quad (3)$$

The number of trades N_j in the time interval t_j ($t_j + \Delta$) is defined by the same equation (3) with $a_k = 1$ and

$N_j = \sum_{j=1}^n V_j$. Then the power spectral density $S(f_s)$ of the discrete signal N_j may be calculated by the FFT as

$$S(f_s) = \frac{1}{d^n} \sum_{j=1}^{2n} N_j \exp(-i2\pi f_s(j-1)) \quad (4)$$

Here the discrete frequencies $f_s = (s-1)/T$, $s = 1; 2; \dots; n$ and $T = 1/d$. For frequencies $f_s < 1/d$ the power spectral density defined by equation (4) coincides with that by equation (2).

In this paper we investigate the statistical properties of the time series N_j , when the sequence of interevent time τ_k is generated by the multiplicative stochastic process. First of all the multiplicativity is an essential feature of the processes in economics [1,4]. Multiplicative stochastic processes yield multifractal intermittency and are able to produce the power-law probability distribution functions. We base our study on the generic multiplicative process for the interevent times, written as

$$\tau_{k+1} = \tau_k + \frac{1}{k} + \sigma_k \epsilon_k \quad (5)$$

Here the interevent time τ_k fluctuates due to the external random perturbation by a sequence of uncorrelated normally distributed random variable ϵ_k with zero expectation and unit variance, σ denotes the standard deviation of the white noise and 1 is a damping constant.

We will restrict the discussion of the interevent time according to equation (5) in the finite interval $[t_{min}; t_{max}]$, i.e., $0 < t_{min} < \tau_k < t_{max}$. The most natural case is the pure multiplicativity of τ_k , i.e., when $\sigma = 1$. Other values of σ reproduce the power laws as well and explicit expressions can be derived without the loss of generality.

The iterative relation (5) can be rewritten as Langevine stochastic differential equation in k -space.

$$\frac{d\tau}{dk} = \frac{1}{k} + \sigma \epsilon(k) \quad (6)$$

Here we interpret k as continuous variable while

$$h(k) = \langle \tau(k) \rangle$$

The steady state solution of the corresponding stationary Fokker-Planck equation with zero flow gives the probability density function for τ_k in the k -space (see, e.g., [22])

$$P_k(\tau) = C \tau^{-2} \quad (7)$$

and C has to be defined from the normalization

$$\int_{t_{min}}^{t_{max}} P_k(\tau) d\tau = 1$$

The solution (7) assumes Ito convention involved in the relation between expressions (5), (6) and (7).

As the probability distribution function (7) is of the power-law form, we expect that this would result in the power-law behavior in other statistics, as well. In the next Section we will obtain the power spectral density defined by equation (2).

3 Power spectral density

The power spectral density is a well-established measure of long time correlations and is widely used in stochastic systems. As it has been already shown [11,12,13,14] the point process with the Brownian interevent time exhibits 1/f noise.

We will derive the formula for the power spectral density of the multiplicative stochastic point process model, defined by equations (5) and (6) for the interevent time.

Let us rewrite equation (2) as [14]

$$S(f) = \lim_{T \rightarrow \infty} \frac{2\bar{a}^2}{T} \langle \chi_{k;q}(2\pi f) \rangle \quad (8)$$

where $\langle \chi_{k;q}(2\pi f) \rangle$ is the characteristic function for the probability distribution of $(k;q)$. For the normal distribution of $(k;q)$ formula (8) takes the form

$$S(f) = \lim_{T \rightarrow \infty} \frac{2\bar{a}^2}{T} \exp\left[-\frac{1}{2} (2\pi f)^2 \sigma^2(k;q)\right] \quad (9)$$

where σ^2 is the variance of $(k;q)$, the time difference between the pulses occurrence times t_{k+q} and t_k . For $\sigma = 1$ the time difference $(k;q)$ may be expressed from the solution of multiplicative stochastic equation (6) as

$$(k;q) = \prod_{l=1}^k \exp\left(-\frac{1}{2} q^2\right) + \prod_{j=1}^q X_j \quad (10)$$

Averaging over the normal distributions of uncorrelated X_j results in explicit expressions for the mean $\langle (k;q) \rangle$ and variance $\sigma^2(k;q)$.

In general, for any σ , the perturbative solution of equation (6) yields

$$\begin{aligned} \langle (k;q) \rangle &= kq + \frac{2}{3} k^2 q^2 + o(q^3) \quad (11) \\ \sigma^2(k;q) &= \frac{2}{3} k^2 q^3 \end{aligned}$$

In the low frequency limit $f \ll \frac{1}{k}$ we can replace the summation over k and q by the integration and take into account only the first order terms of equation (11) in the expression for the power spectral density (9). This yields

$$\begin{aligned} S(f) &= \frac{4C\bar{a}^2}{\pi} \int_0^{x_{max}} \int_0^{x_{min}} \exp\left[-\frac{1}{2} \left(q + \frac{2}{3} k^2 q^2\right) g dq\right] dk \\ &= \frac{2C\bar{a}^2}{\pi} \frac{1}{(3/2)f} \text{I}_{erf}(x_{min}; x_{max}) \quad (12) \end{aligned}$$

$$\text{Re} \int_{x_{min}}^{x_{max}} \exp\left[-i\left(\frac{\pi}{4} - \frac{1}{2} \text{erfc}\left(\frac{x}{\sqrt{2}}\right)\right) x^{\frac{1}{2}} dx\right] \text{I}_{erf}(x_{min}; x_{max}) = \quad (13)$$

where

$$h_{ki} = \frac{T}{k_{max} k_{min}}$$

is expectation of k . Here we introduce the scaled variable $x = \frac{f}{3/2}$ and

$$x_{min} = \frac{f}{3/2} \frac{1}{k_{min}}; \quad x_{max} = \frac{f}{3/2} \frac{1}{k_{max}}$$

Expression of the power spectral density (12) is appropriate for numerical calculations of the generalized multiplicative point process defined by equations (1) and (5). In the limit $k_{min} \rightarrow 0$ and $k_{max} \rightarrow \infty$ we obtain an explicit expression for $S(f)$

$$S(f) = \frac{C\bar{a}^2}{\pi} \frac{1}{(3/2)f} \frac{\left(\frac{1}{2} + \frac{1}{3/2}\right)}{\cos\left(\frac{1}{2}\left(\frac{1}{3/2}\right)\right)} \quad (14)$$

Equation (14) reveals that the multiplicative point process is a model of a signal with the power spectral density $S(f) \sim \frac{1}{f}$ with the scaling exponent

$$= 1 + \frac{2}{3} = \frac{5}{3} \quad (15)$$

It is likely that such a stochastic model with parameters in the region $0.5 < \sigma < 1.5$ may be adaptable for the wide variety of different systems. In this paper we will investigate applicability of the model for the financial market.

First of all we compare our analytical results (12), (13) and (14) with the numerical calculations of the power spectral density according to equations (2) and (5). In Fig. 1 we present the numerically calculated power spectral density $S(f)$ of the signal $I(t)$ for $\sigma = 1$ and $\sigma = \frac{2}{3}$, $\sigma = 0$, -0.4 and $+0.5$. Numerical results confirm that multiplicative point process exhibits the power spectral density scaled as $S(f) \sim 1/f$. Equation (12) describes the model power spectral density very well in the wide range of parameters. The explicit formula (14) gives a good approximation of power spectral density for the parameters when $\sigma > 1$. In Fig. 2 we present numerical results of the power spectral density calculated for multiplicative point process with $\sigma = 0.5$. In this case analytical expressions (12), (13) and (14) describe power spectral density very well in a wide range of the parameter values. These results confirm earlier finding [11,12,13,14] that power spectral density is related to the probability distribution of the interevent time k and 1/f noise occurs when this distribution is at, i.e., $\sigma = 0$.

4 Power-law probability distribution function

The statistics of trading activity N , i.e., the number of trades per time interval Δ is very significant in financial markets. The consistence of any model of financial markets mostly depends on its ability to reproduce empirically measured probability distribution of the number of trades

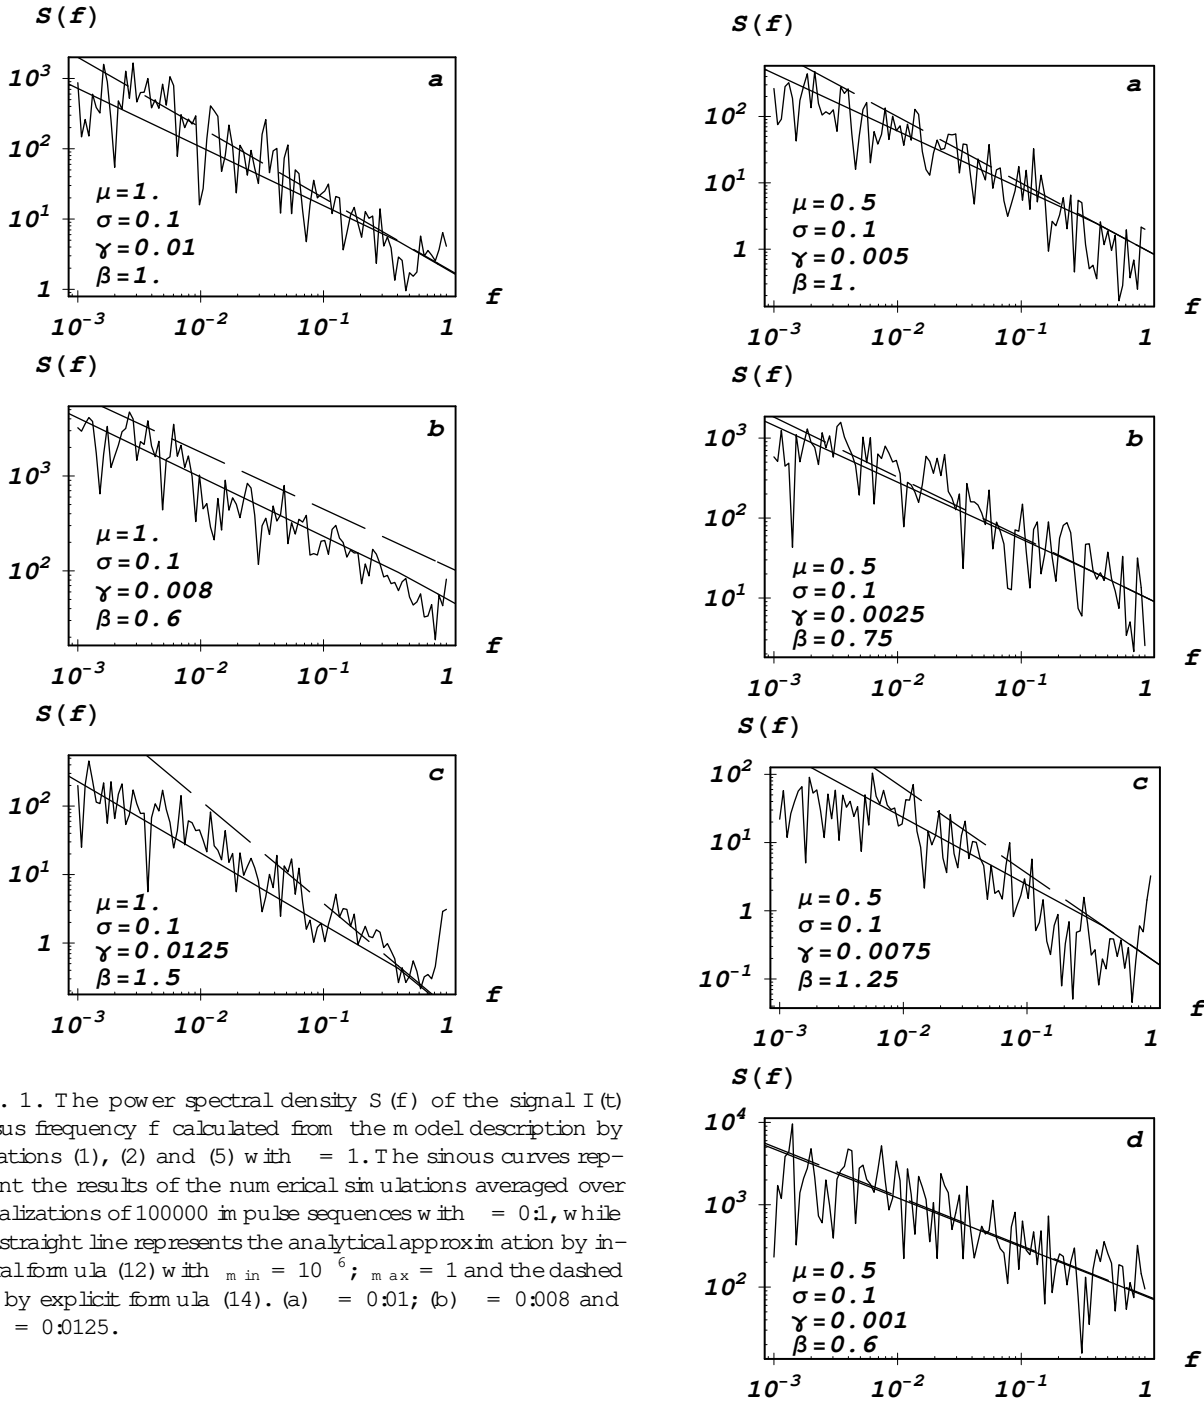


Fig. 1. The power spectral density $S(f)$ of the signal $I(t)$ versus frequency f calculated from the model description by equations (1), (2) and (5) with $\gamma = 1$. The sinous curves represent the results of the numerical simulations averaged over 5 realizations of 100000 in pulse sequences with $\gamma = 0.1$, while the straight line represents the analytical approximation by integral formula (12) with $m_{min} = 10^{-6}$; $m_{max} = 1$ and the dashed line by explicit formula (14). (a) $\gamma = 0.01$; (b) $\gamma = 0.008$ and (c) $\gamma = 0.0125$.

Fig. 2. The same as in Fig.1 but with $\gamma = 0.5$. (a) $\gamma = 0.005$; (b) $\gamma = 0.0025$ and (c) $\gamma = 0.001$; (d) $\gamma = 0.0001$.

N , defined by equation (3). Intuitively the pdf of N has to be related with pdf of τ or τ^{-1} . The pdf of k in k space is already been given by formulae (7). It is obvious that in the real time scale t the pdf of m may be written as

$$P_t(\tau) = P_k(k) = C^0 \tau^{-1} \quad (16)$$

where $C^0 = C \tau$ is a new normalization constant.

For the pure multiplicative model with $\gamma = 1$ equations (10) and (11) define a relationship between N and

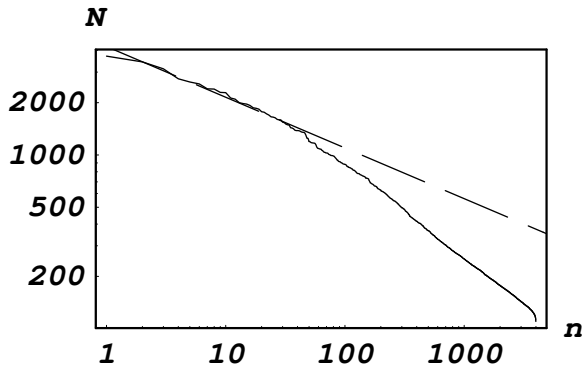


Fig. 3. Amplitude versus rank plot, $N(n)$, defining cumulative distribution $P_{>}(N) = \frac{1}{N}$ with the parameters of the model $\alpha = 1$, $\beta = 0.1$ and $\gamma = 0.0085$. Dashed line represents asymptotic plot $N(n) \propto n^{-3.4}$ with $\alpha = 3.4$

after the substitution $h(k; q) = \frac{1}{d} \ln \frac{q!}{k!}$ and $q = N$, i.e.,

$$d = N + \frac{1}{2} N^2: \tag{17}$$

This relation may be used for definition of pdf $P(N)$ for N from the relation $P(N) dN = P_t(\cdot) d\cdot$. We have

$$P(N) = \frac{C \frac{1}{d} (1 + N)}{N^{3+} (1 + \frac{1}{2} N)^{3+}}: \tag{18}$$

This equation yields limiting cumulative distributions

$$P_{>}(N) = \int_N^{\infty} P(N) dN \sim \begin{cases} \frac{1}{N^{2+}}; N \rightarrow 0 \\ \frac{1}{N^{4+2}}; N \rightarrow \infty \end{cases} \tag{19}$$

for N .

Let us compare N probability distribution function obtained from the numerical simulation of the model with the analytical result (18) and (19). It is convenient to use amplitude versus rank plot (e.g. [23]) to define the power of the cumulative distribution $P_{>}(N) \propto 1/N$. We plot the value of the n -th rank variable $N(n)$ as a function of its rank n . If $P_{>}(N)$ behaves asymptotically when $n \rightarrow 0$ as a power-law, one gets a straight line in log-log coordinates of N and n , with the slope equal to -1 . In Fig. 3 we present the plot for $N(n)$ calculated numerically for pure multiplicative model ($\alpha = 1$) with the parameters yielding the best fit to the empirical data.

5 Discussion and conclusions

We have introduced the multiplicative stochastic model for the time interval between events of point process. Such model of time series has only few parameters defining statistical properties of the system, i.e., the power-law distribution functions and the scaled power spectral density of the signal. The ability of the model to simulate 1/f noise

as well as to reproduce signals with the values of slope between 0.5 and 1.5 promises a wide variety of possible applications.

Let us present shortly the possible interpretations of the empirical data of the trading activity in financial markets. With a very natural assumption of transactions in the financial markets as point events we can model the number of transactions N_j in equal time intervals Δt as outcome of described multiplicative point process. We already know from available studies [8] that the empirical data exhibit power spectral density in low frequency limit with the slope $\alpha \approx 0.7$. For the pure multiplicative model $\alpha = 1$ it corresponds to the case when $\beta = 2 = 2 - 2 \cdot \alpha \approx 0.3$. The corresponding cumulative distribution of N in the tail of high values (see equation 19) has the exponent $\alpha = 4 + 2 = 3.4$. This is in an excellent agreement with the empirical cumulative distribution exponent 3.4 defined in [8] for 1000 stocks of the three major US stock markets.

The numerical results confirm that the multiplicative stochastic model of the time interval between trades in the financial market is able to reproduce the main statistical properties of trading activity N and its power spectral density. The power-law exponents for interevent time and for cumulative distribution of trading activity as well as the slope of power spectral density are defined just by one parameter of the model $\beta = 2 - 2 \cdot \alpha$. This reveals the origin of the universal nature of the power-law distributions of trading activity in the financial markets. We do expect that multiplicative model of the time interval between the trades with more specific diffusion restrictions and more precisely adjusted parameters lies in the background of the financial markets statistics and may be useful in the financial time series analysis.

References

1. M. Levy, S. Solomon, Int. J. Mod. Phys. C 7, (1996) p. 595.
2. M. Levy M, and S. Solomon, Physica A 242, (1997) p. 90
3. D. Sornette, R. Cont, J. Phys. I (France) 7, (1997) p. 431
4. P. Gopikrishnan et al, Eur. Phys. J. B 3, (1998) p. 139-140.
5. A. Blank, S. Solomon, Physica A 287 (1-2), (2000) p. 279-288.
6. P. Richmond, Eur. Phys. J. B 20, (2001) p. 523-526.
7. J.P. Bouchaud, e-print: cond-mat/0008103 v.1, (2000).
8. P. Gopikrishnan et al, Physica A 287, (2000) p. 362-373.
9. P. Gopikrishnan et al, Phys. Rev. E 62 (4), (2000) p. R 4493-R 4496.
10. P. Cizeau, et al, Quantitative Finance 1, (2001) p. 217-222.
11. B. Kaulakys and T. Meskuskas, Phys. Rev. E 58, (1998) p. 7013.
12. B. Kaulakys and T. Meskuskas, Nonlinear Analysis: Modelling and Control, Vilnius, IM I, No 4, (1999).
13. B. Kaulakys, Phys. Lett. A 257 (1999) p. 37-42.
14. B. Kaulakys, Microelectronics Reliability 40, (2000) p. 1787-1790.
15. V. Gontis, Lithuanian J. Phys. 41, (2001) p. 551-555; cond-mat/0201514 (2002).

16. V. Gontis, *Nonlinear Analysis: Modelling and Control*, Vilnius, IM I 7 (1), (2002) p. 43-54; cond-m at/0211317 (2002).
17. F. Schmitt, et al., *Appl. Stoch. Mod. Data Anal.* 15, (1999) p. 29-53.
18. F. Schmitt, et al., *Int. J. Theor. Appl. Fin.*, 3, No 3, (2000) p. 361-364.
19. N. Vandewalle, M. Ausbos, *Eur. Phys. J.*, B 4, (1998) p. 257-261.
20. P. Richmond, S. Solomon, e-print: cond-m at/0010222 (2000).
21. B.D. Malamud, D.L. Turcotte, *Stat. Planning and Inference*, 80, (1999) p. 173-196.
22. C.W. Gardiner, *Handbook of Stochastic Methods* (Springer-Verlag, Berlin 1986)
23. J.P. Bouchaud and M. Potters, *Theory of Financial Risks* (University Press, Cambridge 2000)