

ON ASYMPTOTIC RELATIONS BETWEEN SINGULAR AND CONSTRAINED CONTROL PROBLEMS OF ONE-DIMENSIONAL DIFFUSIONS

JUKKA LEMPA AND HARTO SAARINEN

ABSTRACT. We study the asymptotic relations between certain singular and constrained control problems for one-dimensional diffusions with both discounted and ergodic objectives. By constrained control problems we mean that controlling is allowed only at independent Poisson arrival times. We show that when the underlying diffusion is recurrent, the solutions of the discounted problems converge in Abelian sense to those of their ergodic counterparts. Moreover, we show that the solutions of the constrained problems converge to those of their singular counterparts when the Poisson rate tends to infinity. We illustrate the results with drifted Brownian motion and Ornstein-Uhlenbeck process.

Keywords: Bounded variation control, Singular stochastic control, Diffusion process, Resolvent semigroup, Poisson process, Ergodic control, Vanishing discounting

2010 *Mathematics Subject Classification:* 49N25, 49L20, 60J60

1. INTRODUCTION

This paper is concerned with asymptotic relations between certain discounted and ergodic control problems for one-dimensional diffusions. More precisely, the following control problems are considered:

- (A) Classical singular stochastic control problems with both discounted and ergodic criteria
- (B) Constrained bounded variation control problems where controlling is allowed only at the independent Poisson arrival times with both discounted and ergodic criteria

These control problems are expected to be linked to each other via certain limiting properties. For instance, it is often expected that in item (A), the values of the problems with discounted criterion are connected to the ergodic problems in an Abelian sense, when the discounting factor vanishes. This relationship, often called the vanishing discount method

Date: November 1, 2021.

and sometimes used in a heuristic manner, can be used to solve the ergodic problems [22, 20, 11, 7].

Regarding item (B), the problems of this form have attracted attention in the recent years [15, 16, 23, 18, 19], for related studies in optimal stopping see [14, 10, 12]. In these problems, it is reasonable to expect that the value functions of the constrained problems should converge to the values of their singular counterparts as the Poisson arrival rate of the control opportunities tends to infinity.

The main contribution of this paper is that we prove these expectations to be correct for time-homogeneous control problems with one-dimensional diffusion dynamics; our findings are summarized in Figure 1. These diffusion models are important in many applications. Furthermore, the time-homogeneous structure allows explicit calculations, by which we can first solve the HJB-equations of both discounted and ergodic problems separately and then establish that the solutions satisfy the desired limiting properties. This is in contrast to the vanishing discount method, where the HJB-equation of the ergodic problem is solved using the solution of the discounted problem [20].

The remainder of the paper is organized as follows. In section 2, we set up the diffusion dynamics. In section 3, we introduce the control problems and study the functionals appearing in their analysis. The asymptotic relations are proved in section 4. Paper is concluded with an explicit examples in section 5.

2. UNDERLYING DYNAMICS

Let $(\Omega, \mathcal{F}, \{\mathcal{F}_t\}_{t \geq 0}, \mathbb{P})$ be a filtered probability space which satisfies the usual conditions. We consider an uncontrolled real-valued process X defined on $(\Omega, \mathcal{F}, \{\mathcal{F}_t\}_{t \geq 0}, \mathbb{P})$ which is modelled as a strong solution to the Itô stochastic differential equation

$$(1) \quad dX_t = \mu(X_t)dt + \sigma(X_t)dW_t, \quad X_0 = x,$$

where W_t is the Wiener process and the functions μ and σ are well-behaved (see [13] chapter 5). For notional convenience, we consider the case where the process evolves in \mathbb{R}_+ , even though all the results remain unchanged even if the state space would be replaced with any interval in \mathbb{R} .

We define the second-order linear differential operator \mathcal{A} , which represents the infinitesimal generator of the diffusion X , as

$$(2) \quad \mathcal{A} = \mu(x) \frac{d}{dx} + \frac{1}{2} \sigma^2(x) \frac{d^2}{dx^2}$$

and for a given $r > 0$, we respectively denote the increasing and decreasing solutions to the differential equation $(\mathcal{A} - r)f = 0$ by $\psi_r > 0$ and $\varphi_r > 0$. These solutions are often called the *fundamental solutions* and can be identified as the minimal r -excessive functions of the diffusion X (see [8] p. 19).

We denote by τ the first exit time from \mathbb{R}_+ , i.e. $\tau = \inf\{t \geq 0 \mid X_t \notin \mathbb{R}_+\}$ and define a set \mathcal{L}_1^r of functions f that satisfy the integrability condition $\mathbb{E}_x[\int_0^\tau e^{-rs}|f(X_s)|ds] < \infty$. Using this notation, we define the inverse of the differential operator $(r - \mathcal{A})$, called the resolvent R_r , by

$$(R_r f)(x) = \mathbb{E}_x \left[\int_0^\tau e^{-rs} f(X_s) ds \right]$$

for all $x \in \mathbb{R}_+$ and $f \in \mathcal{L}_1^r$. We also define the scale density of the diffusion by

$$S'(x) = \exp \left(- \int^x \frac{2\mu(z)}{\sigma^2(z)} dz \right),$$

which is the monotonic (and non-constant) solution to the differential equation $\mathcal{A}f = 0$.

Often in computations it is useful to use the formula

$$(3) \quad \begin{aligned} (R_r f)(x) = & B_r^{-1} \varphi_r(x) \int_0^x \psi_r(y) f(y) m'(y) dy \\ & + B_r^{-1} \psi_r(x) \int_x^\infty \varphi_r(y) f(y) m'(y) dy, \end{aligned}$$

which connects the resolvent and the fundamental solutions ψ_r and φ_r (see [8] p. 19). Here the positive constant, which does not depend on x ,

$$B_r = \frac{\psi_r'(x)}{S'(x)} \varphi_r(x) - \frac{\varphi_r'(x)}{S'(x)} \psi_r(x)$$

is the Wronskian of the fundamental solutions and

$$m'(x) = \frac{2}{\sigma^2(x) S'(x)}$$

denotes the density of the speed measure. We also recall the resolvent equation (see [8] p. 4)

$$(4) \quad R_q R_r = \frac{R_r - R_q}{q - r}.$$

3. THE CONTROL PROBLEMS

To pose the assumptions for the control problems, we define the function $\theta_r : \mathbb{R}_+ \rightarrow \mathbb{R}$ as $\theta_r(x) = \pi(x) + \gamma\rho(x)$, where γ is a positive constant and $\pi : \mathbb{R}_+ \rightarrow \mathbb{R}$ is the cost function. Here, the function $\rho : \mathbb{R}_+ \rightarrow \mathbb{R}$ is defined as $\rho(x) = \mu(x) - rx$, where r is a positive constant called the *discounting factor*. In economic literature, the function θ_r can be understood as the net convenience yield of holding inventories [3, 9]. This function appears in wide range of control problems of one-dimensional diffusions, when the criteria to be minimized includes discounting [15, 3, 17].

In addition, we note that in the absence of discounting, the function θ_r reduces to

$$\pi_\mu(x) = \pi(x) + \gamma\mu(x),$$

which is in key role in many ergodic control problems of one-dimensional diffusions [16, 6].

We study the control problems under the following assumptions.

Assumption 1. We assume that:

- (1) the upper boundary ∞ and the lower boundary 0 are natural,
- (2) the cost function π is continuous, non-negative and non-decreasing,
- (3) the functions θ_r and $\text{id}: x \mapsto x$ are in \mathcal{L}_1^r ,
- (4) there is a unique state $x^* \geq 0$ such that θ_r (and also π_μ) is decreasing on $(0, x^*)$ and increasing on (x^*, ∞) and that it satisfies the limiting condition $\lim_{x \rightarrow \infty} \theta_r(x) \geq 0$.

Assumption 2. We assume that

- (1) $m(0, y) = \int_0^y m'(z)dz < \infty$ and $\int_0^y \pi_\mu(z)m'(z)dz < \infty$ for all $y \in \mathbb{R}_+$,
- (2) $\lim_{x \downarrow 0} S'(x) = \infty$.

We make some remarks on these assumptions. First, we assume that the uncontrolled state variable X cannot become infinitely large or zero in finite time, see [8] pp. 18–20, for a characterization of the boundary behavior of diffusions. Second, the cost function is non-decreasing and non-negative which is in line with usual economic applications. Third, the resolvents $(R_r\theta_r)(x)$ and $(R_r \text{id})(x)$ exists. Fourth, we restrict our attention to the case, where the function θ_r (π_μ) has a unique global minimum at x^* . Finally, the first part in assumption 2 guarantees that the underlying diffusion has a stationary distribution (see [8] p. 37).

Lastly, we assume that

Assumption 3. The process N_t is a Poisson process with a parameter λ and it is independent of the underlying diffusion X_t . Furthermore, we assume that, the filtration $\{\mathcal{F}_t\}_{t \geq 0}$

is rich enough to carry the Poisson process $N = (N_t, \mathcal{F}_t)_{t \geq 0}$. We denote the jump times of N_t by T_i .

Before stating the control problems, we define the auxiliary functions $\pi_\gamma : \mathbb{R}_+ \rightarrow \mathbb{R}$ and $g : \mathbb{R}_+ \rightarrow \mathbb{R}$ as

$$\begin{aligned} g(x) &= \gamma x - (R_r \pi)(x), \\ \pi_\gamma(x) &= \lambda \gamma x + \pi(x), \end{aligned}$$

where γ, r are the same positive constants as in the definition of θ_r and λ is the intensity of the Poisson process in assumption 3. The next lemma gives useful relationships between these auxiliary functions, θ_r and π . The lemma can be proved using the resolvent equation (4) and the harmonicity property $(A - r)(R_r \pi)(x) + \pi(x) = 0$.

Lemma 1. Assume that $g, \pi_\gamma, \theta_r \in \mathcal{L}_1^r$. Then

$$\begin{aligned} (5) \quad & (\mathcal{A} - r)g(x) = \theta_r(x), \\ (6) \quad & (R_{r+\lambda} \pi_\gamma)(x) = \lambda(R_{r+\lambda} g)(x) + (R_r \pi)(x), \\ (7) \quad & \lambda(R_{r+\lambda} g)(x) = (R_{r+\lambda} \theta_r)(x) + g(x). \end{aligned}$$

The following functionals are in a key role in the main results of the study, as they offer convenient representations of the integral functionals that include ψ_r and φ_r :

$$\begin{aligned} L_\theta^r(x) &= r \int_x^\infty \varphi_r(y) \theta(y) m'(y) dy + \frac{\varphi_r'(x)}{S'(x)} \theta(x), \\ K_\theta^r(x) &= r \int_0^x \psi_r(y) \theta(y) m'(y) dy - \frac{\psi_r'(x)}{S'(x)} \theta(x), \\ H(x, y) &= \int_x^y (\pi_\mu(z) - \pi_\mu(x)) m'(z) dz. \end{aligned}$$

We now formulate downward singular control problems of one-dimensional diffusions and similar problems where controlling is allowed only at exogenously given Poisson arrival times. This latter problem is called *constrained* control problem.

We assume in all of the following theorems, that the controlled dynamics are given by the stochastic differential equation

$$X_t^D = \mu(X_t^D) dt + \sigma(X_t^D) dW_t - \gamma dD_t, \quad X_0^D = x \in \mathbb{R}_+,$$

where D_t denotes the applied control policy and γ is positive constant (the coefficient γ is often interpreted as proportional transaction cost).

Assumption 4 (Admissible control policies).

- (1) In the singular problems (theorems 1 and 2 below), we call a control policy D_t^s admissible, if it is non-negative, non-decreasing, right-continuous, and $\{\mathcal{F}_t\}_{t \geq 0}$ -adapted, and denote the set of admissible controls by \mathcal{D}_s .
- (2) In the constrained problems (theorems 3 and 4 below) the set of admissible controls \mathcal{D} is given by those non-decreasing, left-continuous processes D_t that have the representation

$$D_t = \int_{[0,t)} \eta_s dN_s,$$

where N is the signal process and the integrand η is $\{\mathcal{F}_t\}_{t \geq 0}$ -predictable.

We introduce the main results of the control problems below and refer to [1, 4, 6, 5, 15, 16] for full discussions.

Theorem 1 (Singular control with discounted criteria [1] pp.1701-1702, [4] pp.714-715). Under the assumption 1, the optimal control policy minimizing the objective

$$J_s(x, D^s) = \mathbb{E}_x \left[\int_0^\infty e^{-rt} (\pi(X_t^{D^s}) dt + \gamma dD_t^s) \right],$$

where $D_t^s \in \mathcal{D}_s$ is

$$D_t^s = \begin{cases} \mathcal{L}(t, y_s^*), & t > 0, \\ (x - y_s^*)^+, & t = 0, \end{cases}$$

where $\mathcal{L}(t, y_s^*)$ denotes the local time push of the process X_t at the boundary y_s^* . The boundary y_s^* is characterized by the unique solution to the equation

$$(8) \quad K_{\theta_r}^r(y_s^*) = 0.$$

Moreover, the value of the problem reads as

$$V_s(x) := \inf_{D^s \in \mathcal{D}^s} J_s(x, D^s) = \begin{cases} \gamma x + \frac{\theta_r(y_s^*)}{r}, & x \geq y_s^* \\ (R_r \pi)(x) - \psi_r(x) \frac{(R_r \pi)'(y_s^*) - \gamma}{\psi_r'(y_s^*)}, & x < y_s^*. \end{cases}$$

Theorem 2 (Singular control with ergodic criteria [6] pp.16-17, [5] p.7). Under the assumptions 1 and 2, the optimal control policy minimizing the objective

$$J_{se}(x, D^s) = \liminf_{T \rightarrow \infty} \frac{1}{T} \mathbb{E}_x \left[\int_0^T (\pi(X_t^{D^s}) dt + \gamma dD_t) \right]$$

where $D_t^s \in \mathcal{D}_s$ is

$$D_t^s = \begin{cases} \mathcal{L}(t, b_s^*), & t > 0, \\ (x - b_s^*)^+, & t = 0, \end{cases}$$

where $\mathcal{L}(t, b_s^*)$ denotes the local time push of the process X_t at the boundary b_s^* . The boundary b_s^* is characterized by the unique solution to the equation

$$(9) \quad H(0, b_s^*) = 0.$$

Moreover, the long run average cumulative yield reads as

$$\beta_s := \inf_{D \in \mathcal{D}_s} J_{se}(x, D) = \pi_\mu(b_s^*).$$

Theorem 3 (Control with discounted criteria and constraint [15] p.115). Under the assumption 1, the optimal control policy that minimizes the objective

$$J(x, D) = \mathbb{E}_x \left[\int_0^\infty e^{-rt} (\pi(X_t^D) dt + \gamma dD_t) \right],$$

where $D_t \in \mathcal{D}$, is as follows. If the controlled process X^D is above the threshold y^* at a jump time T_i of N , i.e. $X_{T_i-}^D > y^*$ for any i , the decision maker should take the controlled process X^D to y^* . Further, the threshold y^* is uniquely determined by

$$\psi_r'(y^*) L_g^{r+\lambda}(y^*) = g'(y^*) L_{\psi_r}^\lambda(y^*),$$

which can be rewritten as

$$(10) \quad \psi_r'(y^*) L_{\theta_r}^{r+\lambda}(y^*) = -\varphi_{r+\lambda}'(y^*) K_{\theta_r}^r(y^*).$$

In addition, the value function $V(x) := \inf_{D \in \mathcal{D}} J(x, D)$ of the problem reads as

$$(11) \quad V(x) = \begin{cases} \gamma x + (R_{r+\lambda} \theta_r)(x) - \frac{(R_{r+\lambda} \theta_r)'(y^*)}{\varphi_{r+\lambda}'(y^*)} \varphi_{r+\lambda}(x) + A(y^*), & x \geq y^* \\ \gamma x + (R_r \theta_r)(x) - \psi_r(x) \frac{(R_r \theta_r)'(y^*)}{\psi_r'(y^*)}, & x < y^* \end{cases}$$

where

$$A(y^*) = \frac{\lambda}{r} \left[(R_{r+\lambda} \theta_r)(y^*) - (R_{r+\lambda} \theta_r)'(y^*) \frac{\varphi_{r+\lambda}(y^*)}{\varphi_{r+\lambda}'(y^*)} \right].$$

Proof. We only prove that the optimality condition can be rewritten as (10), and refer to [15] for the rest of the claim. To prove the representation, we first use the lemma 2, and

then the formulas (5) and (7), to get

$$\begin{aligned}
& \frac{2\lambda S'(y^*)}{\sigma^2(y^*)} \left[\psi'_r(y^*) L_g(y^*) - g'(y^*) L_{\psi_r}(y^*) \right] \\
&= \psi'_r(y^*) (\varphi''_{r+\lambda}(y^*) \lambda (R_{r+\lambda} g)'(y^*) - \varphi'_{r+\lambda}(y^*) \lambda (R_{r+\lambda} g)''(y^*)) \\
&\quad - g'(y^*) (\varphi''_{r+\lambda}(y^*) \psi'_r(y^*) - \varphi'_{r+\lambda}(y^*) \psi''_r(y^*)) \\
&= \psi'_r(y^*) (\varphi''_{r+\lambda}(y^*) (R_{r+\lambda} \theta_r)'(y^*) - \varphi'_{r+\lambda}(y^*) (R_{r+\lambda} \theta_r)''(y^*)) \\
&\quad - \varphi'_{r+\lambda}(y^*) (\psi''_r(y^*) (R_r \theta_r)'(y^*) - \psi'_r(y^*) (R_r \theta_r)''(y^*)).
\end{aligned}$$

Utilizing the lemma 2 again, we see that the optimality condition has the form

$$\psi'_r(y^*) L_{\theta_r}^{r+\lambda}(y^*) = -\varphi'_{r+\lambda}(y^*) K_{\theta_r}^r(y^*).$$

□

Theorem 4 (Control with ergodic criteria and constraint [16] p.16). Under the assumptions 1, 2 and that $\pi(x) \geq C(x^\alpha - 1)$, where α and C are positive constants, the optimal control policy minimizing the objective

$$J_e(x, D) = \liminf_{T \rightarrow \infty} \frac{1}{T} \mathbb{E}_x \left[\int_0^T (\pi(X_t^D) dt + \gamma dD_t) \right],$$

where $D_t \in \mathcal{D}$, is as follows. If the controlled process X^D is above the threshold b^* at a jump time T_i of N , i.e. $X_{T_i-}^D > b^*$ for any i , the decision maker should take the controlled process X^D to b^* . Further, the threshold b^* is uniquely determined by

$$(12) \quad S'(b^*) m(0, b^*) L_{\pi_\mu}^\lambda(b^*) = -\varphi'_\lambda(b^*) H(0, b^*),$$

and the long run average cumulative yield β reads as

$$\beta := \inf_{D \in \mathcal{D}} J_e(x, D) = m(0, b^*)^{-1} \left[\int_0^{b^*} \pi_\mu(z) m'(z) dz \right].$$

Remark 1. The boundary classifications for the underlying diffusion can be relaxed in all of the above theorems. For example, in theorem 3 it can be shown that the results stays unchanged when the lower boundary is exit or killing, see [15] p. 5.

The optimal policies in the above theorems can be summarised as follows. In the singular control problems the optimal policies are local time type barrier policies. In other words, when the process is below some constant boundary y_s^* the process should be left uncontrolled, but it should never be allowed to cross it, i.e. it is reflected at y_s^* . The situation in the problems with constraint is similar: when the process is below some threshold y^*

we do not act, but if the process crosses the boundary, and the Poisson process jumps, we immediately push it down to y^* and start it anew. In other words, the optimal strategy in all of the problems is to exert control at the ‘maximum rate’ when the process is at (or above) the corresponding boundary.

4. MAIN RESULTS

In the next lemma, we collect useful representations for functionals K_r^f and L_f^r .

Lemma 2. The functions L_f and K_f have alternative representations

$$\begin{aligned} L_f^r(x) &= \frac{\sigma^2(x)}{2S'(x)} [\varphi_r''(x)(R_r f)'(x) - \varphi_r'(x)(R_r f)''(x)], \\ K_f^r(x) &= \frac{\sigma^2(x)}{2S'(x)} [\psi_r'(x)(R_r f)''(x) - \psi_r''(x)(R_r f)'(x)]. \end{aligned}$$

Proof. The proof for the claim on L_f is in [15] lemma 2 and the proof on K_f is completely analogous. \square

Under our assumption that the boundaries are natural, we have that

$$(13) \quad \frac{\varphi_r'(x)}{S'(x)} = -r \int_x^\infty \varphi_r(y) m'(y) dy, \quad \frac{\psi_r'(x)}{S'(x)} = r \int_0^x \psi_r(y) m'(y) dy,$$

and thus, we can further rewrite

$$\begin{aligned} L_f^r(x) &= r \int_x^\infty \varphi_r(y) (f(y) - f(x)) m'(y) dy, \\ K_f^r(x) &= r \int_0^x \psi_r(y) (f(y) - f(x)) m'(y) dy. \end{aligned}$$

In the next proposition we prove that the just introduced functionals, often appearing in bounded variation control problems of one-dimensional diffusion processes, satisfy asymptotic properties that are needed to establish the relationships between different control problems.

Proposition 1. Under the assumption 1, we have the following limiting properties

$$\frac{L_{\theta_r}^{r+\lambda}(x)}{(r+\lambda)\varphi_{r+\lambda}(x)} \xrightarrow{\lambda \rightarrow \infty} 0, \quad \frac{K_{\theta_r}^{r+\lambda}(x)}{(r+\lambda)\psi_{r+\lambda}(x)} \xrightarrow{\lambda \rightarrow \infty} 0.$$

In addition, if the underlying diffusion X_t is recurrent, i.e. $\mathbb{P}_x[\tau_z < \infty] = 1$ for all $x, z \in \mathbb{R}_+$, then

$$\frac{L_{\theta_r}^r(x)}{r\varphi_r(x)} \xrightarrow{r \rightarrow 0} H(x, \infty), \quad \frac{K_{\theta_r}^r(x)}{r\psi_r(x)} \xrightarrow{r \rightarrow 0} H(0, x),$$

where

$$H(x, y) = \int_x^y (\pi_\mu(z) - \pi_\mu(x))m'(z)dz.$$

Proof. Let $\tau_z = \inf\{t \geq 0 \mid X_t = z\}$. Then for all $s > 0$ we have

$$(14) \quad \mathbb{E}_x[e^{-s\tau_z} \mid \tau_z < \infty] = \begin{cases} \frac{\psi_s(x)}{\psi_s(z)}, & x \leq z \\ \frac{\varphi_s(x)}{\varphi_s(z)}, & x > z. \end{cases}$$

Therefore, by letting $s \rightarrow 0+$ we get by monotone convergence that

$$(15) \quad \begin{aligned} \lim_{s \rightarrow 0+} \frac{\psi_s(x)}{\psi_s(z)} &= \mathbb{P}_x[\tau_z < \infty] = 1, \\ \lim_{s \rightarrow 0+} \frac{\varphi_s(x)}{\varphi_s(z)} &= \mathbb{P}_x[\tau_z < \infty] = 1, \end{aligned}$$

under the assumption that the underlying diffusion is recurrent. In addition, again by (14), we find that

$$(16) \quad \lim_{s \rightarrow \infty} \frac{\psi_s(x)}{\psi_s(z)} = 0, \quad \lim_{s \rightarrow \infty} \frac{\varphi_s(x)}{\varphi_s(z)} = 0.$$

Since $\lim_{r \rightarrow 0+} \theta_r(x) = \pi_\mu(x)$, we see by using the above observations that by monotone convergence

$$\begin{aligned} \frac{L_{\theta_r}^r(x)}{r\varphi_r(x)} &= \int_x^\infty \frac{\varphi_r(z)}{\varphi_r(x)} (\theta_r(z) - \theta_r(x))m'(z)dz \rightarrow H(x, \infty) \text{ as } r \rightarrow 0, \\ \frac{K_{\theta_r}^r(x)}{r\psi_r(x)} &= \int_0^x \frac{\psi_r(z)}{\psi_r(x)} (\theta_r(z) - \theta_r(x))m'(z)dz \rightarrow H(0, x) \text{ as } r \rightarrow 0. \end{aligned}$$

Similarly, by utilizing (16) we obtain

$$\begin{aligned} \frac{L_{\theta_r}^{r+\lambda}(x)}{(r+\lambda)\varphi_{r+\lambda}(x)} &= \int_x^\infty \frac{\varphi_{r+\lambda}(z)}{\varphi_{r+\lambda}(x)} (\theta_r(z) - \theta_r(x))m'(z)dz \rightarrow 0 \text{ as } \lambda \rightarrow \infty, \\ \frac{K_{\theta_r}^{r+\lambda}(x)}{(r+\lambda)\psi_{r+\lambda}(x)} &= \int_0^x \frac{\psi_{r+\lambda}(z)}{\psi_{r+\lambda}(x)} (\theta_r(z) - \theta_r(x))m'(z)dz \rightarrow 0 \text{ as } \lambda \rightarrow \infty. \end{aligned}$$

□

Proposition 2 (Asymptotics of the optimal thresholds). Under the assumptions of proposition 1 the optimal thresholds satisfy the following asymptotic results in terms of the intensity of the Poisson process

$$y^* \xrightarrow{\lambda \rightarrow \infty} y_s^*, \quad b^* \xrightarrow{\lambda \rightarrow \infty} b_s^*,$$

and if the underlying diffusion is also recurrent, we have the vanishing discount factor limits

$$y_s^* \xrightarrow{r \rightarrow 0} b_s^*, \quad y^* \xrightarrow{r \rightarrow 0} b^*.$$

Proof. We prove the first and the last claim, as the proof of the second claim can be found in [16], proposition 3, and the proof of the third claim in [5], lemma 3.1. Define the functions

$$\begin{aligned} G(x) &= \psi'_r(x)L_{\theta_r}^{r+\lambda}(x) + \varphi'_{r+\lambda}(x)K_{\theta_r}^r(x), \\ F(x) &= S'(x)m(0, x)L_{\pi_\mu}^\lambda(x) + \varphi'_\lambda(x)H(0, x), \end{aligned}$$

and let y_s^* , y^* , b^* be such that $K(y_s^*) = 0$, $G(y^*) = 0$ and $F(b^*) = 0$. Using these notations, the first claim can be re-expressed as

$$\frac{G(y_s^*)}{\varphi_{r+\lambda}(y_s^*)} \rightarrow 0 \text{ as } \lambda \rightarrow \infty.$$

Now, utilizing the condition $K(y_s^*) = 0$, together with the lemma 1, we have that

$$\frac{L_{\theta_r}^{r+\lambda}(y_s^*)}{\varphi_{r+\lambda}(y_s^*)} \rightarrow 0 \text{ as } \lambda \rightarrow \infty.$$

To prove the last claim, we first note, as above, that the claim is equivalent to

$$\frac{G(b^*)}{\psi'_r(b^*)} \rightarrow 0 \text{ as } r \rightarrow 0.$$

Hence, utilizing (13), we get that

$$\begin{aligned} \frac{G(b^*)}{\psi'_r(y_s^*)} &= \lambda \int_{b^*}^{\infty} \varphi_{r+\lambda}(z)\theta_r(z)m'(z)dz \\ &+ \frac{\varphi'_{r+\lambda}(b^*)}{S'(b^*)} \frac{\int_0^{b^*} \psi_r(z)\theta_r(z)m'(z)dz}{\int_0^{b^*} \psi_r(z)m'(z)dz}. \end{aligned}$$

By lemma 1 we have that

$$\begin{aligned} \frac{\int_0^{b^*} \psi_r(z)\theta_r(z)m'(z)dz}{\int_0^{b^*} \psi_r(z)m'(z)dz} &= \frac{K_{\theta_r}^r(b^*) + \theta_r(b^*) \int_0^{b^*} \psi_r(z)m'(z)dz}{\int_0^{b^*} \psi_r(z)m'(z)dz} \\ &= \frac{\frac{K_{\theta_r}^r(b^*)}{\psi_r(b^*)}}{\int_0^{b^*} \frac{\psi_r(z)}{\psi_r(b^*)}m'(z)dz} + \theta_r(b^*) \\ &\xrightarrow{r \rightarrow 0} \frac{H(0, b^*)}{m(0, b^*)} + \pi_\mu(b^*). \end{aligned}$$

Thus, the claim follows from the assumption $F(b^*) = 0$. \square

Similar limiting results hold also for the corresponding values of the defined control problems. However, it is clear that in terms of the vanishing discounting factor, the results hold only in the following Abelian sense.

Proposition 3 (Asymptotics of the values). Under the assumptions of proposition 1 the values of the control problems satisfy the following asymptotic results

$$V(x) \xrightarrow{\lambda \rightarrow \infty} V_s(x), \quad \beta \xrightarrow{\lambda \rightarrow \infty} \beta_s.$$

Also, if the underlying diffusion is recurrent, we have the following Abelian limits

$$rV(x) \xrightarrow{r \rightarrow 0} \beta, \quad rV_s(x) \xrightarrow{r \rightarrow 0} \beta_s.$$

Proof. For the last claim see lemma 3.1 of [5]. To prove the third, we first re-write the value function (11) using lemma 1 as

$$(17) \quad V(x) = \begin{cases} \gamma x + (R_{r+\lambda}\theta_r)(x) - \frac{(R_{r+\lambda}\theta_r)'(y^*)}{\varphi'_{r+\lambda}(y^*)} \varphi_{r+\lambda}(x) + A(y^*), & x \geq y^*, \\ \gamma x + \psi_r(x) \left[\frac{(R_r\theta_r)(x)}{\psi_r(x)} - \frac{(R_r\theta_r)'(y^*)}{\psi_r'(y^*)} \right], & x < y^*, \end{cases}$$

where

$$A(y^*) = \frac{\lambda}{r} \left[(R_{r+\lambda}\theta_r)(y^*) - (R_{r+\lambda}\theta_r)'(y^*) \frac{\varphi_{r+\lambda}(y^*)}{\varphi'_{r+\lambda}(y^*)} \right].$$

We notice that when $x > y^*$, the value function $rV(x)$ has convenient presentation in terms of the limit $r \rightarrow 0$. However, when $x < y^*$ we have to proceed as follows. Because $V(x)$ is continuous across the boundary y^* , we find

$$(18) \quad \begin{aligned} & (r + \lambda)\psi_r'(y^*)(\varphi'_{r+\lambda}(y^*)(R_{r+\lambda}\theta_r)(y^*) - \varphi_{r+\lambda}(y^*)(R_{r+\lambda}\theta_r)'(y^*)) \\ & = r\varphi'_{r+\lambda}(y^*)(\psi_r'(y^*)(R_r\theta_r)(y^*) - \psi_r(y^*)(R_r\theta_r)'(y^*)), \end{aligned}$$

which can be re-organized as

$$(19) \quad \begin{aligned} & -r \frac{(R_r\theta_r)'(y^*)}{\psi_r'(y^*)} + r \frac{(R_r\theta_r)(y^*)}{\psi_r(y^*)} \\ & = (r + \lambda) \left(\frac{\varphi'_{r+\lambda}(y^*)(R_{r+\lambda}\theta_r)(y^*) - \varphi_{r+\lambda}(y^*)(R_{r+\lambda}\theta_r)'(y^*)}{\varphi'_{r+\lambda}(y^*)\psi_r(y^*)} \right). \end{aligned}$$

Thus, we get that

$$\begin{aligned} & r\gamma x + r\psi_r(x) \left[\frac{(R_r\theta_r)(x)}{\psi_r(x)} - \frac{(R_r\theta_r)'(y^*)}{\psi_r'(y^*)} \right] \\ &= r\gamma x + r(R_r\theta_r)(x) - r\frac{\psi_r(x)}{\psi_r(y^*)}(R_r\theta_r)(y^*) \\ &+ (r + \lambda)\frac{\psi_r(x)}{\psi_r(y^*)} \left(\frac{\varphi'_{r+\lambda}(y^*)(R_{r+\lambda}\theta_r)(y^*) - \varphi_{r+\lambda}(y^*)(R_{r+\lambda}\theta_r)'(y^*)}{\varphi'_{r+\lambda}(y^*)} \right). \end{aligned}$$

Using the formula (3) and (15), we see that

$$\begin{aligned} r(R_r\theta_r)(x) &= r\frac{\varphi_r(x) \int_0^x \psi_r(z)\theta_r(z)m'(z)dz + \psi_r(x) \int_x^\infty \varphi_r(z)\theta_r(z)m'(z)dz}{S'(x)[\psi_r'(x)\varphi_r(x) - \psi_r(x)\varphi_r'(x)]} \\ &= \frac{\varphi_r(x) \int_0^x \psi_r(z)\theta_r(z)m'(z)dz + \psi_r(x) \int_x^\infty \varphi_r(z)\theta_r(z)m'(z)dz}{\varphi_r(x) \int_0^x \psi_r(z)m'(z)dz + \psi_r(x) \int_x^\infty \varphi_r(z)m'(z)dz} \\ &= \frac{\int_0^x \frac{\psi_r(z)}{\psi_r(x)}\theta_r(z)m'(z)dz + \int_x^\infty \frac{\varphi_r(z)}{\varphi_r(x)}\theta_r(z)m'(z)dz}{\int_0^x \frac{\psi_r(z)}{\psi_r(x)}m'(z)dz + \int_x^\infty \frac{\varphi_r(z)}{\varphi_r(x)}m'(z)dz} \\ &\xrightarrow{r \rightarrow 0} \frac{\int_0^\infty \pi_\mu(z)m'(z)dz}{\int_0^\infty m'(z)dz}, \end{aligned}$$

and thus, by (15) we have

$$r(R_r\theta_r)(x) - r\frac{\psi_r(x)}{\psi_r(y^*)}(R_r\theta_r)(y^*) \xrightarrow{r \rightarrow 0} 0.$$

Therefore, by continuity and (2), the value function satisfies

$$rV(x) \xrightarrow{r \rightarrow 0} \begin{cases} \lambda \frac{\varphi'_\lambda(b^*)(R_\lambda\pi_\mu)(b^*) - \varphi_\lambda(b^*)(R_\lambda\pi_\mu)'(b^*)}{\varphi'_\lambda(b^*)}, & x \geq b^* \\ \lambda \frac{\varphi'_\lambda(b^*)(R_\lambda\pi_\mu)(b^*) - \varphi_\lambda(b^*)(R_\lambda\pi_\mu)'(b^*)}{\varphi'_\lambda(b^*)}, & x < b^*. \end{cases}$$

Finally, utilizing (3), the limiting value reads as

$$-\frac{\lambda S'(b^*)}{\varphi'_\lambda(b^*)} \int_{b^*}^\infty \pi_\mu(z)\varphi_\lambda(z)m'(z)dz,$$

which completes the proof of the third claim.

To prove the second claim, we notice that the value function $V(x)$ is independent of λ when $x < y^*$. Thus, we focus this time on the region $x > y^*$. We re-organize the terms $V(x)$ in the upper region as

$$(20) \quad \gamma x + (R_{r+\lambda}\theta_r)(x) - \frac{(R_{r+\lambda}\theta_r)'(y^*)}{\varphi'_{r+\lambda}(y^*)}\varphi_{r+\lambda}(x) + A(y^*)$$

where

$$A(y^*) = \frac{\lambda}{r} \left[(R_{r+\lambda}\theta_r)(y^*) - (R_{r+\lambda}\theta_r)'(y^*) \frac{\varphi_{r+\lambda}(y^*)}{\varphi'_{r+\lambda}(y^*)} \right].$$

Because diffusions are Feller-processes, we know that $\lambda(R_{r+\lambda}\theta_r) \rightarrow \theta_r$ as $\lambda \rightarrow \infty$ (in sup-norm), see [21] pp. 235. Thus,

$$\gamma x + \frac{\lambda(R_{r+\lambda}\theta_r)(x)}{\lambda} + \frac{\lambda(R_{r+\lambda}\theta_r)(y^*)}{r} \xrightarrow{\lambda \rightarrow \infty} \gamma x + \frac{\theta_r(y_s^*)}{r}.$$

To deal with the remaining terms in (17), we note that by (18)

$$\begin{aligned} \frac{(R_{r+\lambda}\theta_r)'(y^*)}{\varphi'_{r+\lambda}(y^*)} &= \frac{(R_{r+\lambda}\theta_r)(y^*)}{\varphi_{r+\lambda}(y^*)} - \frac{r}{r+\lambda} \frac{(R_r\theta_r)(y^*)}{\varphi_{r+\lambda}(y^*)} \\ &\quad + \frac{r}{r+\lambda} \frac{\psi_r(y^*)}{\psi'_r(y^*)} \frac{(R_r\theta_r)'(y^*)}{\varphi_{r+\lambda}(y^*)}. \end{aligned}$$

Utilizing the above we get by (15)

$$\begin{aligned} &\frac{(R_{r+\lambda}\theta_r)'(y^*)}{\varphi'_{r+\lambda}(y^*)} \varphi_{r+\lambda}(x) \\ &= \frac{\varphi_{r+\lambda}(x)}{\varphi_{r+\lambda}(y^*)} (R_{r+\lambda}\theta_r)(y^*) - \frac{r}{r+\lambda} \frac{\varphi_{r+\lambda}(x)}{\varphi_{r+\lambda}(y^*)} (R_r\theta_r)(y^*) \\ &\quad + \frac{r}{r+\lambda} \frac{\psi_r(y^*)}{\psi'_r(y^*)} \frac{\varphi_{r+\lambda}(x)}{\varphi_{r+\lambda}(y^*)} (R_r\theta_r)'(y^*) \\ &\xrightarrow{\lambda \rightarrow \infty} 0 \end{aligned}$$

and

$$\begin{aligned} &\frac{\lambda}{r} \frac{(R_{r+\lambda}\theta_r)'(y^*)}{\varphi'_{r+\lambda}(y^*)} \varphi_{r+\lambda}(y^*) \\ &= \frac{\lambda}{r} (R_{r+\lambda}\theta_r)(y^*) - \frac{\lambda}{r+\lambda} (R_r\theta_r)(y^*) + \frac{\lambda}{r+\lambda} \frac{\psi_r(y^*)}{\psi'_r(y^*)} (R_r\theta_r)'(y^*) \\ &\xrightarrow{\lambda \rightarrow \infty} \frac{\theta_r(y_s^*)}{r} - (R_r\theta_r)(y_s^*) + \frac{\psi_r(y_s^*)}{\psi'_r(y_s^*)} (R_r\theta_r)'(y_s^*). \end{aligned}$$

As the value function $V_s(x)$ is continuous over the boundary y_s^* , we further find that

$$\frac{\theta_r(y_s^*)}{r} - (R_r\theta_r)(y_s^*) + \frac{\psi_r(y_s^*)}{\psi'_r(y_s^*)} (R_r\theta_r)'(y_s^*) = 0.$$

Combining the above limits the result follows by continuity and proposition 2.

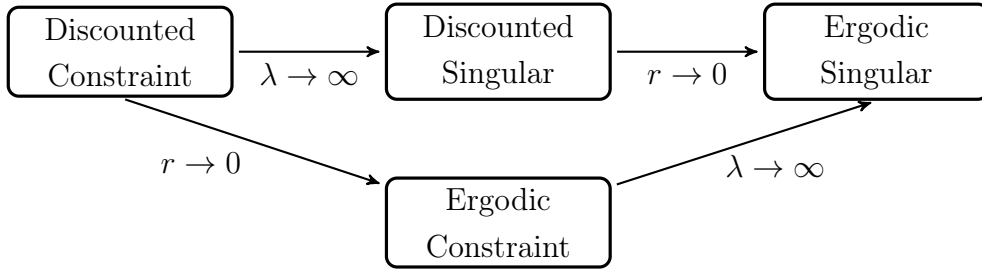


FIGURE 1. Relations between the control problems. These relations hold for the optimal thresholds and also for the values, in the sense of propositions 1 and 2.

Lastly, the second claim of the proposition follows by continuity of the functions and proposition 2, as β_s can also be represented as (see [6] pp. 17)

$$\beta_s = m(0, b_s^*)^{-1} \left[\int_0^{b_s^*} \pi_\mu(z) m'(z) dz \right].$$

□

5. ILLUSTRATION

5.1. **Brownian motion with drift.** Let the underlying process X_t be defined by

$$(21) \quad dX_t = \mu dt + dW_t, \quad X_0 = x,$$

where $\mu > 0$. Also, we let the process evolve in \mathbb{R} and choose a quadratic running cost $\pi(x) = x^2$. The minimal excessive functions are in this case known to be

$$\varphi_\lambda(x) = e^{-\left(\sqrt{\mu^2+2\lambda+\mu}\right)x}, \quad \psi_\lambda(x) = e^{\left(\sqrt{\mu^2+2\lambda-\mu}\right)x},$$

and the scale density and speed measure read as

$$S'(x) = \exp(-2\mu x), \quad m'(x) = 2 \exp(2\mu x),$$

respectively. The net convenience yield now takes the form $\theta(x) = x^2 + \gamma(\mu - rx)$. We notice immediately that our assumptions 1 and 3 hold and so the results apply in the case of the discounted problems (theorems 1 and 3).

To illustrate the results of proposition 2, we solve the optimality conditions (8) and (10). Conveniently the solution to these equations can be represented explicitly. To solve the

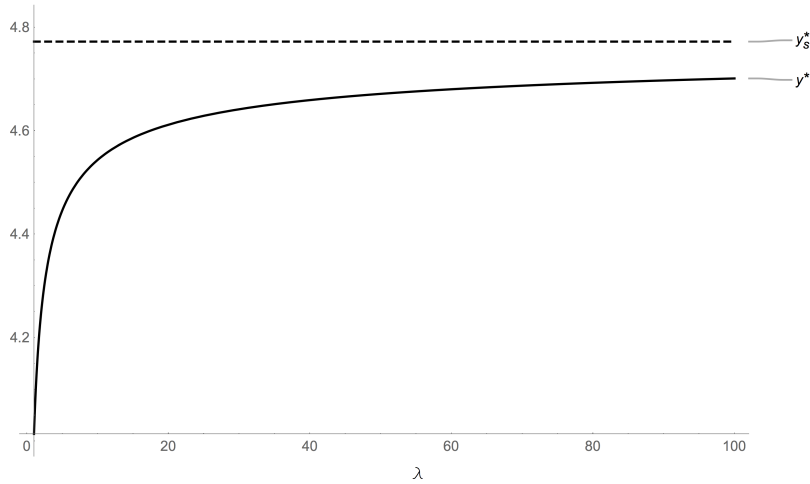


FIGURE 2. Threshold boundaries as a function of the intensity of the Poisson process with the parameters $\gamma = 0.001$, $\mu = 0.1$ and $r = 0.001$.

equations we need to find the functions $K_{\theta_r}^r(x)$ and $L_{\theta_r}^{r+\lambda}(x)$. Elementary integration yields

$$K_{\theta_r}^r(x) = \frac{2e^{x\alpha_r^+} (2 + (-2x + r\gamma)\alpha_r^+)}{(\alpha_r^+)^3},$$

$$L_{\theta_r}^{r+\lambda}(x) = \frac{2e^{x\alpha_r^-} (2 + (2x - r\gamma)\alpha_r^-)}{(\alpha_r^-)^3},$$

where $\alpha_r^+ = \mu + \sqrt{2r + \mu^2}$ and $\alpha_r^- = \mu - \sqrt{2r + \mu^2}$. Plugging these representations to the equations (8) and (10), a simplification yields as solutions the thresholds

$$y_s^* = \frac{r\gamma}{2} + \frac{1}{\alpha_r^+}, \quad y^* = \frac{r\gamma}{2} + \frac{1}{\alpha_r^+} + \frac{1}{\alpha_{r+\lambda}^-}.$$

Using these explicit representation, we get a limit as in proposition 2. These thresholds are illustrated in the figure 2.

5.2. Controlled Ornstein-Uhlenbeck process. Consider dynamics that are characterized by a stochastic differential equation

$$dX_t = -\beta X_t dt + dW_t, \quad X_0 = x,$$

where $\beta > 0$. This diffusion is often used to model continuous time systems that have mean reverting behaviour. To illustrate the results we choose the running cost $\pi(x) = |x|$, and consequently $\theta(x) = |x| - \gamma(\beta + r)x$. The scale density and the density of speed measure are in this case

$$S'(x) = \exp(\beta x^2), \quad m'(x) = 2 \exp(-\beta x^2),$$

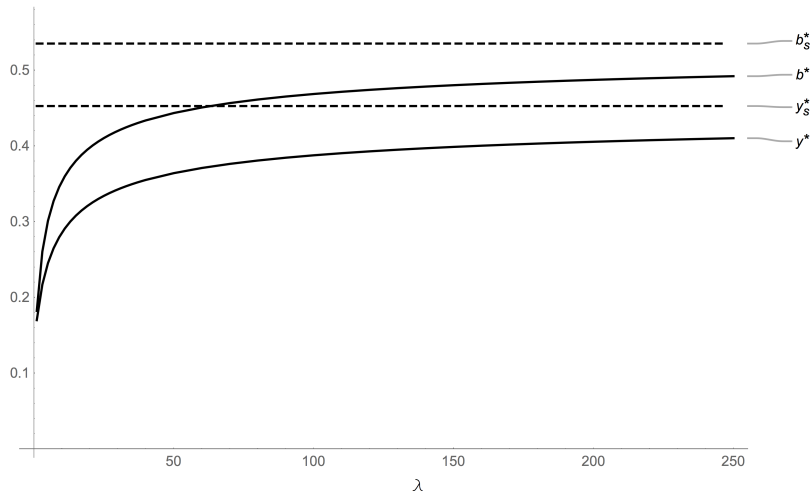


FIGURE 3. Threshold boundaries as a function of the intensity of the Poisson process with the parameters $\gamma = 0.1$, $\beta = 1$ and $r = 1$.

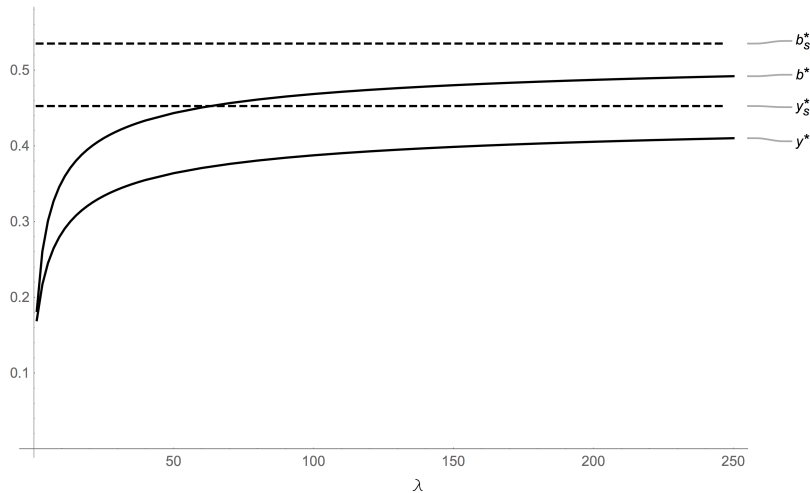


FIGURE 4. Threshold boundaries as a function of the discounting with the parameters $\gamma = 0.1$, $\beta = 1$ and $\lambda = 20$.

and the minimal r -excessive functions read as (see [8] p. 141)

$$\varphi_\lambda(x) = e^{\frac{\beta x^2}{2}} D_{-\lambda/\beta}(x\sqrt{2\beta}), \quad \psi_\lambda(x) = e^{\frac{\beta x^2}{2}} D_{-\lambda/\beta}(-x\sqrt{2\beta}),$$

where $D_\nu(x)$ is a parabolic cylinder function. We note that our assumptions 1 and 2 are satisfied and that this process is positively recurrent (see [8] p.141). Unfortunately, the equations for the optimal thresholds take rather complicated forms, and thus the results in proposition (2) are only illustrated numerically.

Acknowledgements. We would like to gratefully acknowledge the emmy.network foundation under the aegis of the Fondation de Luxembourg, for its continued support.

REFERENCES

- [1] Alvarez, L. H. R., Singular Stochastic Control, Linear Diffusions, and Optimal Stopping: A Class of Solvable Problems, *SIAM J. Control Optim.*, Volume 39, pp. 1697-1710, 2001.
- [2] Alvarez, L. H. R., On the Properties of r -Excessive Mappings for a Class of Diffusions, *Ann. Appl. Probab.*, Volume 13, pp. 1517-1533, 2003.
- [3] Alvarez, L. H. R., A Class of Solvable Impulse Control Problems, *Appl. Math. Optimization*, Volume 49, pp. 265-295, 2004.
- [4] Alvarez, L. H. R. and Lempa J., On The Optimal Stochastic Impulse Control of Linear Diffusions, *SIAM J. Control Optim.*, Volume 47, pp. 703-732, 2008.
- [5] Alvarez, L. H. R., and Hening, A., Optimal Sustainable Harvesting of Populations in Random Environments, e-print *ArXiv:1807.02464*, 2018.
- [6] Alvarez, L. H. R., A Class of Solvable Stationary Singular Stochastic Control Problems, e-print *ArXiv:1803.03464*, 2018.
- [7] Arapostathis, A., Borkar, V. S. and Ghosh, M. K., *Ergodic Control of Diffusion Processes*. Cambridge University Press, New York, 2012.
- [8] Borodin, A. N. and Salminen, P. *Handbook of Brownian Motion - Facts and Formulae, 2nd edition*. Birkhäuser, Basel.
- [9] Dixit, A. K. and Pindyck, R.S., *Investment Under Uncertainty*, Princeton Univ. Press, 1994.
- [10] Dupuis, P. and Wang, H., Optimal Stopping with Random Intervention Times, *Adv. Appl. Prob.*, Volume 34, pp. 141-157, 2002.
- [11] Gatarek, D. and Stettner, L., On the compactness method in general ergodic impulsive control of Markov processes, *Stoch. Stoch. Rep.*, Volume 31, pp. 15–25, 1990.
- [12] Guo, X. and Liu, J., Stopping at the maximum of geometric Brownian motion when signals are received. *J. Appl. Probab.*, Volume 42, pp. 826–838, 2005.
- [13] Karatzas, I., Shreve, S. E., *Brownian Motion and Stochastic Calculus*, Springer, New York, 1991.
- [14] Lempa, J., Optimal Stopping with Information Constraint, *Appl. Math. Optimization*, Volume 66, pp. 147-173, 2012.
- [15] Lempa, J., Bounded Variation Control of Itô Diffusion with Exogenously Restricted Intervention Times, *Adv. Appl. Prob.*, Volume 46, pp. 102-120, 2014.
- [16] Lempa, J., and Saarinen, H., Ergodic Control of Diffusions with Random Intervention Times, e-print *ArXiv:1909.05047*, 2019.
- [17] Matomäki P., On Solvability of a Two-sided Singular control Problem, *Math. Math. Oper. Res.*, Volume 76, pp. 239-271, 2012.
- [18] Menaldi, J. L. and Robin, M., On Some Impulse Control Problems with Constraint, *SIAM J. Control Optim.*, Volume 55, pp. 3204-3225, 2017.
- [19] Menaldi, J. L. and Robin M., On Some Ergodic Impulse Control Problems with Constraint, *SIAM J. Control Optim.*, Volume 56, pp. 2690-2711, 2018.

- [20] Robin, M., Long-Term Average Cost Control Problems for Continuous time Markov Processes: A Survey, *Acta Applicande Mathematicae*, Volume 1, pp. 281-299, 1983.
- [21] Rogers, L.C.G., Williams, D.: Diffusions, Markov Processes and Martingales, vol. 1. Cambridge University Press, Cambridge, 2001.
- [22] Sethi, S., Zhang, H. and Zhang, Q., *Average-Cost Control of Stochastic Manufacturing Systems*, Springer-Verlag, New York, 2005.
- [23] Wang, H., Some Control Problems with Random Intervention Times, *Adv. Appl. Prob.*, Volume 33, pp. 404-422, 2001.

JUKKA LEMPA, DEPARTMENT OF MATHEMATICS AND STATISTICS, UNIVERSITY OF TURKU, FI - 20014 TURUN YLIOPISTO, FINLAND, [JUMILE@UTU.FI](mailto:jumile@utu.fi)

HARTO SAARINEN, DEPARTMENT OF MATHEMATICS AND STATISTICS, UNIVERSITY OF TURKU, FI - 20014 TURUN YLIOPISTO, FINLAND, [HOASAA@UTU.FI](mailto:hoasaa@utu.fi)