

Magnetization of rotating ferrofluids: predictions of different theoretical models

A. Leschhorn and M. Lücke
Institut für Theoretische Physik,
Universität des Saarlandes,
D-66041 Saarbrücken, Germany

(Dated: November 20, 2018)

Abstract

We consider a ferrofluid cylinder, that is rotating with constant rotation frequency $\boldsymbol{\Omega} = \Omega \mathbf{e}_z$ as a rigid body. A homogeneous magnetic field $\mathbf{H}_0 = H_0 \mathbf{e}_x$ is applied perpendicular to the cylinder axis \mathbf{e}_z . This causes a nonequilibrium situation. Therein the magnetization \mathbf{M} and the internal magnetic field \mathbf{H} are constant in time and homogeneous within the ferrofluid. According to the Maxwell equations they are related to each other via $\mathbf{H} = \mathbf{H}_0 - \mathbf{M}/2$. However, \mathbf{H} and \mathbf{M} are not parallel to each other and their directions differ from that of the applied field \mathbf{H}_0 . We have analyzed several different theoretical models that provide equations for the magnetization in such a situation. The magnetization \mathbf{M} is determined for each model as a function of Ω and H_0 in a wide range of frequencies and fields. Comparisons are made of the different model results and the differences in particular of the predictions for the perpendicular components $H_y = -M_y/2$ of the fields are analyzed.

I. INTRODUCTION

There are several theoretical equations for the dynamics of the magnetization $\mathbf{M}(\mathbf{r}, t)$ of a ferrofluid that is flowing with velocity $\mathbf{u}(\mathbf{r}, t)$ in an externally applied magnetic field \mathbf{H}_0 [1, 2, 3, 4, 5]. Here we compare their predictions for a simple special case that is experimentally accessible. We consider a ferrofluid cylinder of radius R of sufficiently large length to be approximated as infinite in a homogeneous applied field $\mathbf{H}_0 = H_0 \mathbf{e}_x$ in x -direction. The ferrofluid cylinder is enforced via its walls to rotate as a rigid-body around its long axis with constant rotation frequency $\boldsymbol{\Omega} = \Omega \mathbf{e}_z$ being oriented perpendicular to \mathbf{H}_0 . The flowfield is thus $\mathbf{u}(\mathbf{r}) = \boldsymbol{\Omega} \times \mathbf{r} = \Omega r \mathbf{e}_\varphi$ where \mathbf{e}_φ is the unit vector in azimuthal direction. In such a situation all aforementioned models allow for a spatially and temporally constant nonequilibrium magnetization \mathbf{M} that is rotated out of the directions of \mathbf{H}_0 and \mathbf{H} by the flow. The Maxwell equations demand that the fields \mathbf{H} and \mathbf{M} within the ferrofluid are related to each other via

$$\mathbf{H} = \mathbf{H}_0 - \frac{1}{2} \mathbf{M} \quad (1.1)$$

as indicated schematically in Fig. 1 and that the magnetic field outside the ferrofluid cylinder

$$\mathbf{H}^{out} = \mathbf{H}_0 + \frac{1}{2} \frac{R^2}{r^2} \left(2 \frac{\mathbf{r} \mathbf{M} \cdot \mathbf{r}}{r} - \mathbf{M} \right) \quad (1.2)$$

is a superposition of the applied field \mathbf{H}_0 and the dipolar contribution from \mathbf{M} .

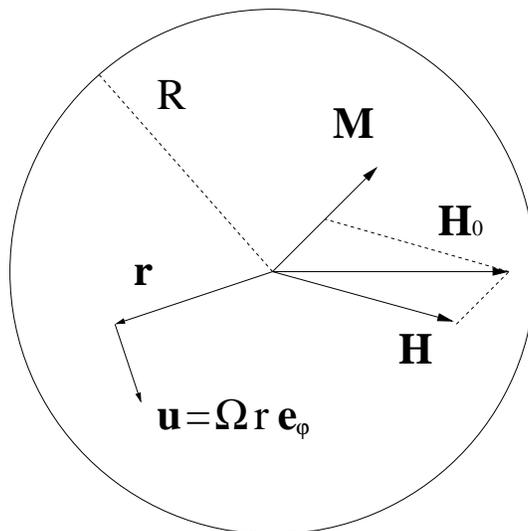


FIG. 1: Schematic plot of relevant vectors.

II. MAGNETIZATION EQUATIONS

The model equations that we compare here imply a relaxational dynamics either of \mathbf{M} towards the equilibrium magnetization

$$\mathbf{M}_{eq}(\mathbf{H}) = \frac{M_{eq}(H)}{H} \mathbf{H} = \chi(H) \mathbf{H} \quad (2.1)$$

or of the "local equilibrium" or "effective" field

$$\mathbf{H}_{eff}(\mathbf{M}) = \frac{M_{eq}^{-1}(M)}{M} \mathbf{M} = F(M) \mathbf{M} \quad (2.2)$$

towards the internal field \mathbf{H} . The equilibrium magnetization $M_{eq}(H)$ referring to the functional relation between internal field H and magnetization in the case of $\Omega = 0$ is a thermodynamic material property of the ferrofluid. The effective field \mathbf{H}_{eff} lies parallel to \mathbf{M} and can be seen as the inverse of the defining requirement

$$\mathbf{M} = \mathbf{M}_{eq}(\mathbf{H}_{eff}). \quad (2.3)$$

In equilibrium, $\Omega = 0$, one has $\mathbf{H}_{eff} = \mathbf{H}$ and $\mathbf{M} = \mathbf{M}_{eq}$.

We consider here the relations

$$\text{Debye:} \quad \boldsymbol{\Omega} \times \mathbf{M} = \frac{1}{\tau} (\mathbf{M} - \mathbf{M}_{eq}) \quad (2.4)$$

$$\text{S'72 [2]:} \quad \boldsymbol{\Omega} \times \mathbf{M} = \frac{1}{\tau} (\mathbf{M} - \mathbf{M}_{eq}) + \frac{\mu_0}{4\zeta} \mathbf{M} \times (\mathbf{M} \times \mathbf{H}) \quad (2.5)$$

$$\text{FK [3]:} \quad \boldsymbol{\Omega} \times \mathbf{M} = \gamma_H (\mathbf{H}_{eff} - \mathbf{H}) + \frac{\mu_0}{4\zeta} \mathbf{M} \times (\mathbf{M} \times \mathbf{H}) \quad (2.6)$$

$$\text{S'01 [4]:} \quad \boldsymbol{\Omega} \times \mathbf{H}_{eff} = \frac{1}{\tau} (\mathbf{H}_{eff} - \mathbf{H}) + \frac{\mu_0}{4\zeta} \mathbf{H}_{eff} \times (\mathbf{M} \times \mathbf{H}) \quad (2.7)$$

$$\text{ML [5]:} \quad \boldsymbol{\Omega} \times \mathbf{M} = \xi (\mathbf{H}_{eff} - \mathbf{H}) \quad (2.8)$$

resulting for the rotating cylinder from the above 5 models. In ML we use the weak field variant of ref. [5]. These equations have to be solved numerically in combination with the Maxwell equation (1.1).

As an aside we mention that the above equations can be written in the common form

$$\mathbf{M} \times (\boldsymbol{\Omega} + \alpha_3 \mathbf{M} \times \mathbf{H}_0) = \alpha_1 (\mathbf{H}_0 - \alpha_2 \mathbf{M}) \quad (2.9)$$

with coefficients:

Debye	$\alpha_1 = \frac{\chi}{\tau}$, $\alpha_2 = \frac{1}{\chi} + \frac{1}{2}$, $\alpha_3 = 0$
S'72	$\alpha_1 = \frac{\chi}{\tau}$, $\alpha_2 = \frac{1}{\chi} + \frac{1}{2}$, $\alpha_3 = \frac{\mu_0}{4\zeta}$
S'01	$\alpha_1 = \frac{1}{F\tau}$, $\alpha_2 = F + \frac{1}{2}$, $\alpha_3 = \frac{\mu_0}{4\zeta}$
FK	$\alpha_1 = \gamma_H$, $\alpha_2 = F + \frac{1}{2}$, $\alpha_3 = \frac{\mu_0}{4\zeta}$
ML	$\alpha_1 = \xi$, $\alpha_2 = F + \frac{1}{2}$, $\alpha_3 = 0$

III. RESULTS

In order to make the comparison of the theoretical results easier we replace the equilibrium magnetization $M_{eq}(H)$ by the Langevin expression $M_{eq}(H) = M_{sat}\mathcal{L}(3\chi_0 H/M_{sat})$ with the initial susceptibility $\chi_0 = \chi(H=0)$. We use $\chi_0 = 1.09$ and $M_{sat} = 18149A/m$ for the saturation magnetization which is appropriate for the ferrofluid APG 933 of FERROTEC. The resulting curve is shown in Fig. 2. Furthermore, we replace the relaxation time $\tau(H)$ by $\tau_B = 6 \cdot 10^{-4}s$. For $\zeta \simeq \frac{3}{2}\Phi\eta$ we use the values $\eta = 0.5Pa \cdot s$ and $\Phi = 0.041$ and for γ_H we use $\gamma_H = \chi_0/\tau_B$ [6]. For the parameter ξ of ML [5] we investigate two different choices: Either the low-field variant, $\xi = \chi_0/\tau_B$, as in FK that is denoted here by ML(F). Or the variant $\xi = 1/[F(M)\tau_B]$ as in S'01 that is denoted here by ML(S).

Especially the perpendicular component $H_y = -\frac{1}{2}M_y$ of the magnetic field is suited for a comparison of the different models with each other and with experiments. Before doing the former we should like to draw the attention to the frequency behavior of $M_y(H_0, \Omega)$. We mentioned already that M_y vanishes for zero vorticity, $\Omega = 0$. Furthermore, one finds that M_y as well as M_x vanishes also in the limit $\Omega \rightarrow \infty$. And since one can rewrite the solution of eq.(2.9) in the form $M_y = \frac{\Omega\tau}{\alpha_1 + \alpha_3 M^2} \frac{M^2}{H_0}$ one sees that $M_y(\Omega)$ has a maximum as a function of Ω as in Fig. 3. There we show H_y versus Ω .

The differences in the results for the different models are easily captured by comparing their predictions for the maximum values of $|H_y|$, the locations of these maxima at Ω^{max} , and the initial slopes $\frac{d|H_y|}{d\Omega}$ at $\Omega \rightarrow 0$, each as a function of applied field H_0 . This is done in Fig. 4.

The maximal values of $|H_y|$ of Debye and S'72 are the same while their locations, Ω^{max} , differ. The models S'01, FK, and ML formulated in terms of the effective field also share a common maximal value of $|H_y|$ being larger than that of Debye and S'72 while the location, Ω^{max} , differ partly substantially. Hence the magnetic torque, $\mathbf{M} \times \mathbf{H}$, entering into S'72,

FK, and S'01 only shifts the frequency Ω^{max} . It remains to be seen whether experiments can be performed with sufficient accuracy to discriminate between the different theoretical predictions.

-
- [1] R. E. Rosensweig, *Ferrohydrodynamics*, Cambridge University Press, Cambridge (1985).
 - [2] M. I. Shliomis, Sov. Phys. JETP **34**, 1291 (1972).
 - [3] B. U. Felderhof and H. J. Kroh, J. Chem. Phys. **110**, 7403 (1999); B. U. Felderhof, Phys. Rev. E **62**, 3848 (2000); *ibid* **64**, 063502 (2001).
 - [4] M. I. Shliomis, Phys. Rev. E **64**, 060501 (2001); *ibid* 063501 (2001).
 - [5] H. W. Müller, M. Liu, Phys. Rev. E **64**, 061405 (2001).
 - [6] B. U. Felderhof, Phys. Rev. E **64**, 021508 (2001).

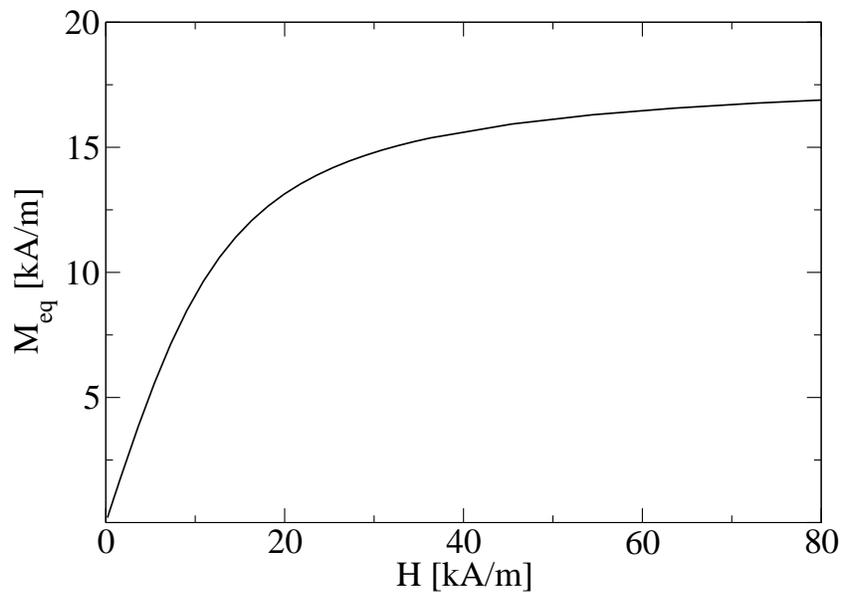


FIG. 2: Equilibrium magnetization $M_{eq}(H)$ used as input into the models compared here.

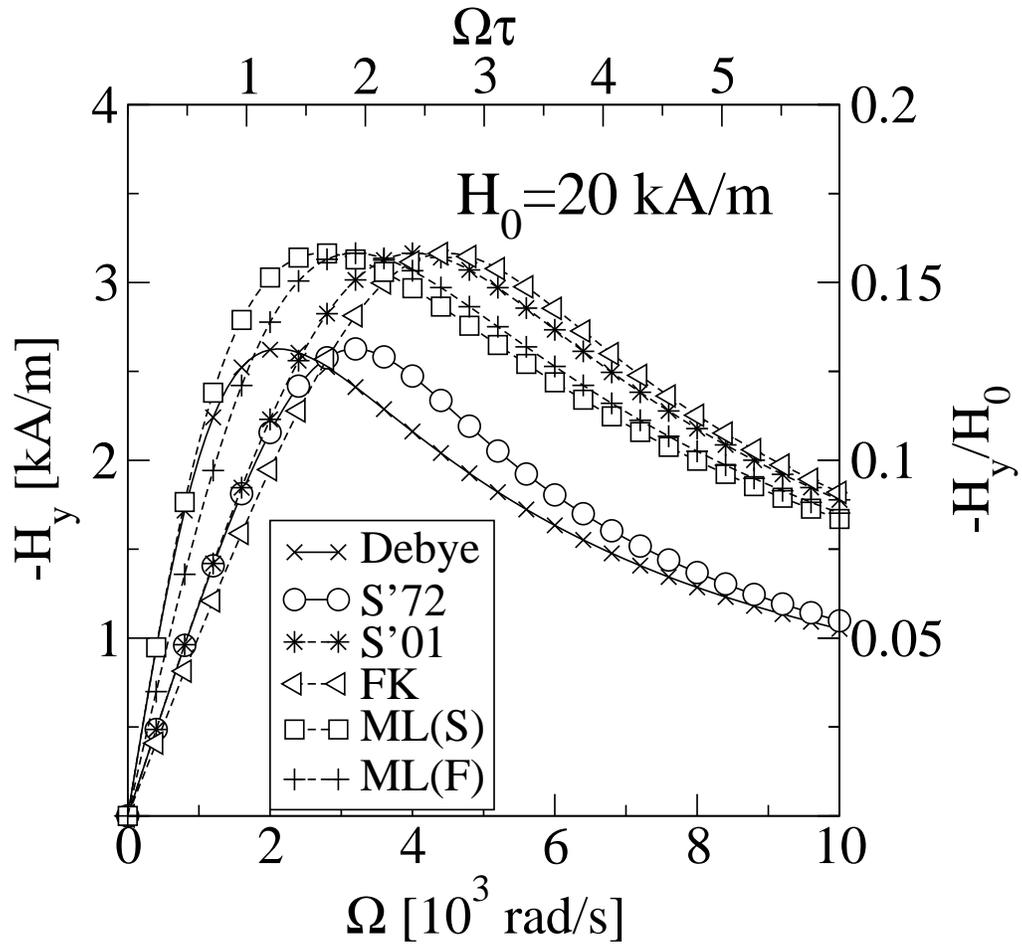


FIG. 3: Comparison of the predictions of the different theoretical models for the transverse internal field H_y versus rotation frequency Ω .

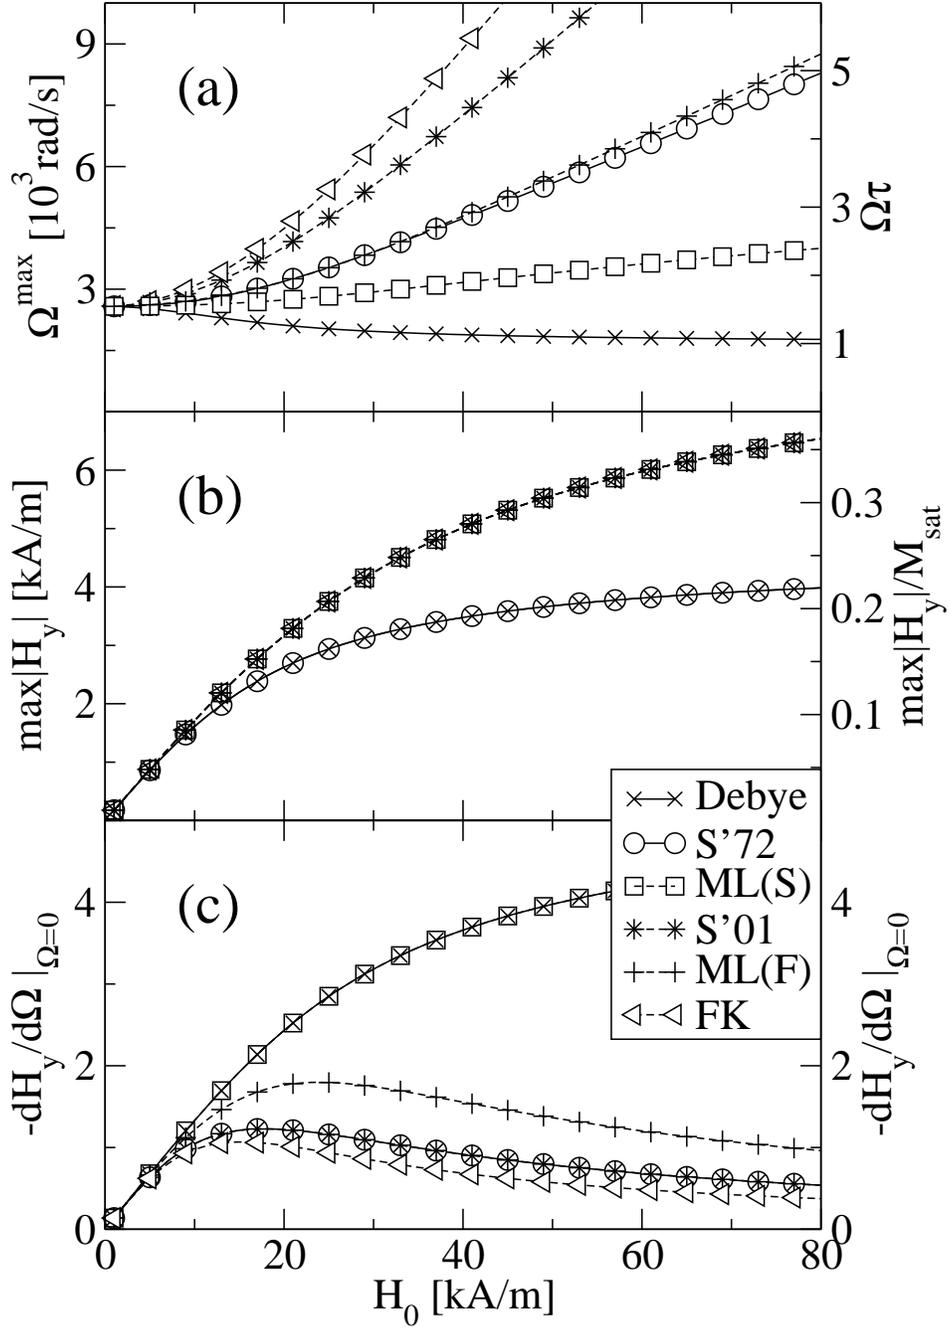


FIG. 4: (a) Frequency Ω^{\max} leading to maximal transverse field, (b) largest transverse field, and (c) initial slope $-\frac{dH_y}{d\Omega}$ at $\Omega \rightarrow 0$.